

# ALU SQUARE 2



Wall effect series. Fixtures consist of:

- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Wall effects light emission.
- 6° x 6° beam angle (C/I).
- 25° x 25° beam angle (C/M).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be removed). Consult factory for more information.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




## FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

## WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

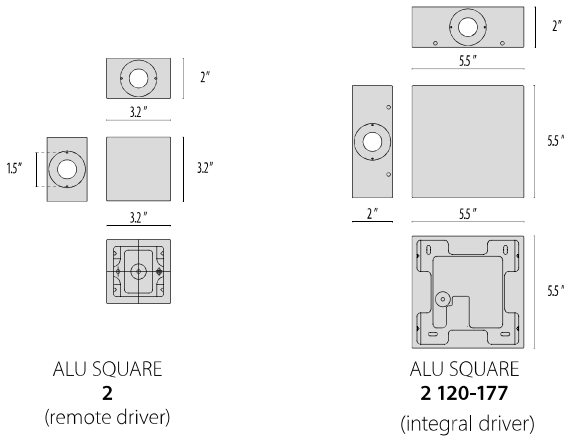

Lumen Output	27K	3K	35K	4K	6K
Alu 2 - 180°	64	71	79	86	101
Alu 2 - 120-277V- 180° - 10°x45°	82	88	94	100	112
Alu 2 - 120-277V- 180° - 40°	99	106	114	121	136
Alu 2 - 120-277V- 180° - 6°	106	114	122	130	147
Alu 2 - 120-277V- 180° - 6°+40°	102	110	117	125	141
Alu 2 - 180° - 40°	153	146	160	173	200
Alu 2 - 180° - 6°	177	200	224	247	295
Alu 2 - 180° - 6°+40°	165	175	189	204	234
Alu 2 - 180° - 10°x45°	121	132	144	155	178
Alu 2 - 120-277V- 180°	66	71	80	86	101
Alu 2 - 90°	67	72	81	88	105
Alu 2 - 90° - 6°	185	168	185	200	232
Alu 2 - 120-277V - 90°	64	72	80	88	105
Alu 2 - 120-277V- 90° - 6°	106	114	122	130	147

2.7W Max Wattage



Scan here  
for installation  
instructions

# Order Guide - Alu Square 2



Order code example

**AS2-180-RDR-6-AA-3K-NA**

**AS2-**

Light Emission	Housing Style	Optics	Finish	Kelvin	Voltage	Controls	Accessories
<b>180</b> 2 LEDs 180° apart  <b>90</b> 2 LEDs 90° apart	<b>RDR</b> Remote driver  <b>IDR</b> Integral driver	Pick Two  <b>6</b> 6 degrees  <b>25</b> 25 degrees  <b>40</b> 40 degrees  <b>ELL</b> 10x45 degrees  <b>WB</b> Wide Beam	<b>AA</b> Anodized Aluminum  <b>AB</b> Anodized Black  *Finishes Below Available <b>MOQ30 pieces*</b>  <b>AM</b> Aluminum Metallic  <b>IG</b> Iron Gray  <b>WH</b> Textured White  <b>IR</b> Iron Rust  <b>BK</b> Textured Black  <b>CC</b> Custom Color	<b>27K</b> 2700k  <b>3K</b> 3000k  <b>35K</b> 3500k  <b>4K</b> 4000k  <b>6K</b> 6000k  <b>RED</b> Static Red  <b>GRN</b> Static Green  <b>BLU</b> Static Blue  <b>AMB</b> Amber	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming  <b>0-10V</b> 0-10V Dimming  <b>ELV</b> ELV Dimming	<b>JBOX</b> Jbox cover  <b>RDR</b> Remote Driver (1:1) Other options available  <b>REM</b> Remote Emergency Battery Back-Up