


# BLIZ SQUARE 40

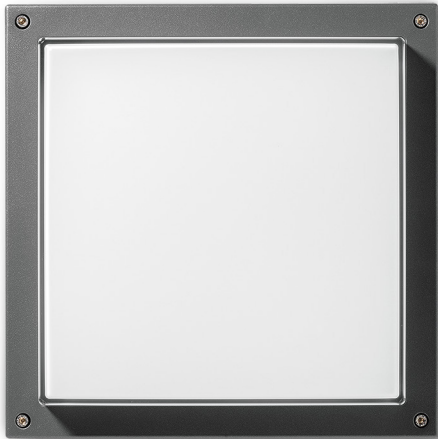

Ceiling- and wall- mount series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, pressed glass diffuser, thermally, and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, high-frequency motion-sensor


operating at a frequency of 5.8 GHz +/- 75 MHz (HF versions).

- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

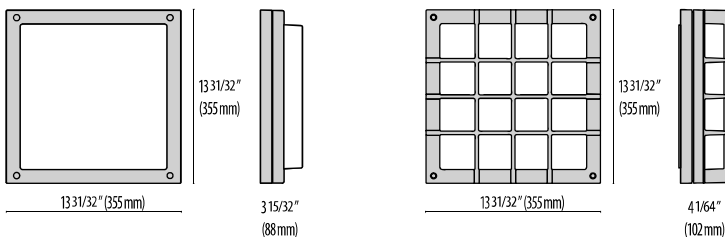

BLIZ SQUARE  
40

BLIZ ROUND  
40 GRILL

Lumen Output	27K	3K	35K	4K	6K
<b>Bliz Square 40</b>	2485	2495	2505	2515	2525
<b>Bliz Square 40 EMPK</b>	2313	2322	2331	2340	2349
<b>Bliz Square 40 HF</b>	2485	2495	2505	2515	2525
<b>Bliz Square 40 Grill</b>	2485	2495	2505	2515	2525
<b>Bliz Square 40 Grill EMPK</b>	2313	2322	2331	2340	2349
<b>Bliz Square 40 Grill HF</b>	2485	2495	2505	2515	2525

40W Max Wattage



Scan here  
for installation  
instructions

# Order Guide - Bliz Square 40



Order code example

**BS4-O-40-AM-3K-120-NA**

**BS4-**

Housing Style	Wattage	Finish	Color Temperature	Voltage	Controls	Accessories			
<b>O</b> Open	<b>20</b> 20 watt	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming	<b>HF</b> High Frequency Occupancy Sensor w/ daylight PHC			
<b>GR</b> Grill	<b>30</b> 30 watt	<b>IG</b> Iron Gray	<b>3K</b> 3000k		<b>0-10V</b> 0-10V Dimming	<b>ELV</b> ELV Dimming	<b>EMPK</b> Integral Emergency Battery Back-up		
	<b>40</b> 40 watt (MAX)	<b>IR</b> Iron Rust	<b>35K</b> 3500k	<b>ELV</b> ELV Dimming	<b>SP</b> Surge Protection				
	<b>XX</b> Specify Wattage must be below max	<b>BK</b> Textured Black	<b>4K</b> 4000k					<b>PC</b> Polycarb Diffuser	
		<b>WH</b> Textured White	<b>6K</b> 6000k						<b>REM</b> Remote Emergency Battery Back-Up
		<b>CC</b> Custom Color	<b>RGBW</b> RGBW						
		<b>AMB</b> Static Amber	<b>TP</b> Tamper Proof hardware						