

FOCUS+ 1



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, ring/faceplate, and adjustable mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- NEMA 4H x 3V light distribution (ELL).
- NEMA 3H x 3V light distribution (C/I).
- NEMA 4H x 4V light distribution (C/M).
- NEMA 5H x 5V light distribution (C/W).
- NEMA 3H x 7V light distribution (Type I).

- NEMA 5H x 6V light distribution (Type III).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Matching junction box plate optional accessory available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

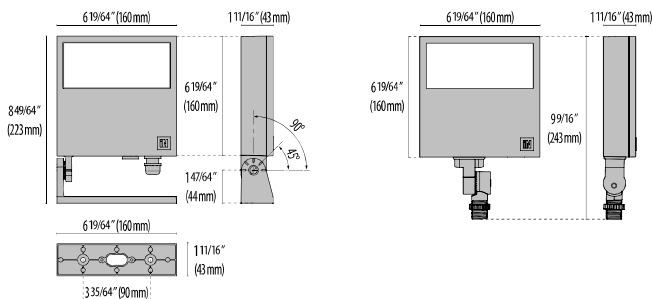

FOCUS+
1 YO

FOCUS+
1 SA

Lumen Output	27K	3K	35K	4K	6K
Focus+One C/I	1173	1247	1321	1395	1466
Focus+One C/M	1168	1242	1315	1389	1462
Focus+One C/W	1110	1180	1250	1320	1390
Focus+One ELL	1230	1307	1384	1462	1359
Focus+One T1	1101	1170	1239	1308	1377
Focus+One T3	1043	1108	1173	1239	1340

19W Max Wattage

Scan here
for installation
instructions




Order code example

F+1-YO-19-T4-AM-27K-120V-NA-FG

F+1

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories	
YO Yoke	19 19 watt (max)	T1 Type I	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	Jbox Square Jbox cover	
SA Swivel	XX Specify Wattage Must be below max	T3 Type III	IG Iron Gray	3K 3000k				
		C/I 17° beam	IR Iron Rust	35K 3500k		0-10V 0-10V Dimming	WS20 Wall Support 20" (yoke mount only)	
		C/M 34° beam	BK Textured Black	4K 4000k				
		C/W 56° beam	WH Textured White					WS40 Wall Support 40" (yoke mount only)
		ELL Elliptical 15°x45°	CC Custom Color					MC3.5 Mounting Collar for 3.5" Pole
						ELV ELV Dimming	MC2.3 Mounting Collar For 2.3" Pole	

OPTIONAL ACCESSORIES

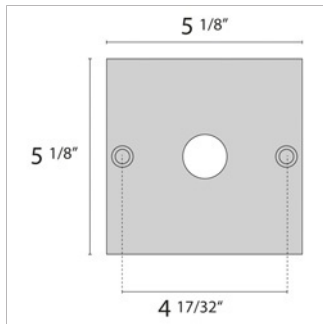

07959- Square Jbox Cover



14173394 - 20" Wall Support



14453994 - 40" Wall Support



14099696 - Mounting Collar for 3.5" Pole



14099896 - Mounting Collar for 2.3" Pole

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com