


FOCUS+ 3

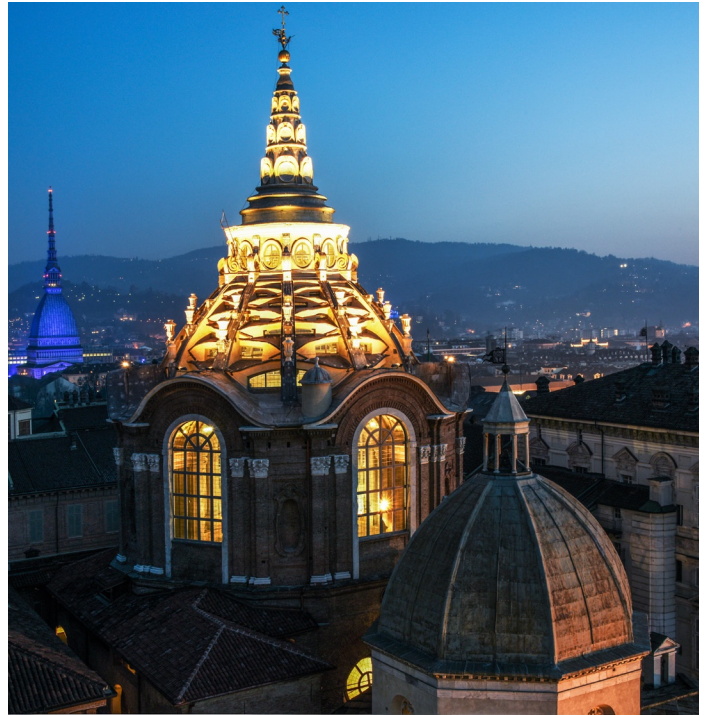

Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, ring/faceplate, and adjustable mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- NEMA 4H x 3V light distribution (ELL).
- NEMA 3H x 3V light distribution (C/I).
- NEMA 4H x 4V light distribution (C/M).
- NEMA 5H x 5V light distribution (C/W).
- NEMA 3H x 7V light distribution (Type I).

- NEMA 5H x 7V light distribution (Type III).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Matching junction box plate optional accessory available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

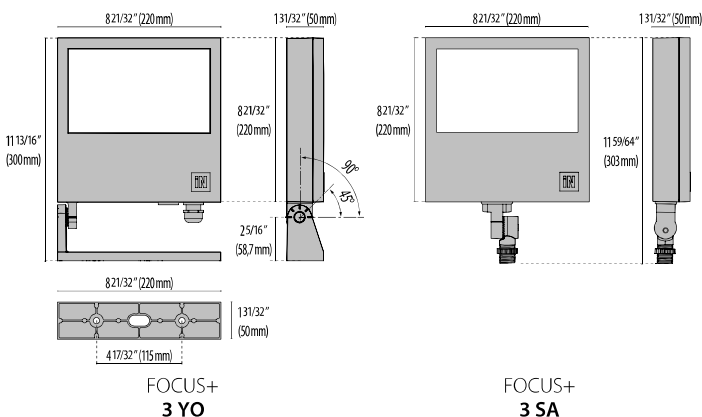

Lumen Output	27K	3K	35K	4K	6K
Focus+Three C/I	3539	3759	3979	4199	4419
Focus+Three C/M	3468	3683	3895	4114	4329
Focus+Three C/W	3248	3449	3650	3852	4053
Focus+Three ELL	3732	3964	4196	4428	4660
Focus+Three T1	3210	3409	3608	3807	4006
Focus+Three T3	3220	3420	3620	3820	4020

54W Max Wattage

Scan here
for installation
instructions



Order Guide - Focus+Three




Order code example

F+3-YO-54-T4-AM-27K-120V-NA-jbox

F+3

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
YO Standard	54 54 watt (max)	T1 Type I	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	Jbox Square Jbox cover WS20 Wall Support 20" (yoke mount only) WS40 Wall Support 40" (yoke mount only) MC3.5 Mounting Collar for 3.5" Pole MC2.3 Mounting Collar For 2.3" Pole BD Barn Door Kit
SA Swivel	XX Specify Wattage Must be below max	T3 Type III C/I 17° beam C/M 34° beam C/W 56° beam ELL Elliptical 15°x45°	IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	3K 3000k 35K 3500k 4K 4000k		0-10V 0-10V Dimming ELV ELV Dimming	

OPTIONAL ACCESSORIES

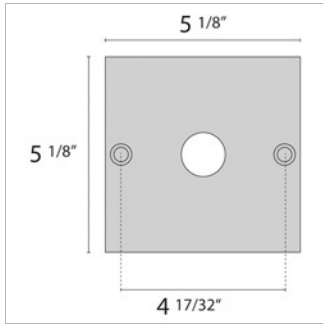

07959- Square Jbox Cover



14173394 - 20" Wall Support




14453994 - 40" Wall Support



14099696 - Mounting Collar for 3.5" Pole



14099896 - Mounting Collar for 2.3" Pole

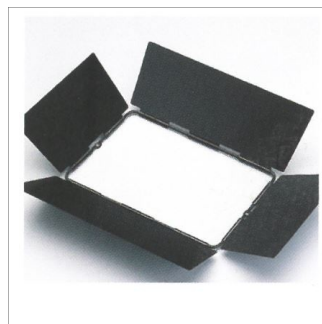

Barn Door Kit

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 04
05/23