

# GUELL 1



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Copper-free precision die-cast aluminum housing, and adjustable steel mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- NEMA 5H x 5V light distribution (C/W)
- NEMA 7H x 5V light distribution (S/W).
- NEMA 6H x 5V light distribution (Type II).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included. (5.5' standard)

- Standard quick release latch(es) allow for tool-free access.
- Standard robust ½" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Louver, frosted glass, protective grid, wall support 19.69" / 39.37", single or double pole top support, and matching junction box plate accessories available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- **Marine Grade finish.**
- Suitable for Natatorium applications.



## FINISHES

- GR-94 / Aluminum metallic / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- WH-87 / White / Textured

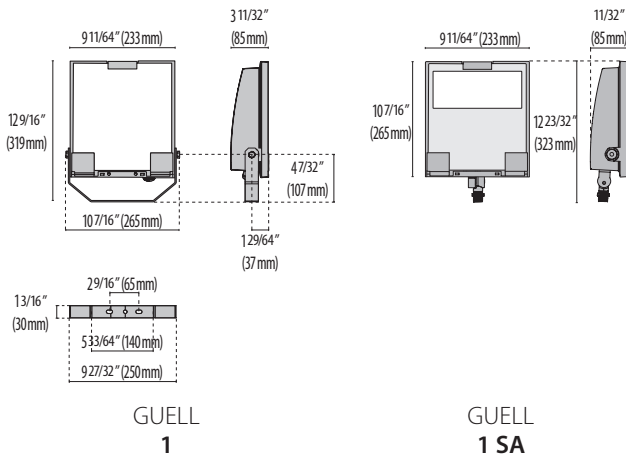

Lumen Output	3K	4K
Guell 1 C/W 45W	4165	4315
Guell 1 C/W 45W	4989	5439
Guell 1 S/W 45W	4441	4591
Guell 1 S/W 55W	5569	5719
Guell 1 T2 45W	4274	4424
Guell 1 T2 55W	5434	5584

Scan here  
for installation  
instructions



# Order Guide - Guell One



Order code example

GU1

GU1

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories	
<b>YO</b> Yoke	<b>45</b> 45 watt	<b>C/IW</b> nema 5Hx5V	<b>AM</b> Aluminum Metallic	<b>2K</b> 2000k	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming	<b>GRID</b> Protective Glass Grid Cover	
<b>SA</b> Swivel	<b>55</b> 55 watt (max)  <b>XX</b> Specify Wattage Must be below max	<b>S/W</b> nema 7Hx5V  <b>A/W</b> nema 6Hx5V	<b>IG</b> Iron Gray  <b>IR</b> Iron Rust  <b>BK</b> Textured Black  <b>WH</b> Textured White  <b>CC</b> Custom Color	<b>27K</b> 2700k		<b>0-10V</b> 0-10V Dimming	<b>ELV</b> ELV Dimming	<b>WS20"</b> Wall support 20"
				<b>3K</b> 3000k				<b>WS40"</b> Wall support 40"
				<b>35K</b> 3500k				<b>SPT</b> Single Pole top adaptor
				<b>4K</b> 4000k				<b>DPT</b> Double pole top adaptor
				<b>5K</b> 5000k				<b>Jbox</b> Plate Jbox cover (Yoke Mount Only)
				<b>65K</b> 6500k				<b>PHC</b> Button Style photocell
				<b>RED</b> Static Red				<b>FRST</b> Frosted glass lens
				<b>GRN</b> Static Green				<b>LVR</b> Louver Asymmetrical <b>Not suitable for C/IW</b>
				<b>BLU</b> Static Blue				<b>LVR2</b> Louver Symmetrical
				<b>RGBW</b> RGBW Consult factory for control details				<b>Not suitable for C/IW</b>
								<b>OCC</b> Hi/Lo Occupancy sensor
								<b>PEN1</b> Single fixture pendant
	<b>PEN2</b> Double fixture pendant							
	<b>CONSULT FACTORY</b> for PENDANT DETAILS							

# OPTIONAL ACCESSORIES

DESCRIPTION

## GUELL 1/S

Louvre GUELL 1 Symmetrical (NOT SUITABLE FOR C/IW)

## GUELL 1/A

Louvre GUELL 1 Asymmetrical (NOT SUITABLE FOR C/IW)

## GUELL 1

Soft glass GUELL 1

Protective grid GUELL 1


Wall support 500 mm/19.69" GUELL 1/2

Wall support 1000 mm/39.37" GUELL 1/2


Single pole top support GUELL 1

Double pole top support GUELL 1


Plate Cover JBox




14173020



14173120



14173294

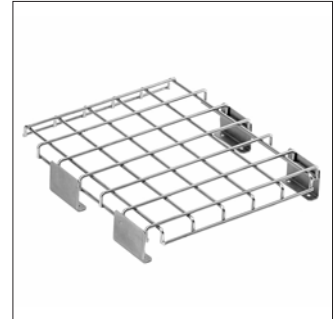


14172902




14173394




14173494

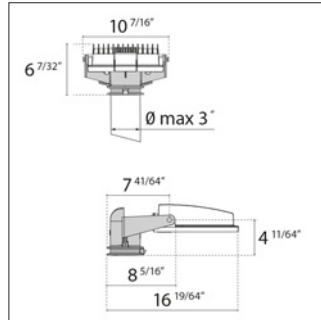

14453194

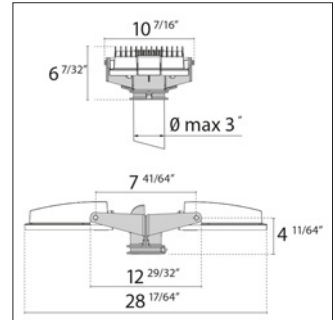

14453294

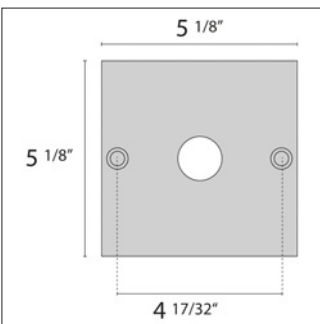


07957 (Not suitable for Swivel Option)

# GUELL PENDANTS\*


## GUELL 1 & GUELL 2 – Single fixture pendant\*

- Each fixture has its own stem/pendant (length to be specified by the customer).
- A  $\varnothing 5''$  canopy cover that matches the fixture is provided to cover the jbox.
- \*NOTE: Single pendants may not hang perfectly straight due to the offset center of gravity.

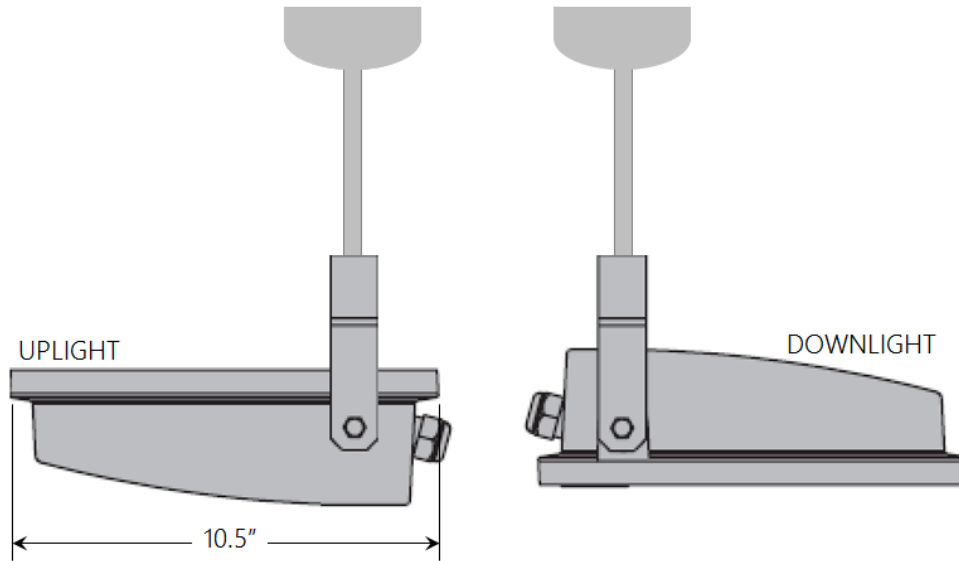

## GUELL 1 & GUELL 2 – Double fixture pendant

- Each pair of fixtures has a stem/pendant (length to be specified by the customer).
- A  $\varnothing 5''$  canopy cover that matches the fixture is provided to cover the jbox.

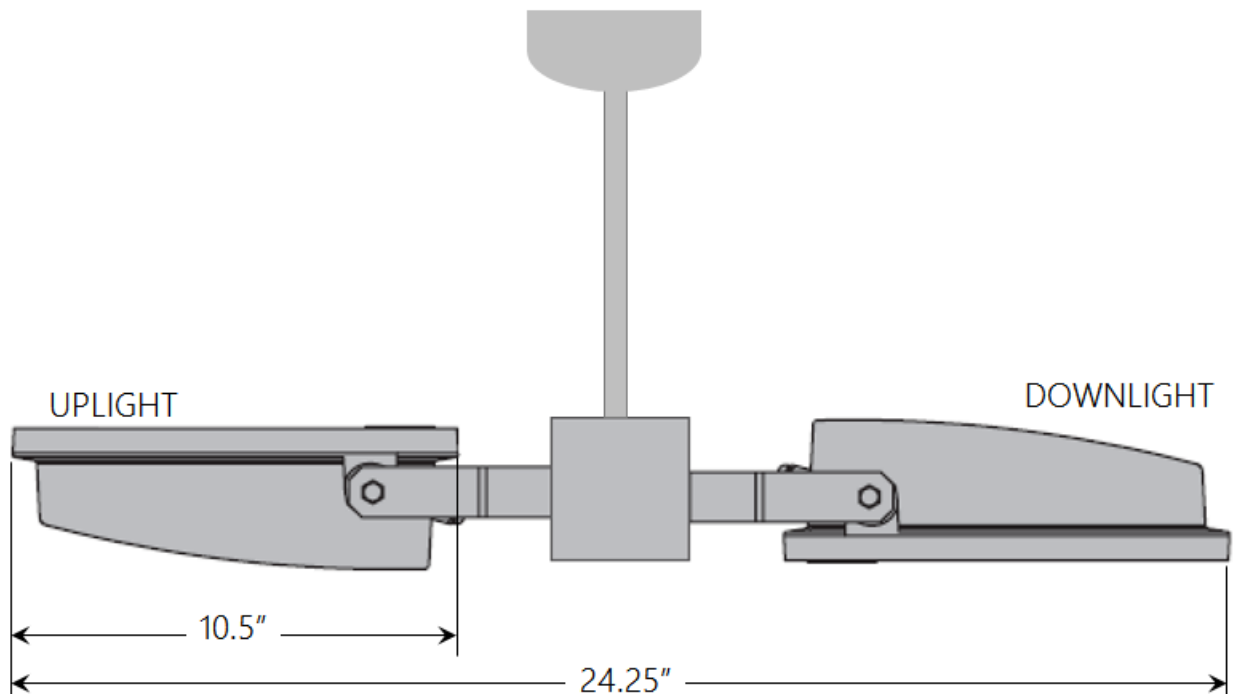


## OPTIONAL ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
<b>Controls</b>		
Kit driver 48V		<b>17433</b>
Kit driver 48V WP		<b>17096</b>
<b>RF Controls</b>		
RGBW RF controller 4 channel (0.4A each CH)		<b>3104174</b>
RGBW RF controller WP 4 channel (0.4A each CH)		<b>31041740</b>
RGBW hand held remote		<b>310429</b>
<b>WiFi Controls</b>		
RGBW WiFi controller 4 channel (0.4A each CH)		<b>3104164</b>
RGBW WiFi controller WP 4 channel (0.4A each CH)		<b>31041640</b>
<b>DMX Controls</b>		
RGBW DMX enabler/decoder 4 channel (0.4A each CH)		<b>178974</b>
RGBW DMX enabler/decoder WP 4 channel (0.4A each CH)		<b>1789740</b>
Terminating resistor		<b>11015</b>
Terminating resistor WP		<b>110150</b>



### App (free) – “EasyLighting”

EasyLighting is an application that uses a WiFi network to control, adjust, and customize the lighting color or CCT, brightness, and the rate of change. With this application you can control EasyLighting products through most mobile devices



**17433**



**17096**



**3104174**



**31041740**  
**31041640**  
**1789740**



**310429**



**3104164**



**178974**



**110150**



**11015**

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting  
www.performanceinlighting.com

**Revision 05**  
**06/23**