
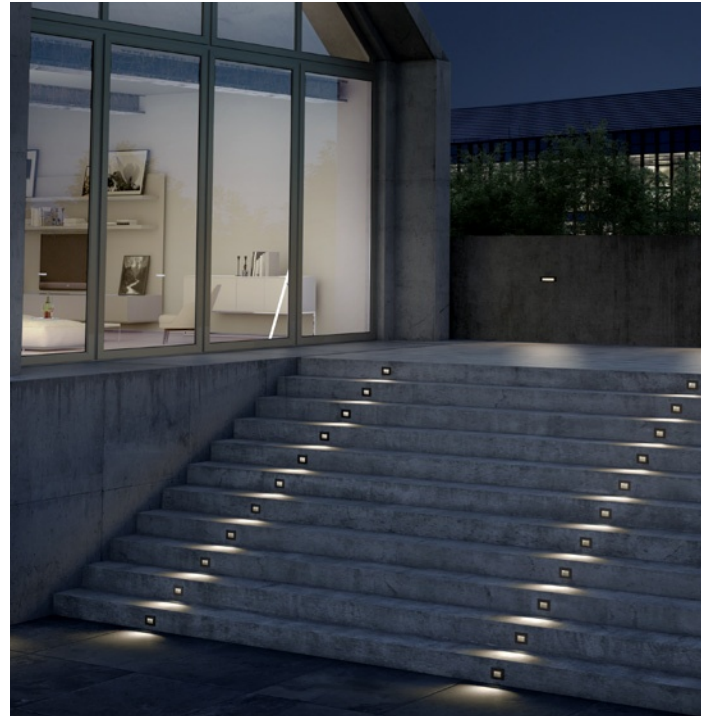


INSERT+ ZERO



Recessed wall steplight series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and ring/faceplate.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.

- IESNA Type II light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Mud Ring included for INSERT+ ZERO / ZERO CLIPS (J-Box provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

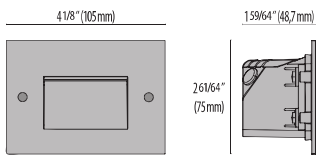

INSERT+
ZERO



INSERT+
ZERO CLIPS



Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K	6K
Insert+Zero Screw 4W	134	140	146	153	159	165
Insert+Zero Screw 6W	184	188	192	196	200	204
Insert+Zero Clips 4W	154	162	170	178	186	194
Insert+Zero Clips 6W	213	217	221	225	229	233

Order Guide - Insert+Zero




Order code example

INO-SC-6W-AM-3K-120-NA


INO-

Housing Style	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
SC Screw Version	4 4 watt	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	PHC* Photocell
	6 6 watt (max)	IG Iron Gray	3K 3000k			0-10V 0-10V Dimming (Remote Driver Only)
CL Clip Version	XX Specify Wattage Must be below max	IR Iron Rust	35K 3500k		ELV ELV Dimming (Remote Driver Only)	JBOX* Jbox Cover Plate
		BK Textured Black	4K 4000k			TP Tamper Proof hardware (Screw Version only)
		WH Textured White	5K 5000k			GFCI GFCI Outlet
		CC Custom Color	65K 6500k			Contact factory for details on non-standard installation
		AMW Anti-Microbial White	RED Static Red			PHC,OCC and GFCI Requires 3-Gang Jbox
		GRN Static Green	BLU Static Blue			
		AMB Static Amber	RGBW RGBW See Below for Control Details			

**JBOX BY OTHERS
MUDRING INCLUDED WITH FIXTURE**

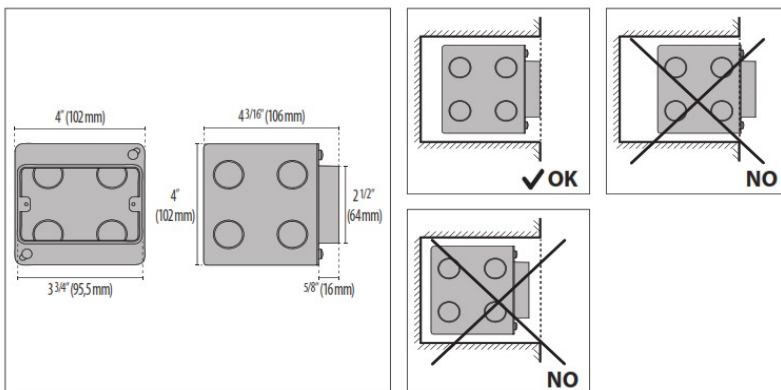

PHC Option

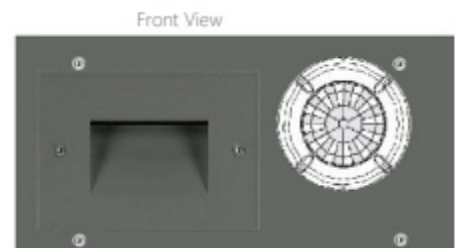

OCC Option

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

**Revision 07
05/23**

RGBW CONTROL ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
Power Supply		
Kit driver 48V WP		17347
RF Controls		
RGBW RF controller 4 channel (0.35A each CH)		3104173
RGBW RF controller WP 4 channel (0.35A each CH)		31041730
RGBW hand held remote		310429
DMX Controls		
RGBW DMX enabler/decoder 4 channel (0.35A each CH)		178973
RGBW DMX enabler/decoder WP 4 channel (0.35A each CH)		1789730
Terminating resistor		11015
Terminating resistor WP		110150

RGBW CONTROL ACCESSORIES ARE TO BE INSTALLED IN REMOTE LOCATION

NON-INTEGRAL INSTALLATION

RF Controls



17347



3104173



31041730



310429

DMX Controls



17347



178973



1789730



11015



110150