


# MIMIK 10



Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.

- Single (M) or dual (B) light emission.
- IESNA Type III light distribution (FLAT).
- IESNA Type III light distribution.
- 20° x 20° beam angle (C/I).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

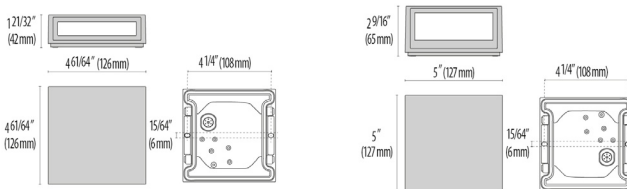

MIMIK  
10 FLAT

MIMIK  
10

Scan here  
for installation  
instructions




WATTAGE	
MIMIK 10 M T3	5W
MIMIK 10 M T3	10W
MIMIK 10 M C/I	5W
MIMIK 10 M C/I	10W
MIMIK 10 FLAT M	5W
MIMIK 10 FLAT M	10W
MIMIK 10 FLAT B	10W
MIMIK 10 B C/I	10W
MIMIK 10 B C/I+T3	10W

LUMEN OUTPUT		2700K	3000K	3500K	4000K
MIMIK 10 M T3	5W	292	314	336	358
MIMIK 10 M T3	10W	505	542	579	617
MIMIK 10 M C/I	5W	307	349	390	432
MIMIK 10 M C/I	10W	607	653	699	745
MIMIK 10 FLAT M	5W	440	451	462	473
MIMIK 10 FLAT M	10W	751	771	790	810
MIMIK 10 FLAT B	10W	857	880	902	925
MIMIK 10 B C/I	10W	725	779	833	888
MIMIK 10 B C/I+T3	10W	657	707	756	806

Revision 05  
07/23

## Façade Cover

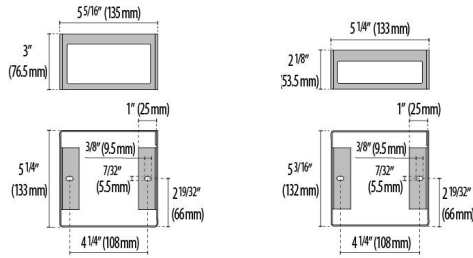


Standard

Flat



## Signage



## Shield Vertical

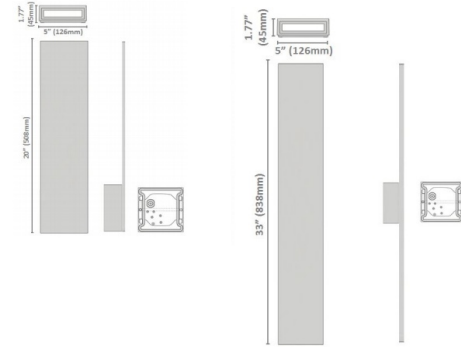

## Shield Square

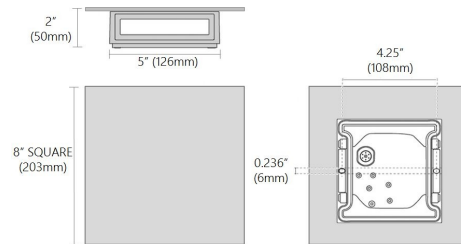

**CON**  
Surface Mounted  
J-box with Conduit  
Entry

## Order Guide - Mimik 10

Order code example

**M10F-B-AM-27K-120V-NA**

M10-

Housing Style	Light Emission	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
<b>M10</b> Standard	<b>M</b> (One-Way)	<b>5W</b> 5 watts	(Standard only) (Choose one for M & two for B )	<b>AM</b> Aluminum Metallic	<b>Static Colors (flat only)</b> 27K 2700k	<b>UNV</b> 120-277V	(When selecting Flat housing these options must be remote) <b>NA</b> Non Dimming <b>0-10V</b> 0-10V Dimming <b>ELV</b> ELV Dimming	(See pictures below) <b>FC</b> Facade cover <b>SV</b> Shield Vertical (33"x5") <b>SS</b> Shield Square (8" Square) <b>SIGN</b> Signage <b>REM</b> Remote mounted Emergency battery back up <b>RDR</b> Remote Lutron driver <b>CON</b> Surface Mounted J-box with Conduit Entry
<b>M10F</b> Flat	<b>B</b> (Two-Way)	<b>10W</b> 10 watts (max)  <b>XX</b> Specify wattage must be below max	<b>T3</b> Type III  <b>C/I</b> 20° beam	<b>IG</b> Iron Gray  <b>IR</b> Iron Rust  <b>BK</b> Textured Black  <b>WH</b> Textured White  <b>CC</b> Custom Color	<b>RED</b> Satic Red (Flat Only)  <b>GRN</b> Static Green (Flat Only)  <b>BLU</b> Static Blue (Flat Only)  <b>AMB</b> Static Amber (Flat Only)			