

# MIMIK 10 CEILING



Ceiling mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.

- 20° x 20° beam angle (C/I).
- 100° x 100° beam angle (TECH).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

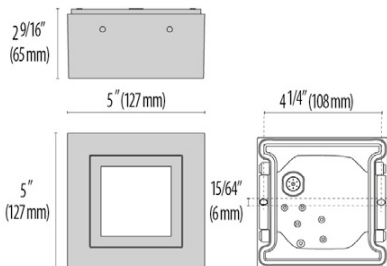

MIMIK  
10 CEILING

Lumen Output	27K	3K	35K	4K	5K
Mimik 10 Ceiling C/I	555	600	645	690	735
Mimik 10 Ceiling Tech	648	701	753	806	856

10W Max Wattage

Scan here  
for installation  
instructions



# Order Guide - MIMIK 10 CEILING




Order code example

**M10C-10W-C/I-AM-3K-120-NA**

M10C

Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
<b>10W</b> 10 watt (max)  <b>XX</b> Specify wattage must be under max	<b>C/I</b> 20° Beam	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming	<b>CON</b> Surface Mounted J-box with Conduit Entry
		<b>34</b> 34° Beam	<b>3K</b> 3000k			
	<b>56</b> 56° Beam	<b>IR</b> Iron Rust	<b>35K</b> 3500k		<b>ELV</b> ELV Dimming (remote only)	
		<b>BK</b> Textured Black	<b>4K</b> 4000k			
	<b>TECH</b> 100°x100° Beam	<b>WH</b> Textured White	<b>5K</b> 5000K			
		<b>CC</b> Custom Color	<b>65K</b> 6500K			
		<b>RED</b> Static Red				
		<b>BLU</b> Static Blue				
		<b>GRN</b> Static Green				
		<b>RGBW</b> RGBW* Contact factory for control details				



Conduit Entry  
Jbox

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting  
[www.performanceinlighting.com](http://www.performanceinlighting.com)

Revision 02  
10/22