

# MIMIK 30



Wall mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.

- IESNA Type II light distribution (FLAT).
- IESNA Type II light distribution.
- IESNA Type III light distribution.
- IESNA Type IV light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

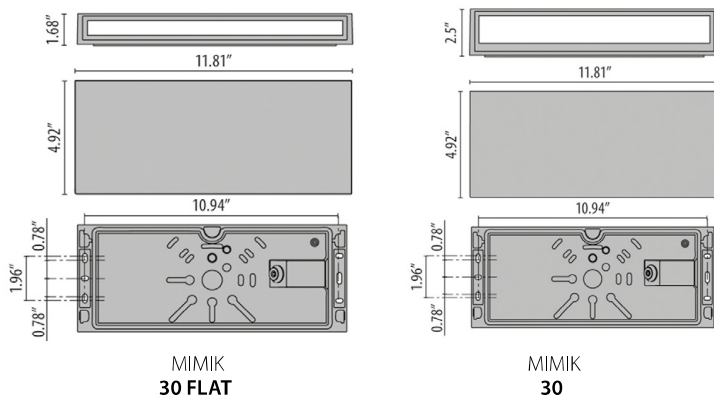

LUMEN OUTPUT	2700K	3000K	3500K	4000K
MIMIK 30 M T2 36W	2448	2549	2649	2750
MIMIK 30 M T3 36W	2503	2603	2703	2803
MIMIK 30 M T4 36W	2322	2415	2508	2602
MIMIK 30 FLAT M 20W	1461	1506	1551	1597



Scan here  
for installation  
instructions

WATTAGE	
MIMIK 30 M	18W
MIMIK 30 M	23W
MIMIK 30 M	26W
MIMIK 30 M	36W
MIMIK 30 FLAT M	20W

Revision 05  
05/23

# Order Guide - Mimik 30



Order code example

M30-10-T4-AM-27K-120V-NA-FG

M30-

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
M30 Standard	20 20 watt (Flat max)	(standard only) (leave blank for flat)  T2 Type II	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	REM Remote battery back-up
M30F Flat	18 18 watt	T3 Type III	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming	FRST Frosted glass
	23 23 watt	T4 Type IV	IR Iron Rust	35K 3500k		ELV ELV Dimming	PHC-B Photocell Button
	26 26 watt		BK Textured Black	4K 4000k			FC Facade Cover (Flat Only)
	36 36 watt (max)		WH Textured White				OCC Occupancy Sensor
	XX Specify wattage must be below max		CC Custom Color				

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting  
www.performanceinlighting.com

Revision 05  
05/23