

NIKKO+21



Open



Grill



V Shade

Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

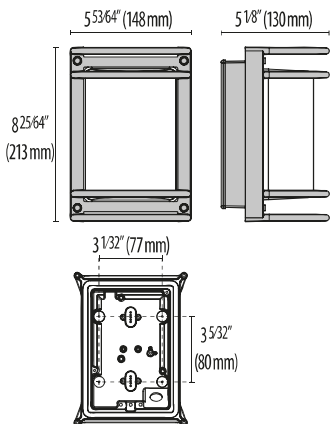

NIKKO
+21 LED

Lumen Output	27K	3K	35K	4K	5K
Nikko+21	784	803	821	840	858
Nikko+21 Grill	429	439	449	459	469
Nikko+21 Visa	367	381	395	409	423

11W Max Wattage

Scan here
for installation
instructions



Order Guide - Nikko+21




Order code example


N21-V-11-IG-3K-120-NA-WB

N21-


Trim Style	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
OP Open	11 11 watt (max)	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	REM Remote Mounted Emergency Battery Back Up
G Grill		IG Iron Gray	3K 3000k			
V Shade		Specify Wattage Must be below max	IR Iron Rust			
		BK Textured Black	4K 4000k		ELV ELV Dimming	WB Wall Bracket
		WH Textured White	5K 5000k			P7 7.8" Post
		CC Custom Color	65K 6500k			P22 22.95" Post
			RED Static Red			P32 32.79" Post
			BLU Static Blue			
			GRN Static Green			

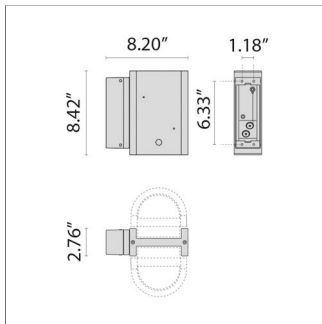


WB
Wall Bracket

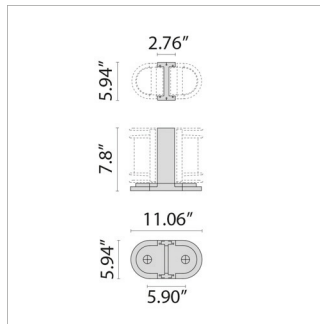

P7
7.8" Post

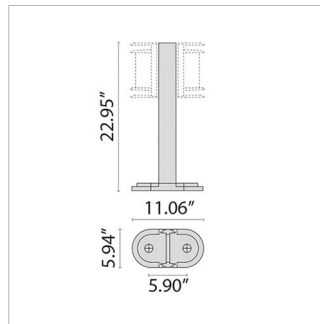

P22
22.95" Post

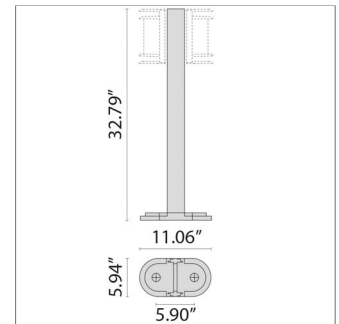

P32
32.79" Post

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 02
10/22