

NIKKO+27



Open



Grill



V Shade

Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

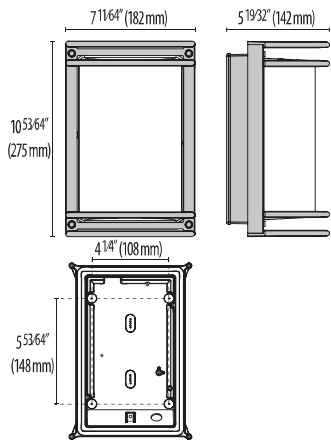

NIKKO
+27 LED

| Lumen Output | 27K | 3K | 35K | 4K | 5K |
|-----------------------|-------------|-------------|-------------|-------------|-------------|
| Nikko+27 | 1218 | 1248 | 1278 | 1309 | 1339 |
| Nikko+27 Grill | 638 | 654 | 670 | 686 | 718 |
| Nikko+27 Visa | 639 | 654 | 670 | 687 | 719 |

11W Max Wattage

Scan here
for installation
instructions



Order Guide - Nikko+27




Order code example


N27-OP-11-AM-3K-120-NA-WB

N27-


| Trim Style | Wattage | Finish | Kelvin | Voltage | Controls | Accessories |
|------------------------|------------------------------|--------------------------------|----------------------------|------------------------|-------------------------------|--|
| OP Open Trim | 22 22 watt (max) | AM Aluminum Metallic | 27K 2700k | UNV 120-277V | NA Non Dimming | REM Remote Mounted Emergency Battery Back-Up |
| G Grill | XX Specify Wattage | IG Iron Gray | 3K 3000k | | 0-10V 0-10V Dimming | WB Wall Bracket |
| V Shade | Must be below max | IR Iron Rust | 35K 3500k | | ELV ELV Dimming | P10 10.43" Post |
| | | BK Textured Black | 4K 4000k | | | P32 32.79" Post |
| | | WH Textured White | 5K 5000k | | | P48 48.54" Post |
| | | CC Custom Color | 65K 6500k | | | |
| | | | RED Static Red | | | |
| | | | BLU Static Blue | | | |
| | | | GRN Static Green | | | |

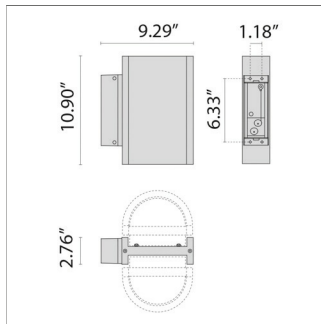


WB
Wall Bracket

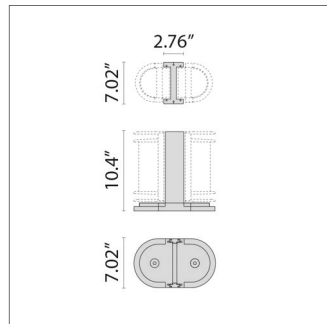

P10
10.4" Post

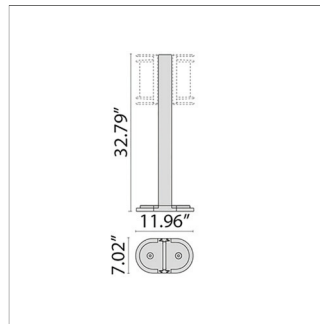

P32
32.79" Post

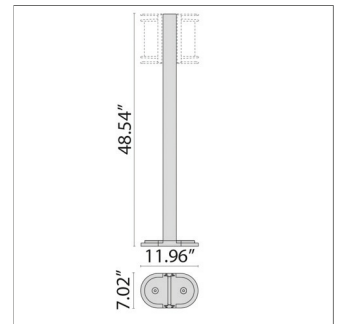

P48
48.54" Post