

NIKKO+45



Open



Split



Grill

Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- Copper-free aluminum extruded post.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.

- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- RB-10 / Iron rust / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

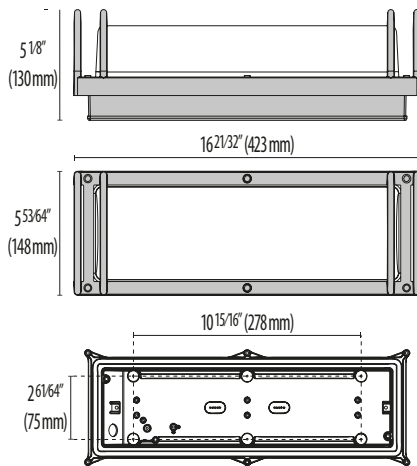

NIKKO
+45 LED

| Lumen Output | 27K | 3K | 35K | 4K | 5K |
|----------------|-----|-----|-----|-----|-----|
| Nikko+45 | 664 | 702 | 740 | 778 | 816 |
| Nikko+45 Grill | 363 | 384 | 404 | 425 | 445 |
| Nikko+45 Split | 324 | 340 | 356 | 372 | 404 |

24W Max Wattage



Scan here
for installation
instructions

Order Guide - Nikko+45




Order code example


N45-OP-24-AM-3K-120-NA-REM

N45-


| Trim Style | Wattage | Finish | Kelvin | Voltage | Controls | Accessories |
|----------------------------|--|-----------------------------------|---------------------|------------------------|---------------------------|--|
| OP Open | 24 24 watt (max) | AM Aluminum Metallic | 27K 2700k | UNV 120-277V | NA Non Dimming | REM Remote Mounted Emergency Battery Back Up |
| G Grill | | IG Iron Gray | 3K 3000k | | | |
| S Split | XX Specify Wattage Must be below max | IR Iron Rust | 35K 3500k | | ELV ELV Dimming | WB Wall Bracket |
| | | BK Textured Black | 4K 4000k | | | |
| | | WH Textured White | 5K 5000k | | | |
| | | CC Custom Color | 65K 6500k | | | |
| | | RED Static Red | | | | |
| BLU Static Blue | | | | | | |
| GRN Static Green | | | | | | |
| | | | | | | P16 16.4" Post |
| | | | | | | P32 32.79" Post |
| | | | | | | P48 48.54" Post |

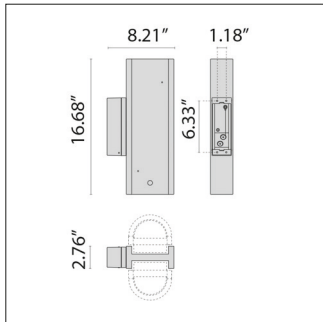


WB
Wall Bracket

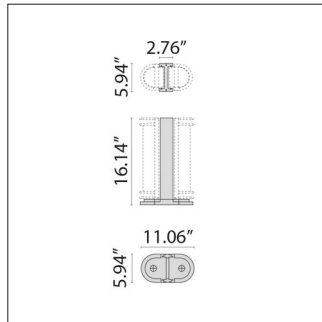

P16
16.4" Post

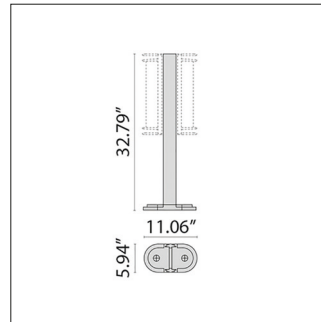

P32
32.79" Post

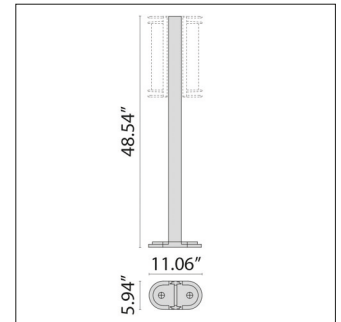

P48
48.54" Post