

# Q-LIGHT

PERFORMANCE  
**iN** LIGHTING

powered by  
**GEWISS**



Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) aluminum extruded post.
- Copper-free (<1%) precision die-cast aluminum housing and top cap.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.

- Steel ground base plate included for bollards.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Product meets Buy American Act (BAA) requirements within ARRA.
- 5-year warranty.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

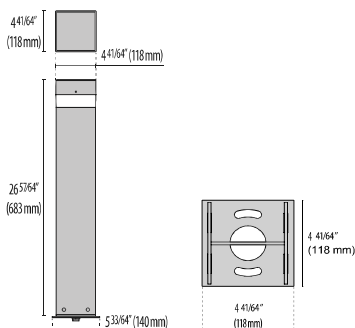

Q-LIGHT

BASE DETAIL

LUMEN OUTPUT						
	27K	30K	35K	40K	50K	65K
14W	965	1032	1099	1166	1233	1300
21W	1389	1480	1571	1662	1753	1844

Scan here  
for installation  
instructions



PERFORMANCE iN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE iN LIGHTING USA, Inc.  
2621 Keys Pointe Conyers GA 30013 - United States  
Tel: 770 822 2115

info.usa@pil.lighting  
www.performanceinlighting.com/us

REVISION 01  
07/23

# Order Guide – Q-Light



Order code example: QL-26-21W -4K -AM-UNV-NA


QL-							
SERIES	Bollard Height	Wattage	CCT	Finish	Voltage	Controls	Accessories
QL Q-Light Bollard	26 26 inch*	14W 14 watt*	27K 2700 Kelvin	AM Aluminum Metallic*	UNV 120-277V*	0-10V 0-10V Dim*	GFCI 20 Amp Outlet
	38 38 inch	21W 21 watt* (Max)	3K 3000 Kelvin*	IG Iron Gray*	120V 120V only	ELV ELV Dim	USB 4-Port USB Outlet
	42 42 inch	XX Specify wattage must be within range	35K 3500 Kelvin	IR Iron Rust			
	XX Specify Height		4K 4000 Kelvin*	BK Black	WH White	CC Custom Color	HSS House Side Shield
			5K 5000 Kelvin				
			65K 6500 Kelvin				
			AMB Static Amber				
			RED Static Red				
			BLU Static Blue				PHC Photocell
			GRN Static Green				

\*STANDARD OPTION, SHORTER LEAD TIME, NO MOQ\*

TEMPLATE AND ANCHOR BOLTS INCLUDED WITH FIXTURE  
80 CRI STANDARD - OTHER OPTIONS AVAILABLE

**REQUIRED FOR INSTALLATION** Included with Fixture

DESCRIPTION	FINISH	PART NUMBER
<b>Q-LIGHT</b> Concrete mounting adaptor with stainless steel plate and galvanised steel rods		<b>310398</b>



**310398**