

QUASAR 30



Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- Single (TECH) or dual (DOUBLETECH) light emission.
- IESNA Type I light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

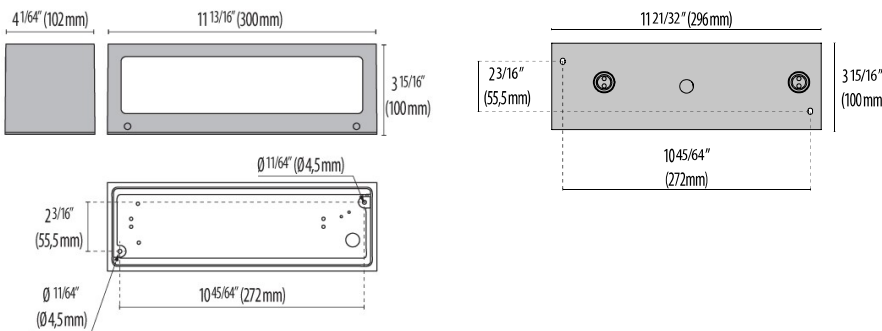

QUASAR
30



Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K
Quasar 30 Tech	1272	1350	1427	1505	1582
Quasar 30 Double Tech	1944	2046	2148	2251	2352

22W/35W Max Wattage

Order Guide - Quasar 30



Order code example

Q30-B-WH-35-T1-T1-3K-120

Q30-

Output	Wattage	Finish	Optics	Kelvin	Voltage	Controls	Options
M (One-Way)	22 22 watt (M Max)	AM Aluminum Metallic	Choose One for M & Two for B T1 Type 1	27K 2700K	UNV 120-277V	NA Non Dimming	REM Remote Emergency Battery Back-Up
B (Two-Way)	35 35 watt (B Max)	IG Iron Gray	NB Narrow Beam	3K 3000K			
	XX Specify Wattage Must be below max	IR Iron Rust		35K 3500K		0-10V 0-10V Dimming	
		BK Textured Black		4K 4000K		ELV ELV Dimming	
		WH Textured White		5K 5000K			
		CC Custom Color		BLU Static Blue			
				RED Static Red			
				GRN Static Green			
				RGBW RGBW Consult factory for control details			