

# QUASAR 60



Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.

- IESNA Type II light distribution.
- Single (TECH) or dual (DOUBLE TECH) light emission.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

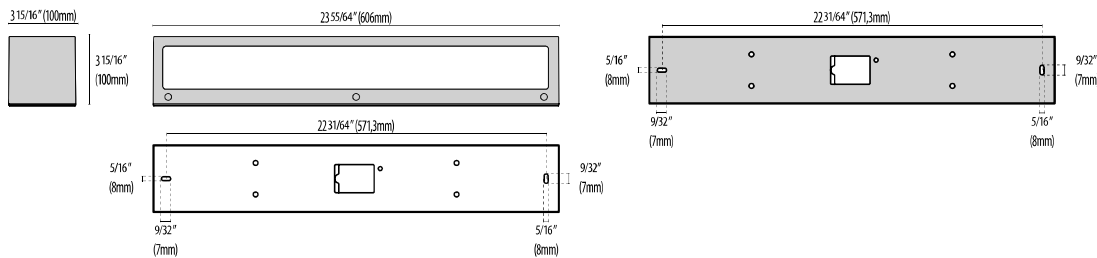

QUASAR  
60



Scan here  
for installation  
instructions

Lumen Output	27K	3K	35K	4K	5K
Quasar 60 M	1619	1631	1643	1655	1667
Quasar 60 B	3181	3204	3227	3250	3296
Quasar 60 Tech	2036	2050	2064	2078	2092
Quasar 60 Double Tech	3998	4026	4054	4082	4110
Quasar 60 M EMPK	1619	1631	1643	1655	1667
Quasar 60 Tech EMPK	2036	2050	2064	2078	2092

19W/38W Max Wattage

Revision 03  
01/23

# Order Guide - Quasar 60



Order code example

**Q60-B-AM-38-T3/T3-3K-120-NA**

Q60-

Output	Wattage	Finish	Optics	Kelvin	Voltage	Controls	Options
<b>M</b> (One-Way)  <b>B</b> (Two-Way)	<b>19</b> 19 watt (M Max)  <b>38</b> 38 watt (B Max)  <b>XX</b> Specify Wattage Must be below max	<b>AM</b> Aluminum Metallic  <b>IG</b> Iron Gray  <b>IR</b> Iron Rust  <b>BK</b> Textured Black  <b>WH</b> Textured White  <b>CC</b> Custom Color	Choose One for M & Two for B  <b>T2</b> Type II  <b>T3</b> Type III	<b>27K</b> 2700K  <b>3K</b> 3000K  <b>35K</b> 3500K  <b>4K</b> 4000K	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming  <b>0-10V</b> 0-10V Dimming  <b>ELV</b> ELV Dimming	<b>EMPK</b> Integral Emergency Battery Back-Up (M Only)  <b>REM</b> Remote Emergency Battery Back-Up  <b>PHC</b> Photocell (M Only)  <b>OCC</b> Occupancy Sensor (M Only)