


STRIP SQUARE+

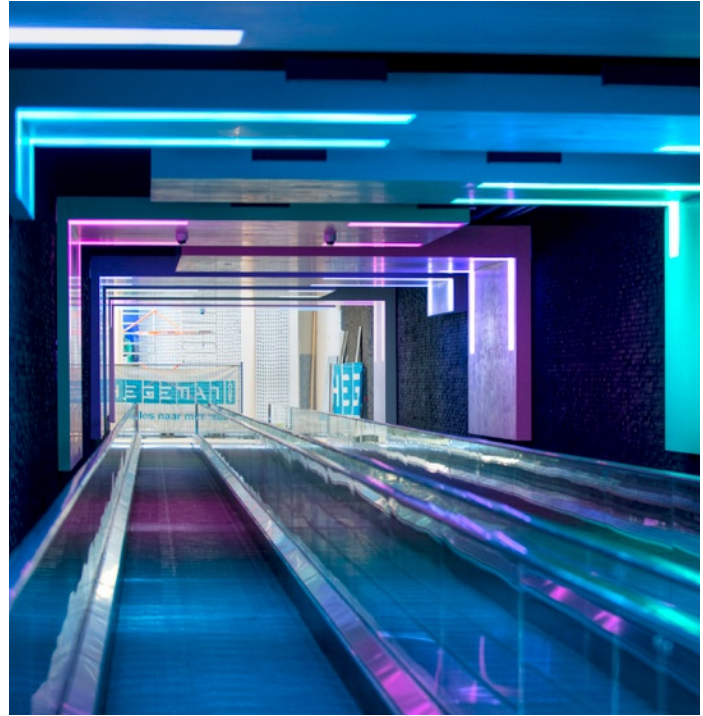

Linear surface mount series. Fixtures consist of:


- Copper-free aluminum die-cast end-caps, extruded, and anodized housing.
- Copper-free aluminum extruded and anodized field-adjustable mounting bracket for aiming the luminaire.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- 9° x 9° beam angle (C/I).
- 15° x 45° beam angle (ELL).
- 40° x 60° beam angle (ELL).
- NEMA 5H x 4V light distribution (A18/M).
- 15° x 45° beam angle (RGBW).
- 15° x 45° beam angle (2700K - 6500K Dynamic Tunable White).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Input voltage: 48 V DC, separate driver (Dynamic Color

- Change versions).
- Pre-wired factory sealed cable for external electrical connection included.
- Consult factory for custom pre-wired factory sealed cable length options.
- Various lengths arm/brackets available. Consult factory for more information.
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN96-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Frosted (FRST) glass option available - add suffix to any part number.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- AIS Compliant




FINISHES



- GR-EV1 / Anodized aluminum / Matt
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured




STRIP SQUARE+
528 (20.79")



STRIP SQUARE+
780 (30.71")



STRIP SQUARE+
1032 (40.63")



STRIP SQUARE+
1284 (50.55")



Scan here
for installation
instructions

Order Guide - Strip Square+



Order code example **SS+528-14-C/I-AM-3K-120-NA**

| Housing Style | Wattage | Optics | Finish | Kelvin | Voltage | Controls | Accessories |
|-----------------------|--|-----------------------------------|---|--|------------------------|--|--|
| 528 20.79" | 14 14 watt (528) | A/M 18° Asymmetric Beam | AA Anodized Aluminum (standard) | 27K 2700k | UNV 120-277V | NA Non Dimming | FRST Frosted Glass |
| 780 30.71" | 30 30 watt (528 Max) | C/I 9° Beam | AM Aluminum Metallic | 3K 3000k | | 0-10V 0-10V Dimming | SP Surge Protector |
| 1032 40.63" | 21 21 watt (780) | 15 15° Beam | IG Iron Gray | 35K 3500k | | ELV ELV Dimming not available with all wattage options | 40WS 40" Wall Support Arm |
| 1284 50.55" | 43 43 watt (780 Max) | 20 20° Beam | IR Iron Rust | 4K 4000k | | | EA12 Extension Arm 12" |
| | 27 27 watt (1032) | 30 30° Beam | BK Textured Black | 5K 5000K | | | EA18 Extension Arm 18" |
| | 55 55 watt (1032 Max) | 40 40° Beam | WH Textured White | 65K 6500K | | | EA24 Extension Arm 24" |
| | 33 33 watt (1284) | 70 70° Beam | CC Custom Color | RED Static Red | | | EAXX Specify Arm Length (40" Max) (3" is standard) |
| | 67 67 watt (1284 Max) | ELL1 15°x45° | | BLU Static Blue | | | 2CAB 2 Cable option through-wiring |
| | XX Specify wattage Must be below max | ELL2 40°x60° | | GRN Static Green | | | RKIT3C Run Kit 3-wire cable |
| | Wattage on RGBW fixtures cannot be changed. Chart below | | | AMB Amber | | | RKIT5C Run Kit 5-wire cable |
| | | | | RGBW RGBW (ELL1 ONLY) | | | |
| | | | | TW Tunable White (2700k-6500k) (ELL1 ONLY) | | | |
| | | | | CONTACT FACTORY FOR CONTROL DETAILS | | | |


RGBW Wattage

| | |
|-------------------------|-----|
| Strip Square+ 528 RGBW | 19W |
| Strip Square+ 780 RGBW | 28W |
| Strip Square+ 1032 RGBW | 37W |
| Strip Square+ 1284 RGBW | 46W |

OPTIONS / ADD-ONS:



Extension arm - Aluminum Metallic
 1074-AM (12")
 1071-AM (18")
 1045-AM (24")
 For other finishes, please replace "-AM"
 with appropriate suffix (i.e. "-BK" for black)



120V ELV dimmable driver
 add "-ELV" suffix
 (not available for all lumen levels,
 check with factory for details)




40" Wall Support - Aluminum Metallic
 14453994
 For other finishes, please add the
 appropriate suffix (i.e. "-BK" for black)



Surge Protector
 add "-SP" suffix



Frosted Glass
 add "FRST" suffix
 (colored glass is available, contact
 factory for additional details)




2-cable option
 add "-2WHIP" suffix
 Cables are black unless otherwise specified
 Option to be used in conjunction with
 at least one "run kit" (see below).

Run Kit accessory codes:

- 310247 (using 3-wire cable, Non Dimming or ELV DIM)
- 310247-DIM (using 5-wire cable, 0-10V Dimming)

Kits include:

- jbox cover
- 1' cable
- cable gland
- female connector
- male connector with cap to end run

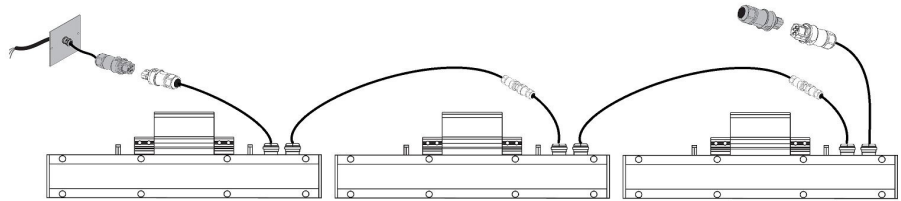


OPTIONAL ACCESSORIES

| DESCRIPTION | FINISH | PART NUMBER |
|--|--------|-----------------|
| Controls | | |
| Kit driver 48V | | 17433 |
| Kit driver 48V WP | | 17096 |
| RF Controls | | |
| RGBW RF controller 4 channel (0.4A each CH) | | 3104174 |
| RGBW RF controller WP 4 channel (0.4A each CH) | | 31041740 |
| RGBW hand held remote | | 310429 |
| TW RF controller 4 channel (0.525A each CH) | | 3104275 |
| TW RF controller WP 4 channel (0.525A each CH) | | 31042750 |
| TW hand held remote | | 310421 |
| WiFi Controls | | |
| RGBW WiFi controller 4 channel (0.4A each CH) | | 3104164 |
| RGBW WiFi controller WP 4 channel (0.4A each CH) | | 31041640 |
| TW WiFi controller 4 channel (0.525A each CH) | | 3104265 |
| TW WiFi controller WP 4 channel (0.525A each CH) | | 31042650 |
| DMX Controls | | |
| RGBW DMX enabler/decoder 4 channel (0.4A each CH) | | 178974 |
| RGBW DMX enabler/decoder WP 4 channel (0.4A each CH) | | 1789740 |
| TW DMX enabler/decoder 4 channel (0.525A each CH) | | 178975 |
| TW DMX enabler/decoder WP 4 channel (0.525A each CH) | | 1789750 |
| Terminating resistor | | 11015 |
| Terminating resistor WP | | 110150 |



App (free) – “EasyLighting”

EasyLighting is an application that uses a WiFi network to control, adjust, and customize the lighting color or CCT, brightness, and the rate of change. With this application you can control EasyLighting products through most mobile devices



17433



17096




3104174
3104275



31041740
31042750
31041640
31042650
1789740
1789750



310429



310421



3104164
3104265



178974
178975



11015



110150

LUMEN VALUES

| Lumen Output | 3K | 4K |
|-------------------------|------|------|
| Strip Sq+ 528 A/M 14W | 1374 | 1468 |
| Strip Sq+ 528 A/M 30W | 2437 | 2602 |
| Strip Sq+ 528 C/I 14W | 1425 | 1519 |
| Strip Sq+ 528 C/I 30W | 2527 | 2694 |
| Strip Sq+ 528 15x45 14W | 1385 | 1479 |
| Strip Sq+ 528 15x45 30W | 2455 | 2622 |
| Strip Sq+ 528 40x60 14W | 1384 | 1478 |
| Strip Sq+ 528 40x60 30W | 2454 | 2621 |
| Strip Sq+ 528 RGBW | 1108 | 1108 |
| Strip Sq+ 528 TW | 1142 | 1142 |

| Lumen Output | 3K | 4K |
|-------------------------|------|------|
| Strip Sq+ 780 A/M 21W | 2001 | 2136 |
| Strip Sq+ 780 A/M 43W | 3769 | 4025 |
| Strip Sq+ 780 C/I 21W | 2075 | 2216 |
| Strip Sq+ 780 C/I 43W | 3909 | 4174 |
| Strip Sq+ 780 15x45 21W | 2015 | 2152 |
| Strip Sq+ 780 15x45 43W | 3796 | 4054 |
| Strip Sq+ 780 40x60 21W | 2015 | 2151 |
| Strip Sq+ 780 40x60 43W | 3795 | 4053 |
| Strip Sq+ 780 RGBW | 1520 | 1520 |
| Strip Sq+ 780 TW | 1655 | 1655 |

| Lumen Output | 3K | 4K |
|--------------------------|------|------|
| Strip Sq+ 1030 A/M 27W | 2660 | 2841 |
| Strip Sq+ 1030 A/M 55W | 4740 | 5061 |
| Strip Sq+ 1030 C/I 27W | 2759 | 2946 |
| Strip Sq+ 1030 C/I 55W | 4916 | 5249 |
| Strip Sq+ 1030 15x45 27W | 2680 | 2862 |
| Strip Sq+ 1030 15x45 55W | 4774 | 5099 |
| Strip Sq+ 1030 40x60 27W | 2679 | 2861 |
| Strip Sq+ 1030 40x60 55W | 4773 | 5097 |
| Strip Sq+ 1030 RGBW | 2103 | 2103 |
| Strip Sq+ 1030 TW | 2252 | 2252 |

| Lumen Output | 3K | 4K |
|--------------------------|------|------|
| Strip Sq+ 1284 A/M 33W | 3324 | 3549 |
| Strip Sq+ 1284 A/M 67W | 6086 | 6499 |
| Strip Sq+ 1284 C/I 33W | 3447 | 3861 |
| Strip Sq+ 1284 C/I 67W | 6312 | 6741 |
| Strip Sq+ 1284 15x45 33W | 3348 | 3576 |
| Strip Sq+ 1284 15x45 67W | 6131 | 6547 |
| Strip Sq+ 1284 40x60 33W | 3347 | 3574 |
| Strip Sq+ 1284 40x60 67W | 6129 | 6545 |
| Strip Sq+ 1284 RGBW | 2545 | 2545 |
| Strip Sq+ 1284 TW | 2867 | 2867 |