

SENTINALL™

S511L SERIES (2000)

PRODUCT FEATURES:

- » Surface wall mount – nominal 5"Wx11"H
- » ADA Compliant



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

LENS: UV-stabilized, high impact, virgin injection molded polycarbonate.

HOUSING: 18-gauge CRS, provided with four-point mounting holes, one wireway knockout, and four conduit knockouts. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours. See Options marine grade aluminum housing (AL).

REFLECTOR: Full reflector/wire cover (92% reflectivity).

GASKET: Die-cut closed cell neoprene gasket seals lens to housing and housing to mounting surface.

HARDWARE: One stainless steel Torx® T-20 with center pin fastener secures lens to housing.

ELECTRICAL: Available in 3500K, 4000K, and 5000K color temperatures, 80 CRI. 120-277VAC or 347VAC, 50/60Hz electrical input with high power factor electronic, constant-current driver (>.90 PF). Standard 0-10V dimming with 1-100% range; maximum driver source of 200 µA.

INSTALLATION: Standard four-point mounting required for Peace of Mind Guarantee®.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric data, please go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty. Peace of Mind Guarantee against breakage.

LISTINGS: Luminaire is certified to UL Standards by Intertek Testing Laboratory for Wet Location. ADA compliant.



ORDERING INFORMATION (Ex: S511L-P-DB-16L40K-DV)

Model	Lens Type	Finish	Lamp Type	Voltage	Options
S511L	P				
	Lens Type	Finish	Lamp Type	Voltage	Options
	P Pearlescent	MW Matte White DB Dark Bronze	8L35K 8 Watt 3500K LED 8L40K 8 Watt 4000K LED 8L50K 8 Watt 5000K LED 16L35K 16 Watt 3500K LED 16L40K 16 Watt 4000K LED 16L50K 16 Watt 5000K LED	347 347 Volts DV 120-277 Volts	AL Marine Grade Aluminum Housing



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.

A brand of **legrand**

S511L-111122

SENTINALL™


S511L SERIES (2000)

PERFORMANCE

Lamp Type	Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
	@ 25°C	Efficacy (lm/W)			
8L35K	1154	84	14	75	85,000
8L40K	1154	84	14	75	85,000
8L50K	1258	92	14	75	85,000
16L35K	1628	83	20	150	65,000
16L40K	1628	83	20	150	65,000
16L50K	1775	90	20	150	65,000

Information subject to change. Visit www.kenall.com for IES files and additional information.


Model: S511L-P-MW-16L40K-DV



Max Candela = 1192 Located At Horizontal Angle = 0, Vertical Angle = 87.5

1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (87.5) (Through Max. Cd.)

DIMENSIONAL DATA

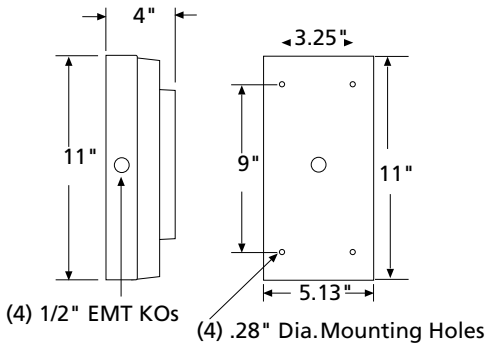

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.

A brand of **legrand**