GOLD CUP LG LED

Architectural Outdoor






FEATURES

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- CSA Listed Wet Location For Wall Mounting

PROJECT: TYPE: PO#:

COMMENTS:

- Emergency Battery Available
- Fully Gasketed
- LED Light Fixture
- L70 Life Time For 50,000hr
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Ribbed Borosilicate Glass Diffuser

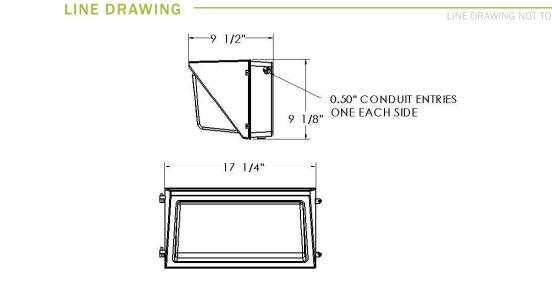





Bronze Textured







TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 1

QTY:

GOLD CUP LG LED

Architectural Outdoor

SI 🕇 📼

PROJECT: TYPE:

QTY:

PO#: COMMENTS:

Fixture Core			
PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
· ·	Not Applicable	L48.0 - 48W	ZE- 0-10V
			LT - LE/TE
ORDER INFO			

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120 - 277V	BZ - Textured Bronze	30К - 3000К Color Temp 40К - 4000К Color Temp 50К - 5000К Color Temp	SDIM - Step-Dimmable Driver (Dimmable to 25% and 50%)PCL120 - Photocell 120VPCL277 - Photocell 277VLXS - Lexan Lens ShieldWGD - Steel Wire GuardTP - Tamper-Proof Screw SetF - FusedEBC - 6W Integral EM Battery (-20°C) AvailableEBW - 5.1W Emergency Battery Available
ORDER INFO			SPD – Surge Protection Device

PROD	SOURCE	40K SPECS	50K SPECS		
GPL	L48.0	 80 CRI Typ. 40K - 4000K Color Temp 5368 LED Source Lumens 111.8 LED Source Lumans Per Watt 	 80 CRI Typ. 50K - 5000K Color Temp 5650 LED Source Lumens 117.7 LED Source Lumans Per Watt 		

REPLACEMENT PART	PART NO	NOTES
Ribbed Borosilicate Glass Diffuser	37129	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.