



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000hrs. L80 with 90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED ORBIT+ TYPE — SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

- | | | | | | |
|---|---|--|---|---|--|
| <p>TYPE</p> <ul style="list-style-type: none"> <input type="checkbox"/> S - Shape | <p>SIZE</p> <ul style="list-style-type: none"> <input type="checkbox"/> 3 Feet <input type="checkbox"/> 4 Feet <input type="checkbox"/> 6 Feet <input type="checkbox"/> 8 Feet | <p>SOURCE</p> <ul style="list-style-type: none"> <input type="checkbox"/> 5W/FT LED <input type="checkbox"/> 7W/FT LED <input type="checkbox"/> 10W/FT LED | <p>RADIANCE</p> <ul style="list-style-type: none"> <input type="checkbox"/> DD - Direct (100% Downward) <input type="checkbox"/> SD - Side Distribution (100% Sideways) <p><small>*Light Distribution.</small></p> | <p>VOLTAGE</p> <ul style="list-style-type: none"> <input type="checkbox"/> 120V <input type="checkbox"/> 277V <input type="checkbox"/> 347V* <p><small>*Not available for all configurations.</small></p> | <p>DRIVER</p> <ul style="list-style-type: none"> <input type="checkbox"/> ST - Standard <input type="checkbox"/> DL - 0-10V Dimming (1%) <input type="checkbox"/> DA - DALI <input type="checkbox"/> <input type="text"/>* <p><small>* Please specify dimming method.</small></p> |
|---|---|--|---|---|--|

- | | | | | |
|--|---|---|---|---|
| <p>MOUNTING</p> <ul style="list-style-type: none"> <input type="checkbox"/> S4-Suspension 4Feet** <input type="checkbox"/> S6-Suspension 6Feet** <input type="checkbox"/> S <input type="text"/> Feet* <p><small>*Please specify required Length.
**Remote Driver.</small></p> | <p>LENS</p> <ul style="list-style-type: none"> <input type="checkbox"/> OP - Opal | <p>FINISH</p> <ul style="list-style-type: none"> <input type="checkbox"/> WH - White <input type="checkbox"/> BK - Black <input type="checkbox"/> GR - Grey <input type="checkbox"/> CF - Custom <input type="text"/> RAL# | <p>CCT</p> <ul style="list-style-type: none"> <input type="checkbox"/> 30K - 3000Kelvin <input type="checkbox"/> 35K - 3500Kelvin <input type="checkbox"/> 40K - 4000Kelvin <p><small>*Other options are available.</small></p> | <p>OPTIONS</p> <ul style="list-style-type: none"> <input type="checkbox"/> 90CRI <input type="checkbox"/> CB - Casambi BT <p><small>*Combination example (90CRI/CB).</small></p> |
|--|---|---|---|---|


LUMEN OUTPUT W/FT:

Watts	30K	35K	40K
5W	440 lm	450 lm	460 lm
7W	618 lm	630 lm	642 lm
10W	882 lm	900 lm	918 lm


Project:

Type:

PROFILE:

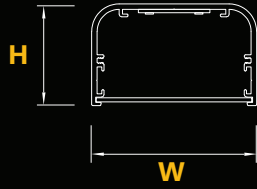


3 Feet and 4 Feet

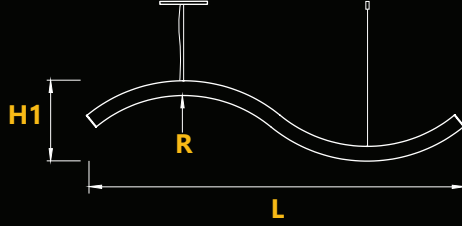


DIMENSIONS:

Profile	Size	Length	Height - H1	Radius - R
Width - W	3 Feet	37.03 Inch	7.87 Inch	15 Inch
	4 Feet	46.75 Inch	6.00 Inch	30 Inch
Height - H	6 Feet	73.00 Inch	7.87 Inch	15 Inch
	8 Feet	92.75 Inch	6.00 Inch	30 Inch


6 Feet and 8 Feet

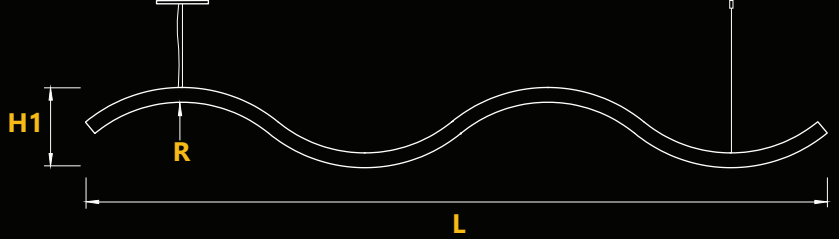


SIZES AND CONFIGURATIONS:




3 Feet




4 Feet




6 Feet

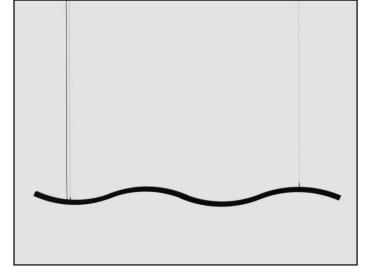


8 Feet

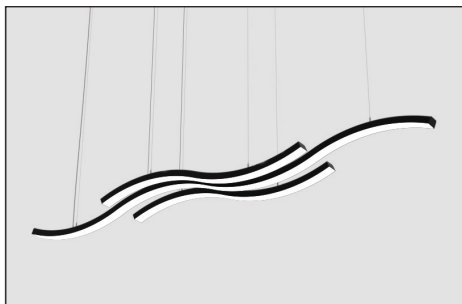

4 Feet and 8 Feet - Combination

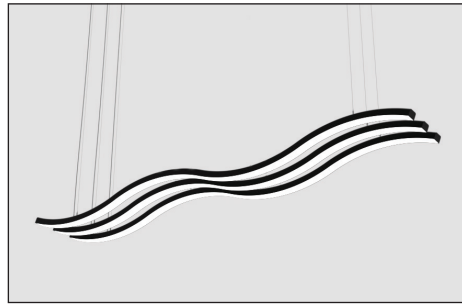

8 Feet - Combination

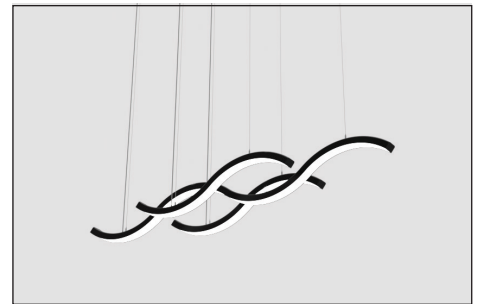

3 Feet and 6 Feet - Combination