

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency low glare integral reflector comes in following beam angles: Spot 15°, Narrow Flood 35° and Flood 55°.
- ✓ Adjustable trim assembly can be tilted up to 30° for wall wash applications.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed non insulated ceilings and dry locations.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED SD+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- 2x-Double

SOURCE

- 15W LED
- 20W LED
- 25W LED

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming
- DT - TRIAC
- *

* Please specify dimming method.

MOUNTING

- RT -Retrofit
- NC- New Const. Plate

REFLECTOR

- SP - Spot
- NF - Narrow Flood
- FL - Flood

LOUVER

- MW - Matt White
- MB - Matt Black
- MS - Matt Silver

TRIM

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- 90 CRI


*Leave Empty.

DIMENSIONS:

Size	Height	Width	Length	Cut Out
Double	4.88"	4.13"	7.67"	7.30"x3.75"

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1425 lm	1455 lm	1485 lm
20W	1900 lm	1940 lm	1980 lm
25W	2375 lm	2425 lm	2475 lm

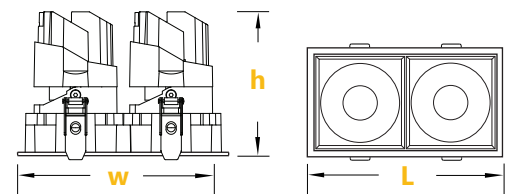

Project:

Type: