
**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: 11" LED Modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with regular 50°/16UGR, flood 80°/19UGR or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +85CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

**SPECIFICATION:**

**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

**TYPE**

- DO - Dark Optic

**SIZE**

\_\_\_\_\_ Feet\*

\* 1Foot increment only.

**SOURCE**

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED

**RADIANCE**

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)\*\*

\*Light Distribution.  
 \*\*Suspended Configuration only.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*
- EC - Emergency Circuit

\* Please specify dimming method (Phase).

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

\*Please specify required Length.

**REFLECTOR**

- WH - White
- BK - Black
- SL - Silver

**LENS**

- RB - Regular 50°
- FB - Flood 80°
- AB - Asymmetric

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

**OPTIONS**

- No Options\*
- 90 CRI
- DC - Dual Circuit\*\*

\*Leave Empty.  
 \*\*Down /Up Control separately.


**LUMEN OUTPUT W/Ft:**

| Watts | 30K    | 35K     | 40K     |
|-------|--------|---------|---------|
| 5W    | 610 lm | 625 lm  | 640 lm  |
| 7W    | 855 lm | 875 lm  | 895 lm  |
| 10W   | 1225lm | 1250 lm | 1275 lm |

Project:

Type:

## SIZE:

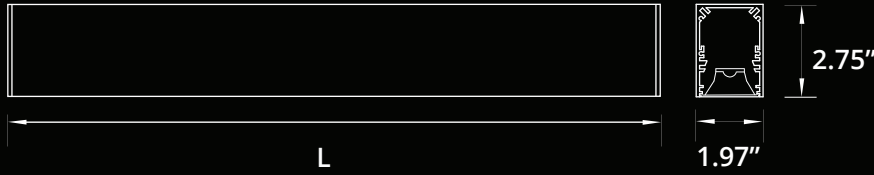

| Size   | L (LENGTH)  | LED Strips |
|--------|-------------|------------|
| 1 Feet | 12.125 Inch | 1x11"      |
| 2 Feet | 23.125 Inch | 2x11"      |
| 3 Feet | 34.125 Inch | 3x11"      |
| 4 Feet | 45.125 Inch | 4x11"      |
| 5 Feet | 56.125 Inch | 5x11"      |
| 6 Feet | 67.125 Inch | 6x11"      |
| 7 Feet | 78.125 Inch | 7x11"      |
| 8 Feet | 89.125 Inch | 8x11"      |

## RADIANCE:


### DIRECT DISTRIBUTION




### UNEVEN DISTRIBUTION




## MOUNTING:

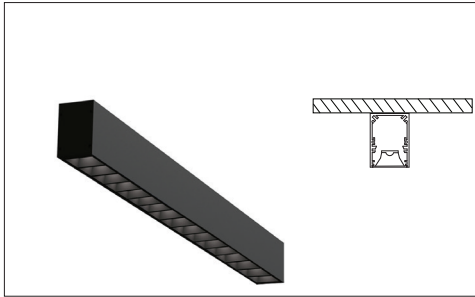

SURFACE MOUNT

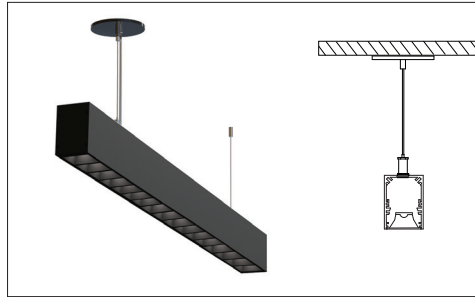


SUSPENDED

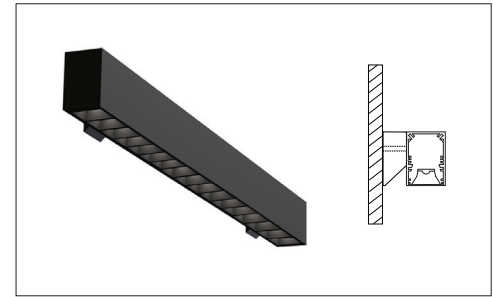


WALL MOUNT


## BEAMS:



REGULAR BEAM



FLOOD BEAM



ASYMMETRIC BEAM