



## FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**


## SPECIFICATION:

**Sonic CUBIC+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

- |   |   |  |   |   |
|---|---|--|---|---|
| <b>TYPE</b><br><input type="checkbox"/> BS - Box  | <b>HEIGHT</b><br><input type="checkbox"/> 12 Inch<br><input type="checkbox"/> 16 Inch<br><input type="checkbox"/> 24 Inch | <b>SOURCE</b><br><input type="checkbox"/> 15W LED<br><input type="checkbox"/> 20W LED<br><input type="checkbox"/> 25W LED  | <b>VOLTAGE</b><br><input type="checkbox"/> 120V<br><input type="checkbox"/> 277V  | <b>DRIVER</b><br><input type="checkbox"/> ST - Standard<br><input type="checkbox"/> DL - 0-10V Dimming<br><input type="checkbox"/> DT - TRIAC<br><input type="checkbox"/> <input type="text"/> *<br><small>* Please specify dimming method (ELV).</small> |
| <b>MOUNTING</b><br><input type="checkbox"/> S4-Suspension 4Feet<br><input type="checkbox"/> S6-Suspension 6Feet<br><input type="checkbox"/> S <input type="text"/> Feet*<br><small>*Please specify required Length.</small> | <b>LOUVER</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black                               | <b>ED CUBIC FINISH</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> GR - Grey*<br><small>*Supply with White Cord &amp; Canopy</small> | <b>CCT</b><br><input type="checkbox"/> 30K - 3000Kelvin<br><input type="checkbox"/> 35K - 3500Kelvin<br><input type="checkbox"/> 40K - 4000Kelvin<br><small>*Other options are available.</small> |   |

## ACOUSTIC FINISH\*

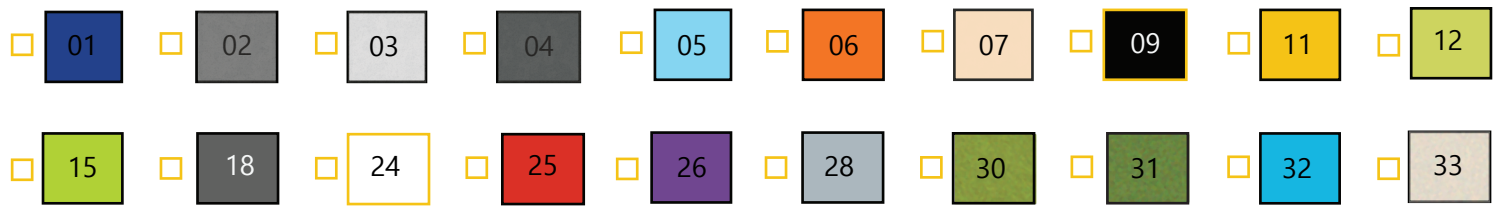

\* Please specify Sides, for example (09/15)

## LUMEN OUTPUT:


Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

Project:

Type:

SIZE:

L - Length	W - Width	H - Height
12.00 Inch	12.00 Inch	12.00 Inch = 11.75 Inch
16.00 Inch	16.00 Inch	16.00 Inch = 15.75 Inch
24.00 Inch	24.00 Inch	24.00 Inch = 23.75 Inch

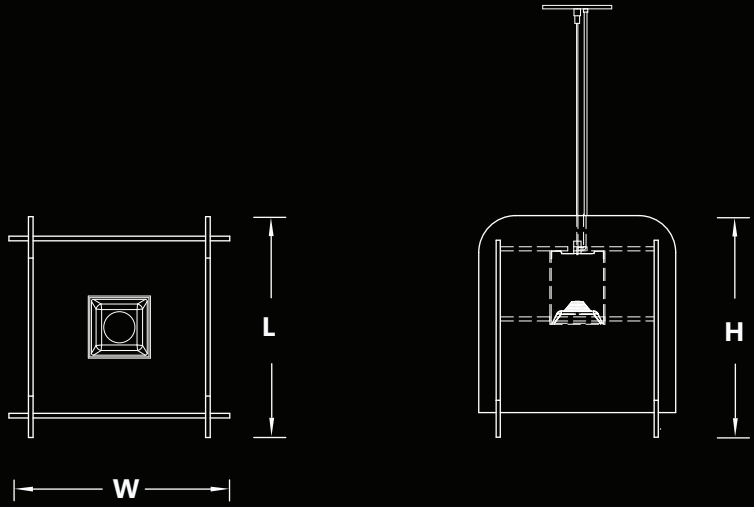

FINISHES:



(06/26)




(25/01)



(09/15)




(02/01)

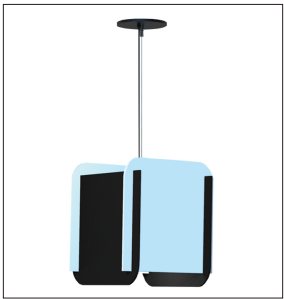

(05/09)



(06/12)

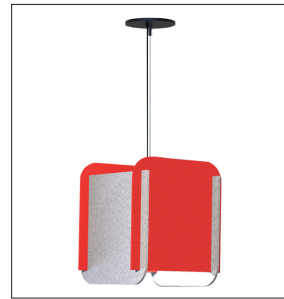

(25/03)



(01/12)