Sonic TUBE+



FEATURES:

- Architectural sound absorbing Eco Felt Acoustic panel.
- Made from recyclable plastic material available in different thicknesses.
- Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- Light source: COB LED.
- High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- Circular internal louver is available in a wide range of finishes.
- Aluminum body of the luminaire comes with built-in-driver.
- LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards. reinventlight

SPECIFICATION:				
Sonic TUBE+	HEIGHT		DRIVER MOUNTING LOUVER TUBE F	ACOSUTIC FINISH CCT
TYPE ☐ CS - Cylinder	HEIGHT 12 Inch 16 Inch 24 Inch	SOURCE 15W LED 20W LED 25W LED	VOLTAGE ☐ 120V ☐ 277V	DRIVER ST - Standard DL - 0-10V Dimming DT - TRIAC * Please specify dimming method (ELV).
MOUNTING S4-Suspension 4Feet S6-Suspension 6Feet S Feet* *Please specify required Length.		LOUVER ☐ WH - White ☐ BK - Black	ED TUBE FINISH WH - White BK - Black GR - Grey* *Supply with White Cord & Canopy	30K - 3000Kelvin 35K - 3500Kelvin 40K - 4000Kelvin *Other options are available.
ACOUSTIC FINISH*				
□ 01 □ 02	03	□ 04 □ 05 □	06 07 09	□ 11 □ 12
15 18	24	□ 25 □ 26 □ □ 26 □ □ □ □ □ □ □ □ □ □ □ □ □ □	28 🗆 30 🗆 31	32 🗆 33
* Please specify Acoustic Trim & Bottom Layer, for example (02/15)				
LUMEN OUTPUT			Project:	

905-830-0339 / 1-800-667-9281

1950 lm

2400 lm

1430 lm | 1460 lm

1990 lm

2450 lm

15W

20W

25W

1400 lm

1910 lm


2350 lm

info@edisonlighting.ca

Type:

www.edisonlighting.ca



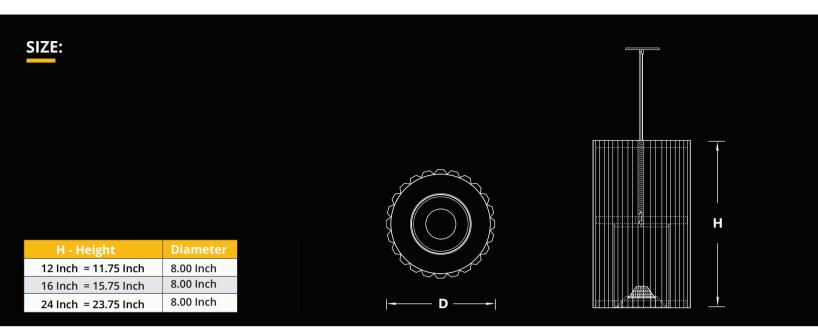

FINISHES:

















905-830-0339 / 1-800-667-9281



info@edisonlighting.ca



www.edisonlighting.ca