



## FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:

**Sonic TUBE+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### TYPE

- LS - Layered Shade

### HEIGHT

- 12 Inch
- 16 Inch

### SOURCE

- 15W LED
- 20W LED
- 25W LED

### VOLTAGE

- 120V
- 277V

### DRIVER

- ST - Standard
- DL - 0-10V Dimming
- DT - TRIAC
- \*

\* Please specify dimming method (ELV).

### MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*

\*Please specify required Length.

### LOUVER

- WH - White
- BK - Black

### ED TUBE FINISH

- WH - White
- BK - Black
- GR - Grey\*

\*Supply with White Cord & Canopy

### CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

\*Other options are available.

## ACOUSTIC FINISH\*

01  02  03  04  05  06  07  09  11  12  
 15  18  24  25  26  28  30  31  32  33

\* Please specify Acoustic Layers & Bottom Plate finish, for example (06/04)

## LUMEN OUTPUT:



Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

Project:

Type:

SIZE:

H - Height	Diameter
12 Inch = 11.75 Inch	16.00 Inch
16 Inch = 15.75 Inch	20.00 Inch

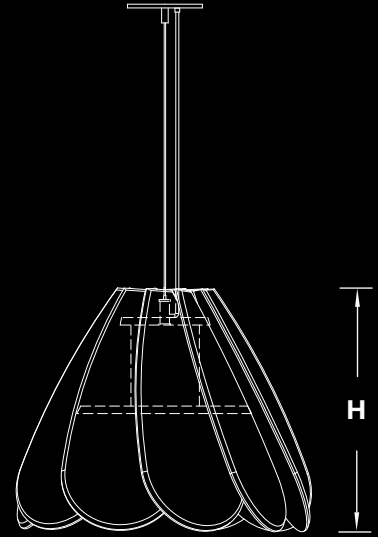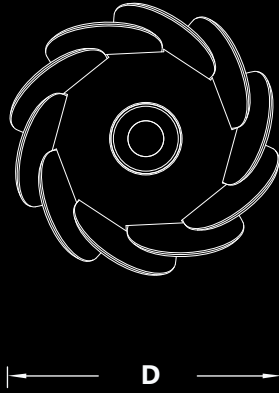

FINISHES:



(01)



(11)




(26)




(25)



(06)



(32)



(15)



(09)