



FRAME LED LIGHT



PRODUCT DESCRIPTION

The Frame led light is designed with lightweight aluminum frame. Available in 2x2 and 2x4 sizes. Recessed form factor fits most T-grid systems. It is architectural recessed lighting solution that compatible for commercial and institutional environments, including office building, medical, health, educational, retail, hotel, airport, hospitality, etc.

FEATURE

- Slim frame design
- CCT selectable
- Available in 2x2 and 2x4 sizes

ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 120-347V, 50/60Hz
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

PERFORMANCE

CRI

80

CCT

3000K, 3500K, 4000K selectable

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature


-4-104°F (-20-40°C)

Certifications


- cULus listed
- Suitable for dry locations
- RoHs compliant

SPECIFICATION

2x2

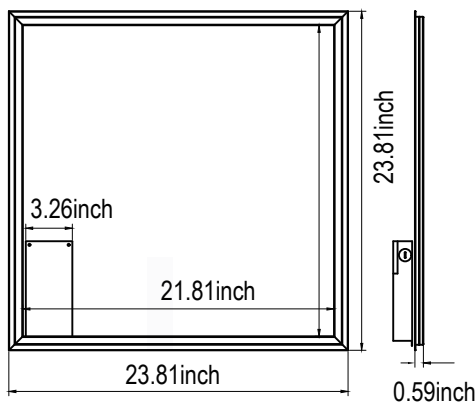

2x4

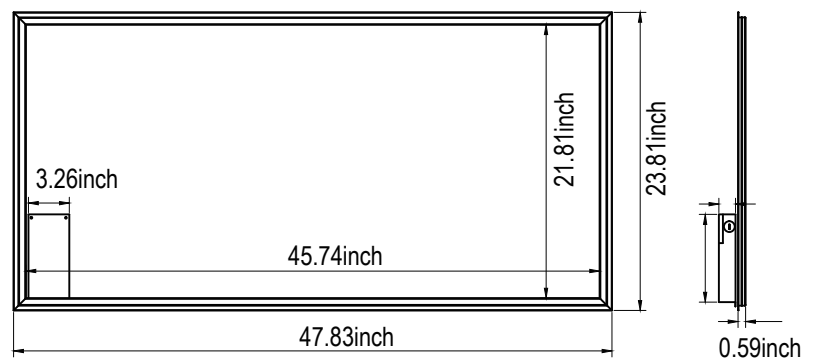

Ordering Information

Example: FRM22-40SP-SW8-PML

Series	Length	Watts	CCT	Voltage	Lens	Controls	Finish
FRM	22-2x2 FT	40SP - 27W/35W/40W Selectable ¹	SW - 3000K/3500K /4000K selectable ²	1- 120-277V 8- 120-347V	PML - Milky lens	Blank - None	Blank - White
	24 - 2x4 FT	54SP - 35W/45W/54W Selectable ¹					


Notice:

- 40W and 54W is default setting. Other wattages can be set by DIP switch.
- 4000K is default setting. Other CCT can be set by DIP switch.

* White finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Result may vary per actual order.

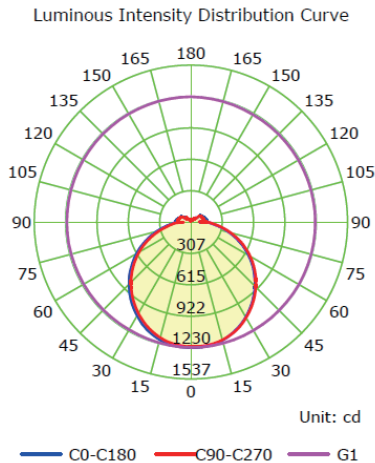

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	CCT	CRI	LPW
40	4000	0.33A	4000K	80	100
54	5400	0.45A	4000K	80	100



Warranty

Five year limited warranty.

Notes: Specifications subject to change without notice.