



# TRIA PENDANT LIGHT



## PRODUCT DESCRIPTION

The TRIA pendant comes in geometric triangle forms. Available in multiple sizes to fit the scale, proportions and light output requirements of the project. Optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

## FEATURE

- Geometric triangle forms
- Available in standard light and acoustic w/light
- 4 sizes to choose
- 35 acoustic felt colors available

## ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

## PERFORMANCE

CRI

90

CCT

3000K, 3500K, 4000K

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours


Working Temperature

-4-104°F (-20-40°C)

Certifications

- cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0
- Suitable for damp locations
- RoHs compliant

## DIMENSION

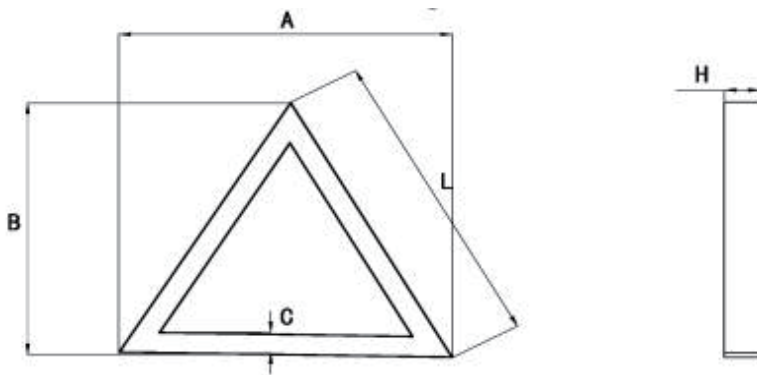

Wattage	A	B	C	L	H
25W	16.4"(416mm)	14.2"(360mm)	1.97"(50mm)	16.36"(415mm)	3.0"(75mm)
40W	20.5"(520mm)	17.7"(450mm)	1.97"(50mm)	20.45"(520mm)	3.0"(75mm)
90W	30.7"(780mm)	26.6"(675mm)	1.97"(50mm)	30.7"(780mm)	3.0"(75mm)
180W	40.9"(1038mm)	35.4"(900mm)	1.97"(50mm)	40.9"(1038mm)	3.0"(75mm)

## Ordering Information

**Example:** TRIA - / - 25 - 40 - 90 - 1 - ACPMK - / - WH - NSAC-021 130

1      2      3      4      5      6      7      8      9      10

### 1. Series

TRIA

### 2. Acoustic Configuration

**Blank**- Light without Acoustic       **LA** - Light with Acoustic

\* If choose Acoustic, please choose the acoustic color in the following list.

### 3. Watts/Diameter

25 - 25W                       40 - 40W  
 90 - 90W                       180 - 180W

### 4. CCT

30 - 3000K       40 - 4000K       50 - 5000K

### 5. CRI

90 - 90Ra

### 6. Voltage

1 - 120-277V

### 7. Installation

**ACPMK** - Aircraft Cable  
 Pendant Mount Kits\*

### 8. Controls


**Blank** - None

### 9. Frame Finish

**WH** - White

\* White finish frame is standard. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

### 10. Acoustic Color

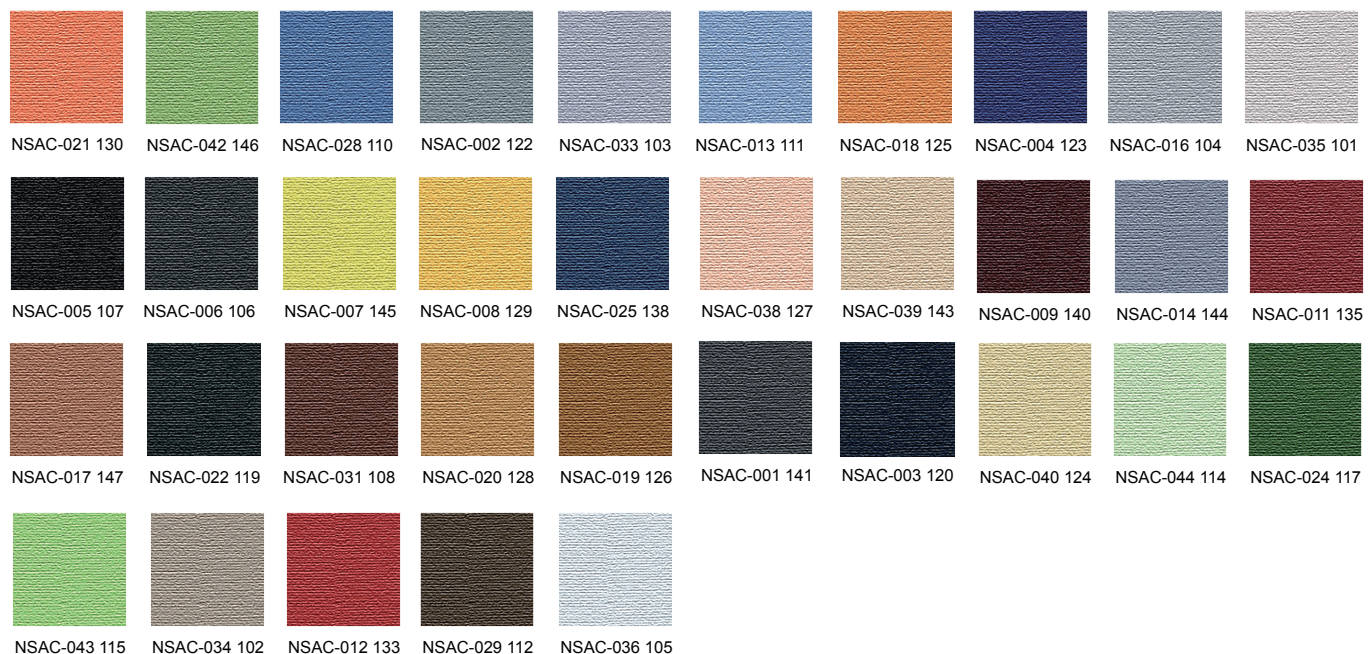

\* The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured.

Watts	Lumen Output	AC Input 120V	CCT	LPW
25	<b>2500</b>	0.21A	3000K	100
40	<b>4000</b>	0.33A	3000K	100
90	<b>9000</b>	0.75A	3000K	100
180	<b>18000</b>	1.50A	3000K	100

## Warranty

Five year limited warranty.

Specifications subject to change without notice.