

WINGSUIT

The Acoustic Light



PRODUCT DESCRIPTION

The Wingsuit Acoustic Light is a high-performing, sound-absorbing LED pendant luminaire with a wing appearance. The acoustic light is made up of a sound absorbing polyester fiber materials. It is a new materials that integrate sound absorbing, heat insulation and decorative effects. Deep anti-glare cup optic design is for better glare control. Direct and indirect distributions.

FEATURE


- Sound absorbing polyester fiber
- Deep anti-glare cup optics
- Direct and indirect distribution
- Soft side distribution

ELECTRICAL SYSTEM

- Input Voltage: 120-347V, 50/60Hz
- 0-10V Dimming optional
- Minimum Ambient -20°C, Maximum Ambient is 40°C
Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

Net Weight: 7.72 lbs / 3.5 kg

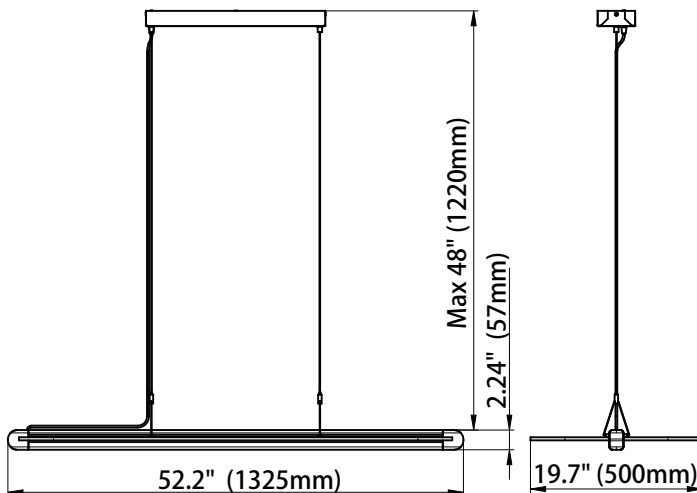

PERFORMANCE

CRI

80

CCT

3000K, 3500K, 4000K

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-104°F (-20-40°C)

Certifications


- cETLus conforms to UL Std. 1598
Cert. to CSA Std. C22.2 No.250.0
- Suitable for dry locations
- RoHs compliant

Ordering Information

Example: WINID65-40808-DG

Series	Distribution	Watts	- CCT	CRI	Voltage	Installation	- Controls	- Finish
WIN	ID- Direct and Indirect	65 - 65W	- 30 - 3000K 35 - 3500K 40 - 4000K	80 - 80Ra	8-120-347V	Blank -Pendant	- Blank-None	- DG-Dark Grey

Illumination Ratio



Direct and Indirect

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output Direct + Indirect	AC Input 120V	CCT	CRI
65	2300+2300	0.54A	4000K	80

Warranty

Five year limited warranty.

Specifications subject to change without notice.