# specter

SPSS MODULES
UNDROP LINE

bold lighting

UNDROP LINE

Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is avalable in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature.
The Undrop module offers a quietly recessed fixture configuration, flush with the face of the track. It comes with a wide range of lengths and optics, allowing the illumination of both horizontal or vertical planes, at different ceiling heights, ranging from a single level to a tall triple level atrium.

- Up to 3,700lm delivered output
- Available in various length from 3" to 36" sections
- Available in Low glare baffles and Opal lens
- Fixtures designed to mount in SPECTER track
- Available in 4 standard finishes: Black, white, silver and bronze

Notes: [1] Available dimming 0-10V and DALI

## STANDARD **FINISHES**

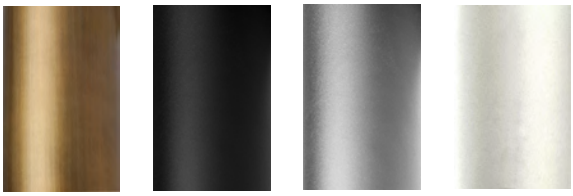

Z B S W

## Code example: **SPSF-O**03W-W-L827-2

## **DELIVERED LUMEN** OUTPUT

| Length | Watts | CRI +80 | | | | CRI +90 | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | 2700K | 3000K | 3500K | 4000K | 2700K | 3000K | 3500K | 4000K |
| 3" | 4W | 248lm | 275lm | 303lm | 333lm | 200lm | 222lm | 244lm | 269lm |
| 6" | 7W | 544lm | 604lm | 665lm | 731lm | 439lm | 487lm | 536lm | 590lm |
| 12" | 13W | 996lm | 1107lm | 1218lm | 1340lm | 804lm | 893lm | 982lm | 1080lm |
| 24" | 26W | 1916lm | 2129lm | 2342lm | 2576lm | 1545lm | 1717lm | 1888lm | 2077lm |
| 36" | 39W | 2847lm | 3161lm | 3477lm | 3825lm | 2294lm | 2549lm | 2804lm | 3084lm |

| Series | Length | | Body Finish | | Baffle Finish | | Beam Angle | | CRI | | Color Temp | | Circuit | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **SPSF-O** | **03** | 3" | **W** | White | **W** | White | **L** | 120° | **8** | +80 | **27** | 2700K | **1** | 1-Circuit |
| | **06** | 6" | **B** | Black | **B** | Black | | | **9** | +90 | **30** | 3000K | **2** | 2-Circuit |
| | **12** | 12" | **S** | Silver | **S** | Silver | | | | | **35** | 3500K | | |
| | **24** | 24" | **Z** | Bronze | **Z** | Bronze | | | | | **40** | 4000K | | |
| | **36** | 36" | **X** | Custom | **X** | Custom | | | | | | | | |

Bold Lighting
4710 Ecton Dr., Marietta, GA 30066, USA
info@boldlighting.us www.boldlighting.us
t: +1-678-903-4061

## Photometric data:
Type C Polar Curves

120° Beam Angle (Lambertian)




Max. 380 cd 1,000 lm

### UNDROP LINE 3

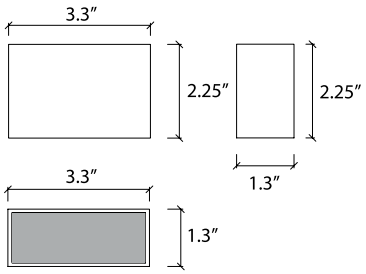


### UNDROP LINE 6

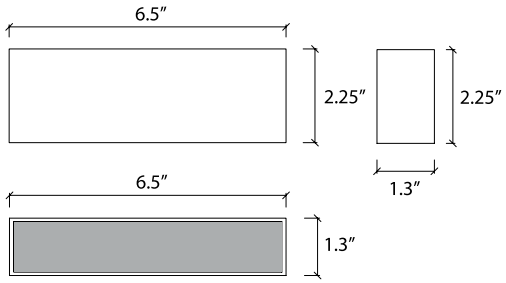


### UNDROP LINE 12

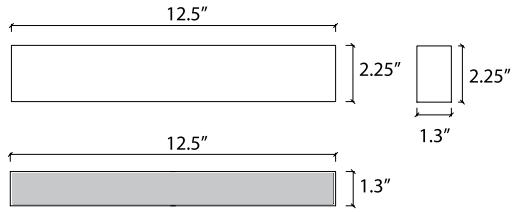


### UNDROP LINE 36 / 24

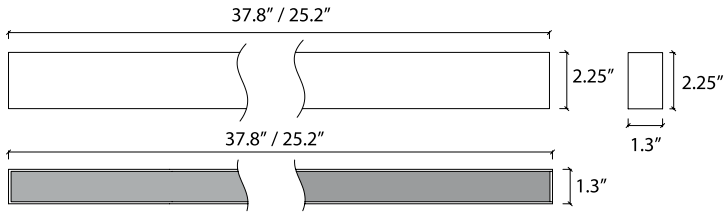


Bold Lighting
4710 Ecton Dr., Marietta, GA 30066, USA
info@boldlighting.us www.boldlighting.us
t: +1-678-903-4061