


LC2-HOR

Luminous Cylinder | Ø 2" | Horizontal


LUMOS
Architectural Lighting



MODERN SLIMLINE LUMINAIRE
WITH A SEAMLESS, VIBRANT GLOW

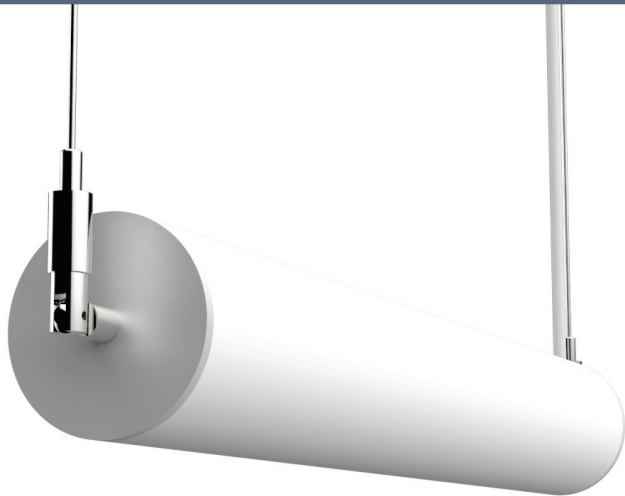

end cap (x2)

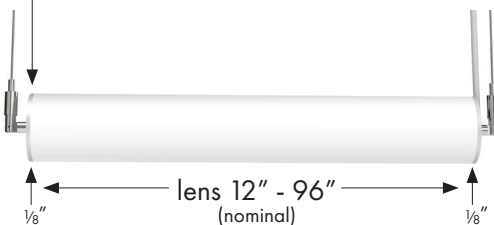

Features

- Diameter:** 2"
- Output:** 122 LPW
- Lens:** White acrylic, 12" to 96" (nominal)
- End Caps:** Formed aluminum
- Mounting:** Pendant
- Driver:** Inside canopy or remote
- Weight:** 2 lb/linear ft
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website

- Modern aesthetics
- Mount with angled suspension
- Minimalist design allows easy adaptability
- For vertical mounting options, see the LC2-VER spec sheet



LC2-HOR

Luminous Cylinder | Ø 2" | Horizontal

Project: _____ Type: _____ Date: _____

Order: _____

Example: LC2-HOR - 60 - SO - 930 - DIM - AC20-ASL - SCC - BBU

Order Guide



- 12
- 24
- 36
- 48
- 60
- 72
- 84
- 96

SO standard
840 lm/ft

MD modify lumens and watts
(5% increments up to 840 lm -
consult factory)

Static White

830 CRI >80 3000°K

835 CRI >80 3500°K

840 CRI >80 4000°K

930 CRI >90 3000°K

935 CRI >90 3500°K

940 CRI >90 4000°K

DIM 0-10 V/1%

DIM.1 0-10 V/.1%

TRC TRIAC/ ELV

DAL DALI

Drivers rated 120-277 VAC



Pendant

AC10 100" adjustable cable

AC15 150" adjustable cable

AC20 200" adjustable cable

Power-over-Cable (PoC)

AC-POC Power-over-Cable
with 100" adjustable
aircraft cable
(consult to discuss
output and submittals)

Powder Coat

WHT matte white

BLK matte black

ASL anodized silver

GRY matte gray
(RAL 7035)

RALX matte RAL color
X=code
(matte finish unless noted
otherwise - please specify)

CCL custom color
(provide chip)

Powder Coat

Standard	Canopy Color	Cord Color
WCC	white	white
BCC	black	black
SCC	silver	silver
MBC	white	silver
RAL		
RCW	RALX	white
RCB	RALX	black
RCS	RALX	silver
Custom		
CCW	CCL	white
CCB	CCL	black
CCS	CCL	silver

RMT remote driver

BBU remote battery backup
with remote driver

