
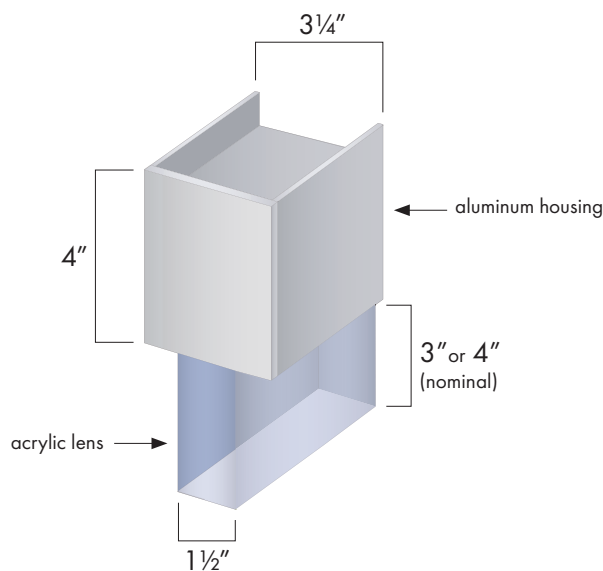


MODERN LINEAR FIXTURE WITH AN ILLUMINATED BLADE

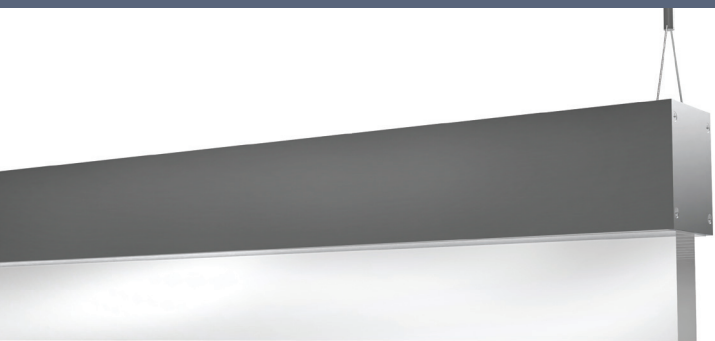

Features

- Length:** 24" to 96" (nominal)
- Output:** 86 LPW
- Housing:** Aluminum
- Lens:** Cast clear acrylic with frosted edges
- Mounting:** Pendant, surface, recessed, T-Bar
- Driver:** Integral, remote or in canopy
- Weight:** 6.75 lb/linear ft
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website

- Continuous rows available (1" gap between lenses)
- Lift and shift style blades/lens
- Engraving/wayfinding options available
- Power-over-Cable option
- RGB+W in standard lumen output range

Project: _____ Type: _____ Date: _____

Order: _____

Example: MOD - RM93 - 60 - MD10000LM - DIM - AC15-ASL - SCC - RMT

Order Guide

MOD CSM	RM93	Length (in.)	Blade	Output	LED	Driver	Mounting	Fixture Finish	Canopy Cord Finish	Options	Acoustic Options
------------	------	--------------	-------	--------	-----	--------	----------	----------------	----------------------	---------	------------------

Length (in.)	Blade	Lumen Output	LED	Driver	Mounting
24	2.7"	SO standard 506 lm/ft	Static White	DIM 0-10 V/1%	Pendant
36	3.7"	HO high 1013 lm/ft	830 CRI >80 3000°K	DIM.1 0-10 V/.1%	AC10 100" adjustable cable
48		MD modify lumens and watts (5% increments up to 1013 lm - consult factory)	835 CRI >80 3500°K	TRC TRIAC/ ELV	AC15 150" adjustable cable
60			840 CRI >80 4000°K	DAL DALI	AC20 200" adjustable cable
72			930 CRI >90 3000°K	DMX Digital Multiplex (consult factory)	Surface
84			935 CRI >90 3500°K	DIM, DIM.1, DAL, DMX drivers rated 120-277 VAC. TRC drivers rated 120 VAC.	SRF surface mounted
96			940 CRI >90 4000°K		Recessed
			Dynamic White		REC recessed, trim flange
			TW tunable white 2700-6500 °K		TBR t-bar, tie down brackets
			WD warm dim 2200-3500 °K		Power-over-Cable (PoC)
			Red, Green, Blue + White		POC Power-over-Cable with multi-cable center canopy (consult for submittals)
			RGBW30 RGB+W+3000°K		
			RGBW35 RGB+W+3500°K		
			RGBW40 RGB+W+4000°K		
			(consult for TW, WD & RGBW)		

Fixture Finish	Canopy Cord Finish	Options	Acoustic Options
----------------	----------------------	---------	------------------

<p>Powder Coat</p> <p>WHT matte white</p> <p>BLK matte black</p> <p>ASL anodized silver</p> <p>GRY matte gray (RAL 7035)</p> <p>RALX matte RAL color X=code (specify)</p> <p>CCL custom color (provide chip)</p> <p>Wood Grain</p> <p>WG1 ash</p> <p>WG2 teak</p> <p>WG3 walnut</p> <p>WG4 zebrawood</p> <p>Skin</p> <p>CFS carbon fiber</p>	<p>Powder Coat</p> <table border="1"> <thead> <tr> <th>Standard</th> <th>Canopy Color</th> <th>Cord Color</th> </tr> </thead> <tbody> <tr> <td>WCC</td> <td>white</td> <td>white</td> </tr> <tr> <td>BCC</td> <td>black</td> <td>black</td> </tr> <tr> <td>SCC</td> <td>silver</td> <td>silver</td> </tr> <tr> <td>MBC</td> <td>white</td> <td>silver</td> </tr> <tr> <td>RAL</td> <td></td> <td></td> </tr> <tr> <td>RCW</td> <td>RALX</td> <td>white</td> </tr> <tr> <td>RCB</td> <td>RALX</td> <td>black</td> </tr> <tr> <td>RCS</td> <td>RALX</td> <td>silver</td> </tr> <tr> <td>Custom</td> <td></td> <td></td> </tr> <tr> <td>CCW</td> <td>CCL</td> <td>white</td> </tr> <tr> <td>CCB</td> <td>CCL</td> <td>black</td> </tr> <tr> <td>CCS</td> <td>CCL</td> <td>silver</td> </tr> </tbody> </table>	Standard	Canopy Color	Cord Color	WCC	white	white	BCC	black	black	SCC	silver	silver	MBC	white	silver	RAL			RCW	RALX	white	RCB	RALX	black	RCS	RALX	silver	Custom			CCW	CCL	white	CCB	CCL	black	CCS	CCL	silver	<p>UPL-1C uplight, 1 circuit</p> <p>UPL-2C uplight, 2 circuit</p> <p>ENGRV laser engraving</p> <p>RMT remote driver</p> <p>BBU remote battery back up with remote driver</p> <p>CNTRW continuous rows Example: RM93-1/96 -1/60 -1/60 -1/96</p>	<p>Skin</p> <p>FSL light gray</p> <p>FSD dark gray</p> <p>FSB blue</p> <p>FSG green</p> <p>FSY yellow</p> <p>FSR red</p>
Standard	Canopy Color	Cord Color																																								
WCC	white	white																																								
BCC	black	black																																								
SCC	silver	silver																																								
MBC	white	silver																																								
RAL																																										
RCW	RALX	white																																								
RCB	RALX	black																																								
RCS	RALX	silver																																								
Custom																																										
CCW	CCL	white																																								
CCB	CCL	black																																								
CCS	CCL	silver																																								
<p>Modify & Customize *</p> <p>MOD indicates a modification to standard spec attributes</p> <p>CSM indicates a customized feature</p> <p>standard: RM93 - 96 - SO - 935 - DIM - SPC - BLK - BCC - FPD</p> <p>modified Lm: MOD - RM93 - 60 - MD10000LM - DIM - MCC - ASL - SCC - RMT</p> <p>custom length: CSM - RM93 - 42/67/95 - SO - 840 - DIM - MRC - WHT - WCC</p> <p>* MOD/CSM placed at the beginning of an order sequence</p>																																										

