


MODERN RING WITH DIRECT,
GLARE-FREE ILLUMINATION

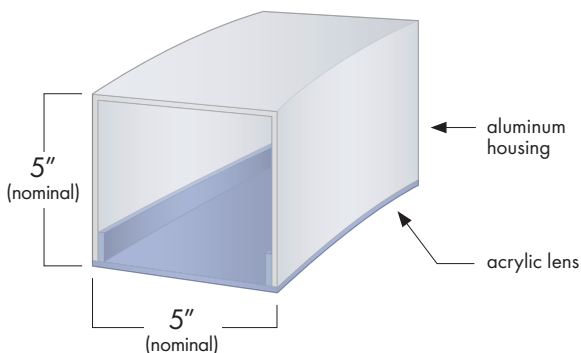

Features

- Diameter:** 24" to 240" (nominal)
- Efficacy:** 82 LPW
- Housing:** Formed aluminum
- Lens:** Transmissive, frosted acrylic
- Mounting:** Pendant or surface
- Driver:** Integral or remote
- Weight:** 5.5 lb/ft (based on \varnothing)
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website

- Power-over-Cable option
- Mounting options for multi-ring clusters
- RGBW in standard lumen output range
- Acoustic options available

Project: _____ Type: _____ Date: _____

Order: _____

Example: RP-DN - 60 - SO - 935 - DIM - SPC - BLK - BCC - FPB

Order Guide



Ø (in.)	Lumen Output	LED	Driver	Mounting
24	SO standard 485 lm/linear ft	Static White	DIM 0-10 V/1%	Pendant
36		830 CRI >80 3000°K	DIM.1 0-10 V/.1%	SPC single point canopies
48	HO high 970 lm/linear ft	835 CRI >80 3500°K	TRC TRIAC/ ELV	MCC multi-cable center canopy (consult for Ø > 96")
60		840 CRI >80 4000°K	DAL DALI	MRC multi-ring cluster (consult for submittals)
72	MD modify lumens and watts (consult factory)	930 CRI >90 3000°K	DMX Digital Multiplex (consult factory)	Power-over-Cable (PoC)
84		935 CRI >90 3500°K	Drivers rated 120-277 VAC	MCC-POC Power-over-Cable with multi-cable center canopy (consult for submittals)
96		940 CRI >90 4000°K		Surface
120	Example Calculation for a 48" High Output Ring: (4' x 3.14) x 970 = 12,183 total lumens	Dynamic White		SRF surface mount
144		TW tunable white 2700-6500°K		
168		WD warm dim 2200-3500°K		
192		Red, Green, Blue + White		
240		RGBW30 RGBW+3000°K RGBW35 RGBW+3500°K RGBW40 RGBW+4000°K (consult for TW, WD & RGBW)		

Fixture Finish	Canopy Cord Finish	Options	Acoustic Options
Powder Coat	Powder Coat	RMT remote driver	Panel*
WHT matte white	Standard	BBU remote battery backup with remote driver	FPL light gray
BLK matte black	Canopy Color		FPD dark gray
ASL anodized silver	Cord Color		FPB blue
GRY matte gray (RAL 7035)	WCC white white		FPG green
RALX matte RAL color X=code (specify)	BCC black black		FPY yellow
CCL custom color (provide chip)	SCC silver silver		FPR red
	MBC white silver		* max Ø = 144"
Wood Grain	RAL		Skin
WG1 ash	RCW RALX white		FSL light gray
WG2 teak	RCB RALX black		FSD dark gray
WG3 walnut	RCS RALX silver		FSB blue
WG4 zebrawood	Custom		FSG green
Skin	CCW CCL white		FSY yellow
CFS carbon fiber	CCB CCL black		FSR red
	CCS CCL silver		

Modify & Customize*

MOD indicates a modification to standard spec attributes
CSM indicates a customized feature

standard: RP-DN - 60 - SO - 935 - DIM - SPC - BLK - BCC - FPB
 modified Lm: **MOD** - RP-DN - 60 - **MD14000LM** - 940 - DIM - MCC - ASL - SCC - RMT
 custom ring Ø: **CSM** - RP-DN - **35/55/75** - SO - 840 - DIM - MRC - WHT - WCC

* **MOD/CSM** placed at the beginning of an order sequence