



RP-DN-OWL

Ring | Direct | Luminous Outer Wall

LUMOS
Architectural Lighting



A HIGH EFFICIENCY LUMINOUS RING
WITH SOFT, GLARE FREE ILLUMINATION

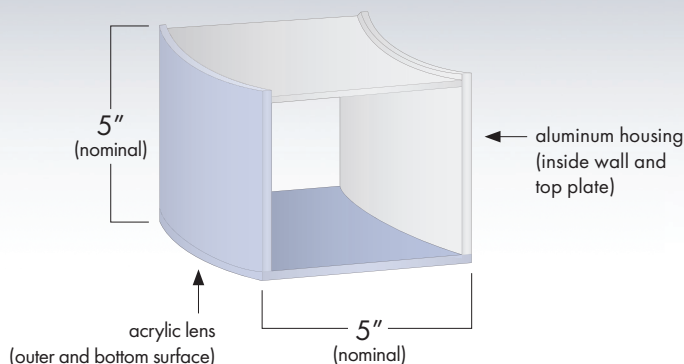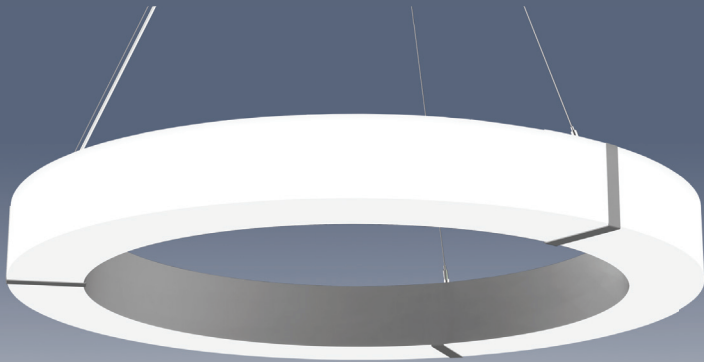

Features

- Diameter:** 24" to 144" (nominal)
- Output:** 109 LPW
- Housing:** Formed aluminum
- Lens:** Transmissive, frosted acrylic
- Mounting:** Pendant or surface
- Driver:** Remote, or in canopy
- Weight:** 5.25 lb/ft (based on \emptyset)
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report

- Rings up to 72" diameter ship in one piece
- Mounting option for multi-ring clusters
- Acoustic options available
- RGB+W in standard lumen output range



RP-DN-OWL

Ring | Direct | Luminous Outer Wall

Project: _____ Type: _____ Date: _____

Order: _____

Example: MOD - RP-DN-OWL - 60 - MD10000LM - 840 - DIM - MCC - ASL - SCC - RMT

Order Guide



Ø (in.)	Lumen Output	LED	Driver	Mounting				
24	SO standard 648 lm/linear ft	Static White	DIM 0-10 V/1%	Pendant				
36								
48	HO high 1435 lm/linear ft	830 CRI >80 3000°K	DIM.1 0-10 V/.1%	SPC single point canopies				
60								
72	MD modify lumens and watts (consult factory)	835 CRI >80 3500°K	TRC TRIAC/ ELV	MCC multi-cable center canopy (consult for Ø > 96")				
84								
84	Example Calculation for a 48" High Output Ring: (4' x 3.14) x 1435 = 18,024 total lumens	Dynamic White	DAL DALI	MRC multi-ring cluster (consult for submittals)				
96								
120								
144								
					TW tunable white 2700-6500 °K	DMX Digital Multiplex (consult factory)	Power-over-Cable (PoC)	
					WD warm dim 2200-3500 °K			
					Red, Green, Blue + White			MCC-POC Power-over-Cable with multi-cable center canopy (consult for submittals)
					RGBW30 RGB+W+3000°K			
					RGBW35 RGB+W+3500°K			
					RGBW40 RGB+W+4000°K			
	(consult for TW, WD & RGBW)	Surface						
			SRF surface mount (1" stand-off)					



Fixture Finish	Canopy Cord Finish	Options	Acoustic Options
Powder Coat	Powder Coat	RMT remote driver	Center Panel*
WHT matte white	Standard	BBU remote battery back up with remote driver	FPL light gray
BLK matte black	Canopy Color		FPD dark gray
ASL anodized silver	Cord Color		FPB blue
GRY matte gray (RAL 7035)	WCC white white		FPG green
RALX matte RAL color X=code (specify)	BCC black black		FPY yellow
CCL custom color (provide chip)	SCC silver silver		FPR red
	MBC white silver		* max Ø = 144"
Wood Grain*	RAL		** inner wall only
WG1 ash	RCW RALX white		
WG2 teak	RCB RALX black		
WG3 walnut	RCS RALX silver		
WG4 zebrawood	Custom		
Skin*	CCW CCL white		
CFS carbon fiber	CCB CCL black		
* consult factory	CCS CCL silver		

Modify & Customize*

MOD indicates a modification to standard spec attributes
CSM indicates a customized feature

standard: RP-DN-OWL - 60 - SO - 935 - DIM - SPC - BLK - BCC - FPB
 modified Lm: **MOD** - RP-DN-OWL - 60 - **MD10000LM** - 840 - DIM - MCC - ASL - SCC - RMT
 custom ring Ø: **CSM** - RP-DN-OWL - **35/55/75** - SO - 840 - DIM - MRC - WHT - WCC

* **MOD/CSM** placed at the beginning of an order sequence

