




A MINI RING WITH GLARE-FREE
INNER BRILLIANCE

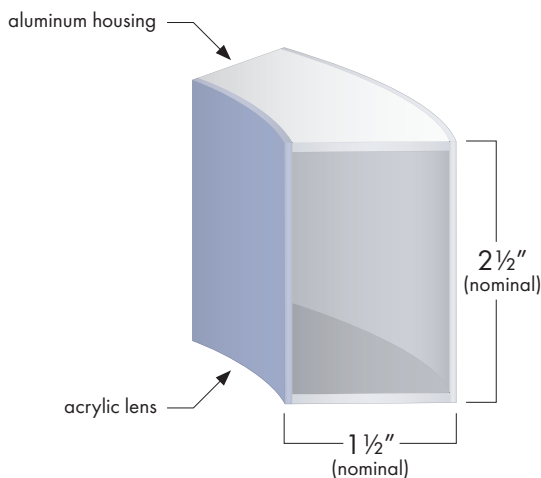

Features

- Diameter:** 24" to 120" (nominal)
- Output:** 93 LPW
- Housing:** Formed aluminum
- Lens:** Transmissive, frosted acrylic
- Mounting:** Pendant or surface
- Driver:** Inside canopy or remote
- Weight:** 2.5 lb/ft (based on Ø)
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website

- Power-over-Cable option
- Mounting option for multi-ring clusters
- RGB+W in standard lumen output range
- Acoustic options available

Project: _____ Type: _____ Date: _____

Order: _____

Example: MOD - RPM-IWL - 60 - MD10000LM - 940 - DIM - MCC - ASL - SCC - RMT

Order Guide



Ø (in.)	Lumen Output	LED	Driver	Mounting
24	SO standard 549 lm/linear ft	Static White	DIM 0-10 V/1%	Pendant
36				
48	HO high 1098 lm/linear ft	830 CRI >80 3000°K	DIM.1 0-10 V/.1%	SPC single point canopies
60				
72	MD modify lumens and watts (consult factory)	835 CRI >80 3500°K	TRC TRIAC/ ELV	MCC multi-cable center canopy (consult for Ø > 96")
84				
84	Example Calculation for a 48" High Output Ring: (4' x 3.14) x 1098 = 13,791 total lumens	840 CRI >80 4000°K	DAL DALI	MRC multi-ring cluster (consult for submittals)
96				
96		930 CRI >90 3000°K	DMX Digital Multiplex (consult factory)	Power-over-Cable (PoC)
120				
		935 CRI >90 3500°K	DIM, DIM.1, DAL, DMX drivers rated 120-277 VAC. TRC drivers rated 120 VAC.	MCC-POC Power-over-Cable with multi-cable center canopy (consult for submittals)
		940 CRI >90 4000°K		
		Dynamic White		Surface
		TW tunable white 2700-6500 °K		SRF surface mount Includes Ø5" j-box cover plate. Specify finish in SRF section of Canopy Finish (1" stand-off from mounting surface)
		WD warm dim 2200-3500 °K		
		Red, Green, Blue + White		
		RGBW30 RGB+W+3000°K		
		RGBW35 RGB+W+3500°K		
		RGBW40 RGB+W+4000°K		
		(consult for TW, WD & RGBW)		



Fixture Finish	Canopy Cord Finish	Options	Acoustic Options
Powder Coat	Powder Coat	RMT remote driver	Panel*
WHT matte white	Standard	BBU remote battery back up with remote driver	FPL light gray
BLK matte black	Canopy Color		FPD dark gray
ASL anodized silver	Cord Color		FPB blue
GRY matte gray (RAL 7035)	WCC white		FPG green
RALX matte RAL color X=code (specify)	BCC black		FPY yellow
CCL custom color (provide chip)	SCC silver		FPR red
	MBC white		* max Ø = 48"
	RAL		** outer wall only
Wood Grain*	RCW RALX		
WG1 ash	RCB RALX		
WG2 teak	RCS RALX		
WG3 walnut	Custom		
WG4 zebrawood	CCW CCL		
Skin*	CCB CCL		
CFS carbon fiber	CCS CCL		
* outer wall only			

Modify & Customize*

MOD indicates a modification to standard spec attributes
CSM indicates a customized feature

standard: RPM-IWL - 96 - SO - 935 - DIM - SPC - BLK - BCC - FPD
 modified Lm: MOD - RPM-IWL - 60 - MD10000LM - 940 - DIM - MCC - ASL - SCC - RMT
 custom ring Ø: CSM - RPM-IWL - 42/67/95 - SO - 840 - DIM - MRC - WHT - WCC

* MOD/CSM placed at the beginning of an order sequence

