




RING WITH BI-DIRECTIONAL GLARE-FREE ILLUMINATION

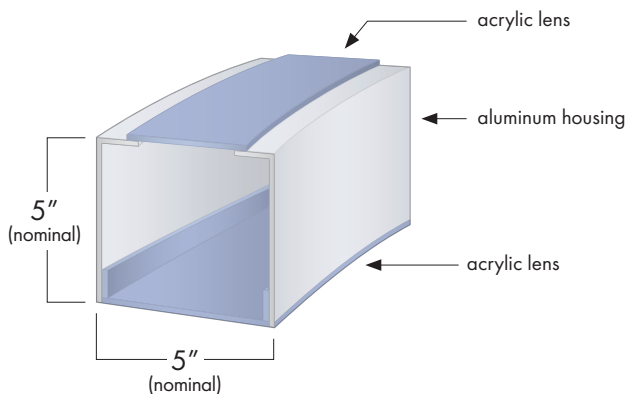

Features

- Diameter:** 24" to 240" (nominal)
- Output:** 95 LPW
- Housing:** Formed aluminum
- Lens:** Transmissive, frosted acrylic
- Mounting:** Pendant
- Driver:** Integral or remote
- Weight:** 5 lb/ft (based on Ø)
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website

- Power-over-Cable option
- Mounting for multi-ring clusters
- RGB+W in standard lumen output range
- Acoustic options available

RP-UP-DN

Ring | Up Light | Downlight

Project: _____ Type: _____ Date: _____

Order: _____

Example: MOD - RP-UP-DN - 60 - MD16000LM - 840 - DIM - MCC - ASL - SCC - RMT

Order Guide



Ø (in.)	Lumen Output	LED	Driver	Mounting
24	SO standard 563 lm/linear ft HO high 1125 lm/linear ft MD modify lumens and watts (consult factory) Example Calculation for a 48" High Output Ring: (4' x 3.14) x 1125 = 14,130 total lumens	Static White 830 CRI >80 3000°K 835 CRI >80 3500°K 840 CRI >80 4000°K 930 CRI >90 3000°K 935 CRI >90 3500°K 940 CRI >90 4000°K Dynamic White TW tunable white 2700-6500 °K WD warm dim 2200-3500 °K Red, Green, Blue + White RGBW30 RGB+W+3000°K RGBW35 RGB+W+3500°K RGBW40 RGB+W+4000°K (consult for TW, WD & RGBW)	DIM 0-10 V/1% DIM.1 0-10 V/.1% TRC TRIAC/ ELV DAL DALI DMX Digital Multiplex (consult factory) DIM, DIM.1, DAL, DMX drivers rated 120-277 VAC. TRC drivers rated 120 VAC.	Pendant SPC single point canopies MCC multi-cable center canopy (consult for Ø > 96") MRC multi-ring cluster (consult for submittals) Power-over-Cable (PoC) MCC-POC Power-over-Cable with multi-cable center canopy (consult for submittals)
36				
48				
60				
72				
84				
96				
120				
144				
168				
192				
240				



Powder Coat WHT matte white BLK matte black ASL anodized silver GRY matte gray (RAL 7035) RALX matte RAL color X=code (specify) CCL custom color (provide chip) Wood Grain WG1 ash WG2 teak WG3 walnut WG4 zebrawood Skin CFS carbon fiber	Powder Coat <table border="1"> <thead> <tr> <th>Standard</th> <th>Canopy Color</th> <th>Cord Color</th> </tr> </thead> <tbody> <tr> <td>WCC</td> <td>white</td> <td>white</td> </tr> <tr> <td>BCC</td> <td>black</td> <td>black</td> </tr> <tr> <td>SCC</td> <td>silver</td> <td>silver</td> </tr> <tr> <td>MBC</td> <td>white</td> <td>silver</td> </tr> <tr> <td>RAL</td> <td></td> <td></td> </tr> <tr> <td>RCW</td> <td>RALX</td> <td>white</td> </tr> <tr> <td>RCB</td> <td>RALX</td> <td>black</td> </tr> <tr> <td>RCS</td> <td>RALX</td> <td>silver</td> </tr> <tr> <td>Custom</td> <td></td> <td></td> </tr> <tr> <td>CCW</td> <td>CCL</td> <td>white</td> </tr> <tr> <td>CCB</td> <td>CCL</td> <td>black</td> </tr> <tr> <td>CCS</td> <td>CCL</td> <td>silver</td> </tr> </tbody> </table>	Standard	Canopy Color	Cord Color	WCC	white	white	BCC	black	black	SCC	silver	silver	MBC	white	silver	RAL			RCW	RALX	white	RCB	RALX	black	RCS	RALX	silver	Custom			CCW	CCL	white	CCB	CCL	black	CCS	CCL	silver	RMT remote driver BBU remote battery back up with remote driver	<table border="1"> <thead> <tr> <th>Panel</th> <th>Skin</th> </tr> </thead> <tbody> <tr> <td>FPL light gray</td> <td>FSL light gray</td> </tr> <tr> <td>FPD dark gray</td> <td>FSD dark gray</td> </tr> <tr> <td>FPB blue</td> <td>FSB blue</td> </tr> <tr> <td>FPG green</td> <td>FSG green</td> </tr> <tr> <td>FPY yellow</td> <td>FSY yellow</td> </tr> <tr> <td>FPR red</td> <td>FSR red</td> </tr> </tbody> </table> (max Ø = 144")	Panel	Skin	FPL light gray	FSL light gray	FPD dark gray	FSD dark gray	FPB blue	FSB blue	FPG green	FSG green	FPY yellow	FSY yellow	FPR red	FSR red
Standard	Canopy Color	Cord Color																																																						
WCC	white	white																																																						
BCC	black	black																																																						
SCC	silver	silver																																																						
MBC	white	silver																																																						
RAL																																																								
RCW	RALX	white																																																						
RCB	RALX	black																																																						
RCS	RALX	silver																																																						
Custom																																																								
CCW	CCL	white																																																						
CCB	CCL	black																																																						
CCS	CCL	silver																																																						
Panel	Skin																																																							
FPL light gray	FSL light gray																																																							
FPD dark gray	FSD dark gray																																																							
FPB blue	FSB blue																																																							
FPG green	FSG green																																																							
FPY yellow	FSY yellow																																																							
FPR red	FSR red																																																							
Modify & Customize*																																																								
MOD indicates a modification to standard spec attributes CSM indicates a customized feature standard: RP-UP-DN - 96 - SO - 935 - DIM - SPC - BLK - BCC - FPD modified Lm: MOD - RP-UP-DN - 60 - MD16000LM - 840 - DIM - MCC - ASL - SCC - RMT custom ring Ø: CSM - RP-UP-DN - 42/67/95 - SO - 840 - DIM - MRC - WHT - WCC * MOD/CSM placed at the beginning of an order sequence																																																								

