




## SLIM VERTICAL RING WITH BI-DIRECTIONAL RADIANCE

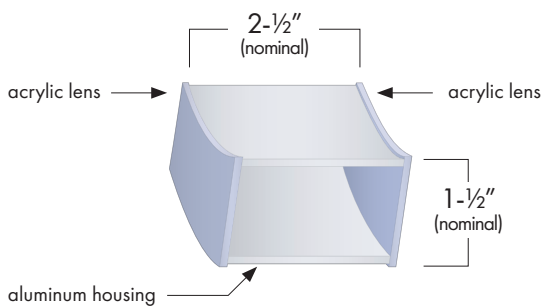

### Features

- Diameter:** 24" to 48" (nominal)
- Output:** 68 LPW
- Housing:** Formed aluminum
- Lens:** Transmissive, frosted acrylic
- Mounting:** Pendant
- Driver:** Inside canopy or remote
- Weight:** ??? lb/ft (based on Ø)
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Consult factory

- Power-over-Cable option
- RGBW in standard lumen output range
- Ships in one piece

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Date: \_\_\_\_\_

Order: \_\_\_\_\_

Example: VRPM -36 - SO - 935 - DIM - DCC - BLK - BCC - RMT

## Order Guide



<b>24</b>	<b>SO</b>	standard 360 lm/ft
<b>36</b>		
<b>48</b>	<b>MD</b>	modify lumens and watts (consult factory)

Static White		
<b>830</b>	CRI >80	3000°K
<b>835</b>	CRI >80	3500°K
<b>840</b>	CRI >80	4000°K
<b>930</b>	CRI >90	3000°K
<b>935</b>	CRI >90	3500°K
<b>940</b>	CRI >90	4000°K

Dynamic White	
<b>TW</b>	tunable white 2700-6500°K
<b>WD</b>	warm dim 2200-3500°K

Red, Green, Blue + White	
<b>RGBW30</b>	RGBW+3000°K
<b>RGBW35</b>	RGBW+3500°K
<b>RGBW40</b>	RGBW+4000°K
(consult for TW, WD & RGBW)	

<b>DIM</b>	0-10 V/1%
<b>DIM.1</b>	0-10 V/.1%
<b>TRC</b>	TRIAC/ ELV
<b>DAL</b>	DALI
<b>DMX</b>	Digital Multiplex (consult factory)
Drivers rated 120-277 VAC	

Pendant   Dual Cable Canopy	
<b>DC10</b>	100" adjustable cables + cord
<b>DC15</b>	150" adjustable cables + cord
<b>DC20</b>	200" adjustable cables + cord

Power-over-Cable (PoC)	
<b>DC10-POC</b>	PoC with 100" adjustable cables + cord
<b>DC15-POC</b>	PoC with 150" adjustable cables + cord
<b>DC20-POC</b>	PoC with 200" adjustable cables + cord  (consult for PoC submittals)



Powder Coat	
<b>WHT</b>	matte white
<b>BLK</b>	matte black
<b>ASL</b>	anodized silver
<b>GRY</b>	matte gray (RAL 7035)
<b>RALX</b>	matte RAL color X=code (specify)
<b>CCL</b>	custom color (provide chip)

Wood Grain	
<b>WG1</b>	ash
<b>WG2</b>	teak
<b>WG3</b>	walnut
<b>WG4</b>	zebrawood

Skin	
<b>CFS</b>	carbon fiber

Powder Coat		
Standard	Canopy Color	Cord Color
<b>WCC</b>	white	white
<b>BCC</b>	black	black
<b>SCC</b>	silver	silver
<b>MBC</b>	white	silver
RAL		
<b>RCW</b>	RALX	white
<b>RCB</b>	RALX	black
<b>RCS</b>	RALX	silver
Custom		
<b>CCW</b>	CCL	white
<b>CCB</b>	CCL	black
<b>CCS</b>	CCL	silver

<b>RMT</b>	remote driver
<b>BBU</b>	remote battery back up with remote driver

## Modify & Customize\*

<b>MOD</b>	indicates a modification to standard spec attributes
<b>CSM</b>	indicates a customized feature
modified lm:	<b>MOD</b> - VRPM - 48 - <b>MD270LM</b> - 840 - DIM - MCC - ASL - SCC - RMT
custom ring Ø:	<b>CSM</b> - VRPM - <b>30</b> - SO - 940 - DIM - DC15 - WHT - WCC
* <b>MOD/CSM</b> placed at the beginning of an order sequence	