
PROJECT NAME	
PROJECT TYPE	

SPS-0365



A - SHADE SIZE

AERO:

SBA12 12" Shade **SBA14** 14" Shade **SBA16** 16" Shade

B - SHADE FINISH

PORCELAIN FINISHES1:

150 Black 250 White 350 Vintage Green 355 **Jadite** 455 Cherry Red 550 Yellow 650 **Bronze** 750 Cobalt Blue 765 Delphite Blue 850 Graphite 950 Metallic Chrome

C - CORDS

CSBW

CSBP

CSUW

CSA LISTED CORD OPTIONS:

Standard Black **SWH** Standard White **CSB** Black Cloth **CSW** White Cloth CSR Red Cloth **CSBB** Black & Brown Cloth **CSRW** Red & White Cloth Gold & White Cloth **CSGW** CSBG Black & Gold Cloth

Black & White Cloth

Black & Pink Cloth

Blue & White Cloth

NON-CSA LISTED CORD OPTIONS:

CBK Black Cotton
CMG Grey Cotton
CRZ Red Chevron

D - CORD AND CABLE LENGTH

18 18" Cable and Cord
24 24" Cable and Cord
30 30" Cable and Cord
36 36" Cable and Cord
42 (Cable and Cord

E - SHADE ACCESSORIES

NA None
WC Wire Cage
TGG Heavy Duty Guard
CGG Cast Guard
WGG Wire Guard

F - GLASS OPTION

NA Not Applicable
 CLR Clear Glass
 FST Frosted Glass
 RIB Ribbed Glass
 CCR Clear Crackle Glass
 SMK Smoke Crackle Glass
 HCR Honey Crackle Glass

G - SHADE ACCESSORY FINISH

Please Note: See **Section B** for all applicable Finish Options.

(I) If no accessory is selected in Section E, select NA

(II) 975-Galvanized Finish also available (III) If Porcelain Finish selected, accessory will be powder coat paintedto-match


NA Not Applicable975 Galvanized

H - SOCKET TYPE

E26 200 Watt Max² **GU24** 24 Bi-Pin, 23W Max^{2,3}

IMPORTANT: (1) All Porcelain Enamel finished shades feature a white interior and a black outer rim (2) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (3) Fixtures configured with GU24 socket are non-returnable

DIMENSIONAL DRAWING

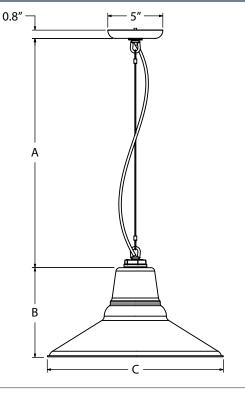

CABLE & CORD	TOTAL LENGTH (A)		
18 18" Cable & Cord	20.8"		
24 24" Cable & Cord	26.8"		
30 30" Cable & Cord	32.8"		
36 36" Cable & Cord	38.8"		
42 42" Cable & Cord	44.8"		

SHADE CODE	HEIGHT (B)	DIAMETER (C)	
SBA12	6.25"	12"	
SBA14	7"	14"	
SBA16	7.75"	16"	

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS *Avg. value, actual value dependent on bulb used	CRI	VOLTAGE	DIMMING		
INCANDESCENT (MED E26)							
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant		
COMPACT FLOURESCENT (GU24 CFL)							
GU24	23W Max	*1600	*75	120 VAC	Bulb Dependant		

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

SHADE & FINISHES

AERO PORCELAIN SHADE

Hand-Spun from 20 Guage Sheet Metal

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

MOUNTING

STUDIO CABLE

Constructed with 3/32" Galvanized Steel Wire Cable

CANOPY

5" Canopy Hand-Spun from 20 Gauge Sheet Metal, Galvanized Finish