



REV 10.22.18

# THE ASTRO SHALLOW BOWL VENTED SERIES

BARN LIGHT RLM FIXTURE FAMILY

Max Weight: 10.0 lbs

PROJECT NAME \_\_\_\_\_

PROJECT TYPE \_\_\_\_\_

SPS-0169



Order Example: BLE - C - VSBA14 - 390 - VC - CSBW - 390 - NA - NA - NA - NA - GU24

### A - MOUNTING STYLE

- C** Cord Hung
- F** Flush Mount
- G** Gooseneck
- S** Stem Mount

### B - SHADE SIZE

#### THE ASTRO SHADE:

- VSBA12** 12" Shade
- VSBA14** 14" Shade
- VSBA16** 16" Shade

### C - SHADE FINISH

#### POWDER COAT FINISHES<sup>1</sup>:

- 100** Black
- 105** Textured Black
- 200** White
- 300** Dark Green
- 307** Emerald Green
- 311** Jadite
- 370** Mint
- 380** Chartreuse
- 390** Teal
- 400** Barn Red
- 420** Orange
- 470** Watermelon
- 480** Blush Pink
- 490** Magenta
- 500** Buttery Yellow
- 570** Sunflower
- 600** Bronze
- 601** Chocolate
- 605** Rust
- 615** Oil-Rubbed Bronze
- 700** Royal Blue
- 705** Navy
- 710** Cobalt Blue
- 715** Delphite Blue
- 800** Industrial Grey
- 805** Charcoal Granite
- 810** Graphite
- 975** Galvanized

#### NATURAL FINISHES<sup>3</sup>:

- 995** Raw Copper
- 996** Weathered Copper
- 997** Raw Brass
- 998** Weathered Brass
- 999** Oil-Rubbed Copper

### D - VENT OPTION

- VC** Circle Vent
- VS** Narrow Slot Vent

### E - MOUNTING

#### CSA LISTED CORD OPTIONS:

- SBK** Standard Black
- SWH** Standard White
- CSB** Black Cloth
- CSW** White Cloth
- CSR** Red Cloth
- CSBB** Black & Brown Cloth
- CSRW** Red & White Cloth
- CSGW** Gold & White Cloth
- CSBG** Black & Gold Cloth
- CSBW** Black & White Cloth
- CSBP** Black & Pink Cloth
- CSUW** Blue & White Cloth

#### NON-CSA LISTED CORD OPTIONS:

- CBK** Black Cotton
- CMG** Grey Cotton
- CRZ** Red Chevron
- TBK** Black Cotton Twist
- TWH** White Cotton Twist
- TBR** Brown Cotton Twist
- TRD** Red Cotton Twist
- TPT** Putty Cotton Twist
- TBW** Black & White Twist
- TRW** Red & White Twist
- TBB** Brown & Beige Twist

#### FLUSH MOUNT OPTIONS: FM<sup>2</sup>

#### GOOSENECK OPTIONS:

- G1<sup>2</sup>** **G16<sup>2</sup>**
- G2<sup>2</sup>** **G17**
- G3<sup>2</sup>** **G19<sup>2</sup>**
- G4** **G22**
- G5<sup>2</sup>** **G24**
- G6** **G25**
- G7** **G26<sup>2</sup>**
- G8** **G32**
- G9** **G34<sup>2</sup>**
- G10** **G35<sup>2</sup>**
- G11<sup>2</sup>** **G36<sup>2</sup>**
- G12<sup>2</sup>** **G40<sup>2</sup>**
- G13** **G64<sup>2</sup>**

### E - MOUNTING (CONTINUED)

#### GOOSENECK OPTIONS:

- G14** **G65<sup>2</sup>**
- G15**

#### STEM MOUNT OPTIONS:

- ST506** .5" Stem Mount, 6"<sup>2</sup>
- ST512** .5" Stem Mount, 12"<sup>2</sup>
- ST518** .5" Stem Mount, 18"<sup>2</sup>
- ST524** .5" Stem Mount, 24"<sup>2</sup>
- ST536** .5" Stem Mount, 36"<sup>2</sup>
- ST548** .5" Stem Mount, 48"<sup>2</sup>
- ST706** .75" Stem Mount, 6"
- ST712** .75" Stem Mount, 12"
- ST718** .75" Stem Mount, 18"
- ST724** .75" Stem Mount, 24"
- ST736** .75" Stem Mount, 36"
- ST748** .75" Stem Mount, 48"

### F - MOUNTING FINISH

Please Note: See **Section C** for all applicable Mounting Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles.

(I) If Cord Hung [C] Mounting Style, selection identifies canopy finish

(II) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

(III) If Gooseneck [G] Mounting Style, selection identifies gooseneck and backing plate finish

- 980** Brushed Aluminum

### G - CORDS<sup>4</sup>

Please Note: See **Section E** for all applicable CSA Listed Cord Options. Non-CSA Listed Cord Options for Chain Hung Mounting Style limited to: Black Cotton [CBK], Red Chevron [CRZ] and Grey Cotton [CMG]

- NA** Not Applicable

### H - WIRE CAGE

- NA** None
- WC** Wire Cage<sup>2</sup>

### I - WIRE CAGE FINISH

Please Note: See **Section C** for Wire Cage Finish Options, if no Wire Cage is selected in Section H, select NA.

(I) Wire Cage not available in Natural Finishes

- NA** Not Applicable

### J - MOUNTING ACCESSORY

- NA** None/Not Applicable
- HSC** Hang Straight Canopy<sup>2,4</sup>
- HDSMC** Heavy Duty Stem Mount Canopy<sup>2,4</sup>
- HDBP** Heavy Duty Backing Plate<sup>2,5</sup>
- DD** Dusk-to-Dawn Photocell<sup>5</sup>
- DBPC** Decorative Backing Plate Cover<sup>6</sup>
- DCHX** Decorative Backing Plate Cover & Hex Cover<sup>6</sup>


### K - LIGHT SOURCE

- E26** 200 Watt Max
- GU24** 24 Bi-Pin, 23W Max<sup>7</sup>


**IMPORTANT:** (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Not available in Natural Finishes (3) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (4) Only applicable with Stem Mount Mounting Style (5) Only applicable with Gooseneck Mounting Style (6) Accessory will match the Natural Finish selected in Section C, unless powder coat finish is selected (7) Fixtures configured with a GU24 socket are non-returnable (8) Natural Finishes have a longer estimated lead time, please check the website for exact manufacturing time. There are no returns accepted on Natural Finishes.

**MOUNTING STYLE**


**CHAIN HUNG PENDANT (CN)**

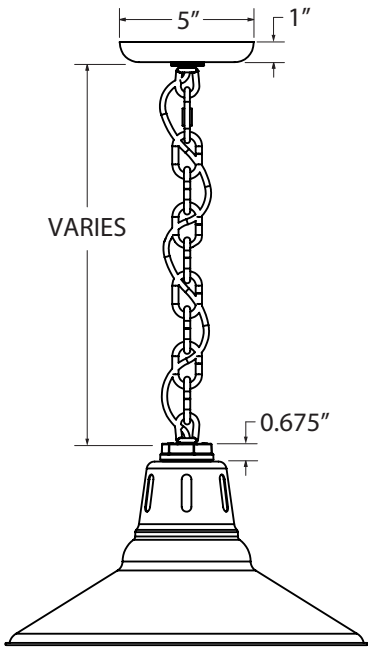


**FLUSH MOUNT (F)**

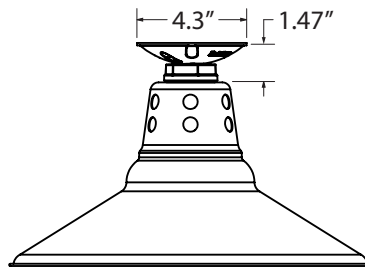


**STEM MOUNT PENDANT (S)**

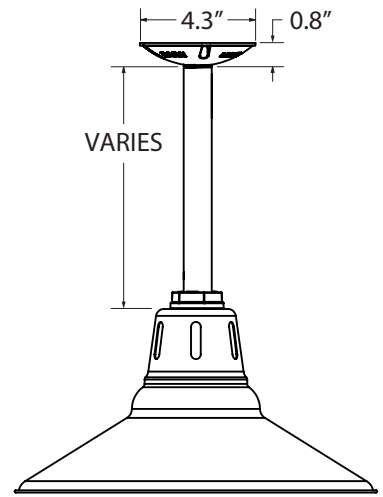

**CORD HUNG PENDANT (C)**

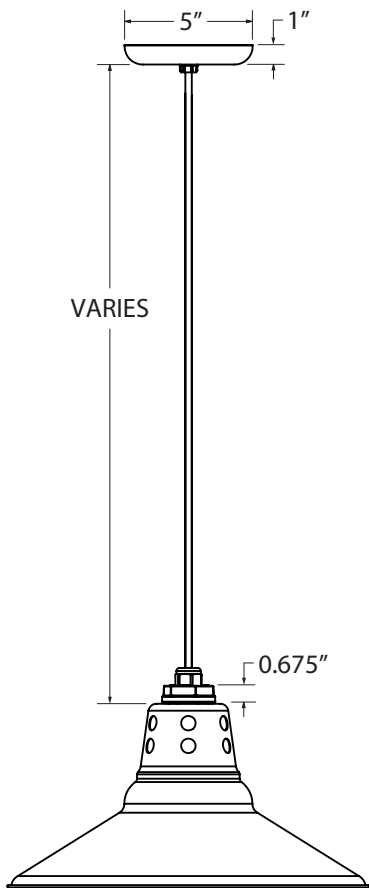


**GOOSENECK (G)**

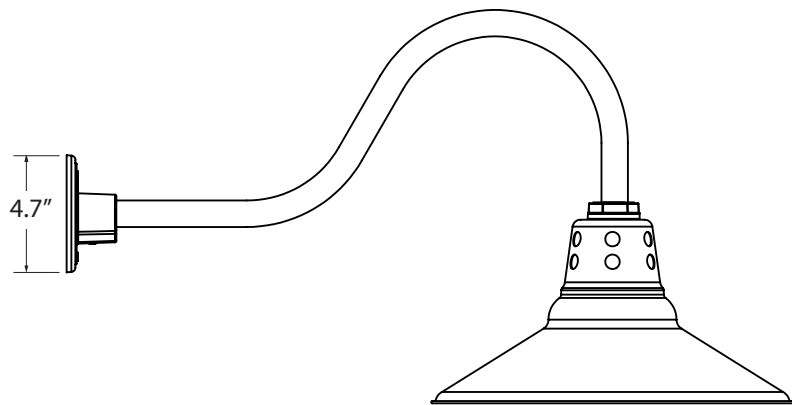

SHOWN WITH: G22 GOOSENECK ARM


**AVAILABLE SHADE SIZES**

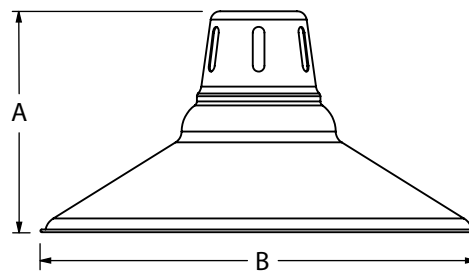

SHADE CODE	HEIGHT (A)	DIAMETER (B)
VSBA12	6.25"	12"
VSBA14	7"	14"
VSBA16	7.75"	16"


**VENT OPTION**

**CIRCLE VENT (VC)**

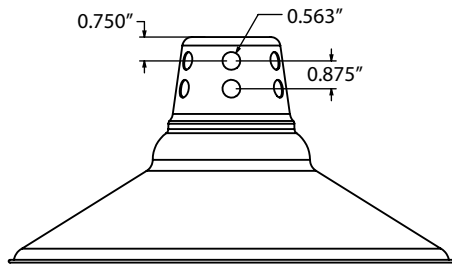

12 Circle Vents total on shade

**NARROW SLOT VENT (VS)**

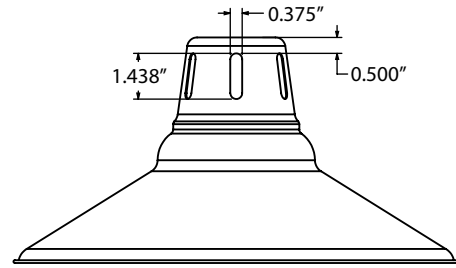

6 Narrow Slot Vents total on shade

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant
<b>COMPACT FLOURESCENT (GU24 CFL)</b>					
GU24	23W Max	*1600	*75	120 VAC	Bulb Dependant

**SPECIFICATIONS**

**MOUNTING**

**STEM**  
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

**GOOSENECK**  
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

**CORD**  
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

**SHADE & FINISHES**

**ASTRO SHADE**  
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

**POWDER COAT FINISHES**  
Polyester Powder Coat Finishes Are Electro-Staticly Applied and Thermocured

**CERTIFICATIONS, LISTINGS & WARRANTY**

**MADE IN THE USA**  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

**CSA LISTED FOR DAMP LOCATIONS**  
Includes Gooseneck, Chain, Stem, Flush and Select Cord Mounting Styles

**CSA LISTED FOR DRY LOCATIONS**  
Includes Select Cord Mounting Styles

**LIMITED WARRANTY**  
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions