



SPS-0591 REV C

# ALTO WOODEN CYLINDER PENDANT LIGHT

JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_





BLE - C - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - GU10  
 A B C D E F G

Order Example: BLE - C - ATO9 - 715 - WAL - SBK - 100 - WCC - GU10

<h3>A - CYLINDER SIZE</h3> <p>ALTO:</p> <p><b>ATO9</b> 9" Cylinder  <b>ATO15</b> 15" Cylinder  <b>ATO21</b> 21" Cylinder  <b>ATO27</b> 27" Cylinder</p>	<h3>B - CUP FINISH (CONTINUED)</h3> <p><b>POWDER COAT FINISHES:</b></p> <p><b>601</b> Chocolate  <b>605</b> Rust  <b>615</b> Oil-Rubbed Bronze  <b>700</b> Royal Blue  <b>705</b> Navy  <b>710</b> Cobalt Blue  <b>715</b> Delphite Blue  <b>790</b> Lavender  <b>800</b> Industrial Grey  <b>805</b> Charcoal Granite  <b>810</b> Graphite  <b>975</b> Galvanized  <b>980</b> Brushed Aluminum  <b>990</b> Raw/Unfinished</p> <p><b>NATURAL METALS<sup>1</sup>:</b></p> <p><b>995</b> Raw Copper  <b>996</b> Weathered Copper  <b>997</b> Raw Brass  <b>998</b> Weathered Brass  <b>999</b> Oil-Rubbed Copper</p>	<h3>D - CORDS<sup>2</sup></h3> <p><b>CSA LISTED CORD OPTIONS:</b></p> <p><b>SBK</b> Standard Black Cord  <b>SWH</b> Standard White Cord</p>
<h3>B - CUP FINISH</h3> <p><b>POWDER COAT FINISHES:</b></p> <p><b>100</b> Black  <b>105</b> Textured Black  <b>106</b> Matte Black  <b>200</b> White  <b>206</b> Matte White  <b>300</b> Dark Green  <b>307</b> Emerald Green  <b>311</b> Jade  <b>370</b> Mint  <b>380</b> Chartreuse  <b>390</b> Teal  <b>400</b> Barn Red  <b>420</b> Orange  <b>470</b> Watermelon  <b>480</b> Blush Pink  <b>490</b> Magenta  <b>495</b> Sherbet Orange  <b>500</b> Buttery Yellow  <b>570</b> Sunflower  <b>600</b> Bronze</p>	<h3>C - WOODEN CYLINDER</h3> <p><b>ASH</b> Ash Wood  <b>WAL</b> Walnut Wood</p>	<h3>E - CEILING CANOPY FINISH</h3> <p>Please Note: See <b>Section A</b> for all applicable Powder Coat Ceiling Canopy Finish Options.</p> <h3>F - OPTIONAL WOODEN CANOPY COVER</h3> <p>If Optional Wooden Canopy Cover is chosen, please select <b>WCC</b>, this will match the wood chosen in <b>Section B</b>. If no Optional Wooden Canopy Cover is selected, please select <b>NA</b>.</p> <p><b>NA</b> Not Applicable  <b>WCC</b> Wood Canopy Cover</p>
<h3>G - LIGHT SOURCE</h3> <p><b>GU10</b> 20 Watt Max</p>		

**IMPORTANT:** (1) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (2) 7' of standard cord is included, cord cannot exceed 12'

## MOUNTING DIMENSIONS

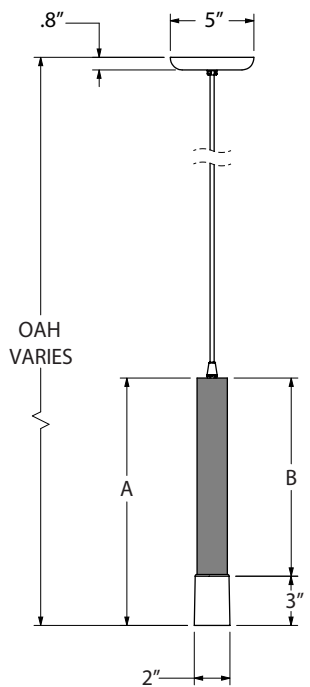

**Shaded Area Indicates Wood Components**

CYLINDER CODE	HEIGHT (A)	WOOD LENGTH (B)
ATO9	9"	6"
ATO15	15"	12"
ATO21	21"	18"
ATO27	27"	24"

**SPECIFICATIONS**

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
Located in Titusville, FL

WOOD SOURCING AND SUSTAINABILITY  
All Wood Is Sourced from North American Suppliers Who Practice  
Responsible Forestry. With Sustainability in Mind, Our Material  
Suppliers Have Policies in Place Regarding Planned Felling,  
Minimum Tree Diameter, and Felling Rotation to Ensure Regrowth.

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See  
Our Terms & Conditions

**CONSTRUCTION & FINISH**

CUP & CANOPY  
Hand-Spun from High Purity 3003-O Temper Aluminum

CORD  
Cord-Hung Pendants Include 7' of Standard Cord, 12' max, +/- For  
Socket Orientation

WOOD  
The Wood Detailing of Our American-Made Lighting Is Handcrafted  
from Solid Hardwoods by Our In-House Artisans.  
Custom Woods Are Available upon Request, Please Contact Our  
Sales Team for Additional Information.

WOOD FINISH  
The Finish Is a Hand-Rubbed Danish Oil Which Is Buffed and Waxed  
to a Natural Sheen Using Pure Carnauba Wax

POWDER COAT FINISHES  
Polyester Powder Coat Finishes Are Electro-Statically Applied and  
Thermocured

COPPER  
Hand-Spun from High Purity C11000-O60 ETP Copper

BRASS  
Hand-Spun from High Purity C2600-O60 Brass

**LIGHT SOURCE**

COMPACT FLUORESCENT  
Bi-Pin Base GU10 Socket, 120 VAC, 20 Watt Max