




SPS-0161 REV B

CHEROKEE UPLIGHT SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F G

H

Order Example: BLE - C - ULC18 - 420 - CSRW - 200 - RIB - NA - GU24

A - MOUNTING STYLE

- C** Cord Hung
S Stem Mount
G Gooseneck
F Flush Mount

B - SHADE & SHADE SIZE**CHEROKEE UPLIGHT:**

- ULC12** 12" Shade
ULC14 14" Shade
ULC16 16" Shade
ULC18 18" Shade

C - SHADE FINISH**POWDER COAT FINISHES¹:**

- 100** Black
105 Textured Black
106 Matte Black
200 White
206 Matte White
300 Dark Green
307 Emerald Green
311 Jadite
370 Mint
380 Chartreuse
390 Teal
400 Barn Red
420 Orange
470 Watermelon
480 Blush Pink
490 Magenta
495 Sherbet Orange
500 Buttery Yellow
570 Sunflower
600 Bronze
601 Chocolate
605 Rust
615 Oil-Rubbed Bronze
700 Royal Blue
705 Navy
710 Cobalt Blue
715 Delphite Blue
790 Lavender
800 Industrial Grey
805 Charcoal Granite
810 Graphite
975 Galvanized

NATURAL METALS²:

- 995** Raw Copper
996 Weathered Copper
997 Raw Brass
998 Weathered Brass
999 Oil-Rubbed Copper

D - MOUNTING

Please Note: If Flush Mount [F] is selected in Section A, please select NA

- NA** Not Applicable

CSA LISTED CORD OPTIONS:

- SBK** Standard Black
SWH Standard White
CSB Black Cloth
CSW White Cloth
CSR Red Cloth
CSBB Black & Brown Cloth
CSRW Red & White Cloth
CSGW Gold & White Cloth
CSBG Black & Gold Cloth
CSBW Black & White Cloth
CSBP Black & Pink Cloth
CSUW Blue & White Cloth
CMG Grey Cotton
CRZ Red Chevron

NON-CSA LISTED CORD OPTIONS:

- TBK** Black Cotton Twist
TWH White Cotton Twist
TBR Brown Cotton Twist
TRD Red Cotton Twist
TPT Putty Cotton Twist
TBW Black & White Twist
TRW Red & White Twist
TBB Brown & Beige Twist

STEM MOUNT OPTIONS:

- ST506** .5" Stem Mount, 6"³
ST512 .5" Stem Mount, 12"³
ST518 .5" Stem Mount, 18"³
ST524 .5" Stem Mount, 24"³
ST536 .5" Stem Mount, 36"³
ST548 .5" Stem Mount, 48"³
ST706 .75" Stem Mount, 6"
ST712 .75" Stem Mount, 12"
ST718 .75" Stem Mount, 18"
ST724 .75" Stem Mount, 24"
ST736 .75" Stem Mount, 36"
ST748 .75" Stem Mount, 48"

D - MOUNTING (CONTINUED)**GOOSENECK OPTIONS:**

- | | |
|-------------------------|------------------------|
| G1³ | G16³ |
| G2³ | G17 |
| G3^{3,4} | G19³ |
| G4⁴ | G22 |
| G5³ | G24 |
| G6³ | G25 |
| G7 | G26³ |
| G8 | G32 |
| G9 | G34³ |
| G10 | G35³ |
| G11³ | G36³ |
| G12³ | G40³ |
| G13 | G64³ |
| G14 | G65³ |
| G15 | |

E - MOUNTING FINISH

Please Note: See Section C for Finish Options. 980-Brushed Aluminum is also available for Gooseneck (except G36, G40, G64 & G65) and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match.

(I) If Cord Hung [C] or Flush Mount [F] Mounting Style, selection identifies canopy finish

(II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish
 (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

- 980** Brushed Aluminum

F - GLASS OPTION

- CLR** Clear Glass
FST Frosted Glass
RIB Ribbed Glass
BLU Blue Glass
RED Red Glass
AMB Amber Glass
GRN Green Glass

G - MOUNTING ACCESSORY

- NA** None/Not Applicable
HSC Hang Straight Canopy^{3,5}
HDSMC Heavy Duty Stem Mount Canopy^{3,5}
HDBP Heavy Duty Backing Plate^{3,6,7}
DD Dusk-to-Dawn Photocell^{6,7}
DBPC Decorative Backing Plate Cover^{6,7}
DCHX Decorative Backing Plate Cover & Hex Cover^{6,7}


H - LIGHT SOURCE

- E26** 100 Watt Max
GU24 24 Bi-Pin, 18W Max⁸


IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (3) Not available in Natural Metals (4) Not compatible with 16" sized shade or larger (5) Only applicable if Stem Mounting Style selected in Section A (6) Only applicable if Gooseneck Style selected in Section A (7) Not available with G19 & G40 (8) Fixtures configured with a GU24 socket are non-returnable

MOUNTING STYLE


CORD HUNG PENDANT (C)

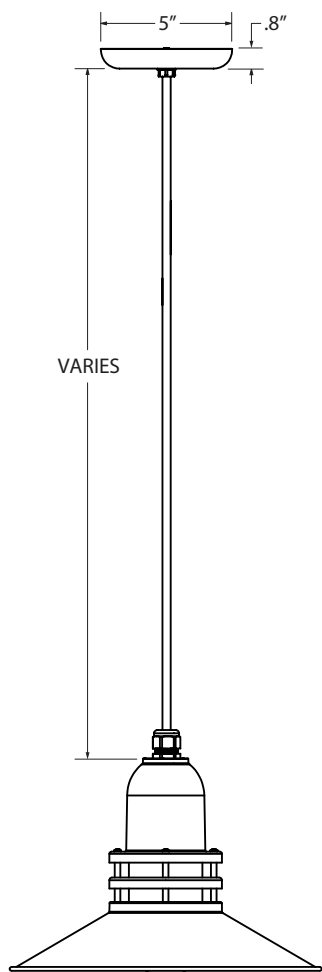


FLUSH MOUNT (F)

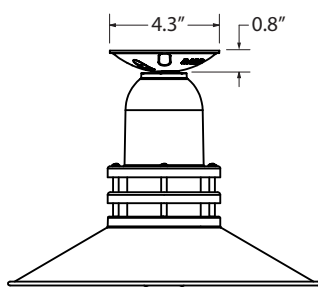

STEM MOUNT PENDANT (S)

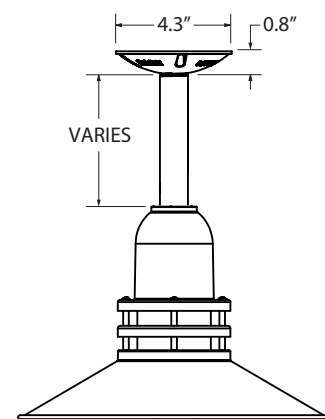


GOOSENECK (G)

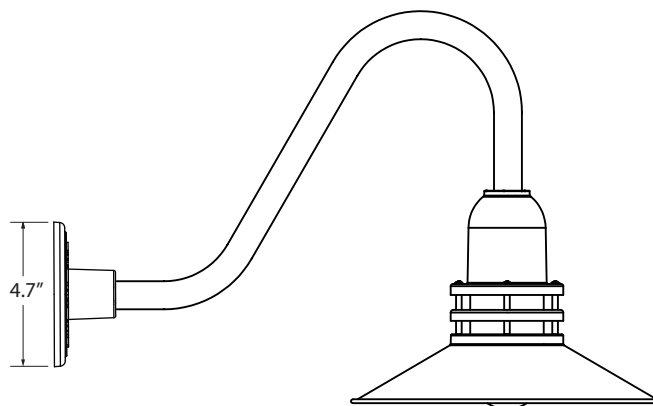

SHOWN WITH: G26 GOOSENECK ARM

AVAILABLE SHADE SIZES

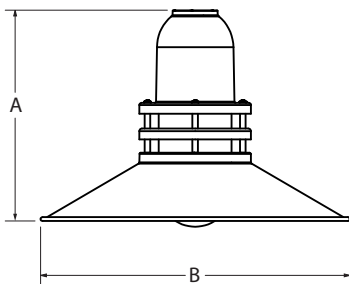

SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULC12	9.5"	12"
ULC14	10"	14"
ULC16	10.75"	16"
ULC18	11.25"	18"

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
Includes All Gooseneck, Stem and Flush Mounting Styles

CSA LISTED FOR DAMP LOCATIONS
Includes All Chain and Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

CONSTRUCTION & FINISH

POWDER COAT SHADE
Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZE SHADE
Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

COPPER
Hand-Spun from High Purity C11000-O60 ETP Copper

BRASS
Hand-Spun from High Purity C2600-O60 Brass

STEM
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Mounting Stem. Custom Lengths Available upon
Request.

GOOSENECK
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

CORD
Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or
Cloth Cord, +/- For Socket Orientation

CHAIN
4-Gauge Chain Complete with Quick Link for On-Site Adjustments
to Chain's Length

LIGHT SOURCE

INCANDESCENT
Medium Base E26 Socket, 120 VAC, 100W Max

COMPACT FLUORESCENT
Bi-Pin Base GU24 Socket, 120 VAC, 18W Max