




SPS-0551 REV B

COOPER LED PENDANT LIGHT

JOB NAME: _____ FIXTURE TYPE: _____



BLE - C - CBYC - _____ - _____ - _____ - _____ - _____ - _____
A B C D E F

Order Example: BLE - C - CBYC - 420 - CSB - 420 - LED16 - 3500K - DL

A - SHADE FINISH

POWDER COAT FINISHES¹:

- 100 Black
- 105 Textured Black
- 200 White
- 300 Dark Green
- 307 Emerald Green
- 311 Jadite
- 370 Mint
- 380 Chartreuse
- 390 Teal
- 400 Barn Red
- 420 Orange
- 470 Watermelon
- 480 Blush Pink
- 490 Magenta
- 495 Sherbet Orange
- 500 Buttery Yellow
- 570 Sunflower
- 600 Bronze
- 601 Chocolate
- 605 Rust
- 615 Oil-Rubbed Bronze
- 700 Royal Blue
- 705 Navy
- 710 Cobalt Blue
- 715 Delphite Blue
- 790 Lavender
- 800 Industrial Grey
- 805 Charcoal Granite

A - SHADE FINISH (CONTINUED)

POWDER COAT FINISHES¹:

- 810 Graphite
- 975 Galvanized

NATURAL FINISHES²:

- 995 Raw Copper
- 996 Weathered Copper
- 997 Raw Brass
- 998 Weathered Brass
- 999 Oil-Rubbed Copper

B - CORD OPTION

CSA LISTED CORD OPTIONS:

- SBK Standard Black
- SWH Standard White
- CSB Black Cloth
- CSW White Cloth
- CSR Red Cloth
- CSBB Black & Brown Cloth
- CSRW Red & White Cloth
- CSGW Gold & White Cloth
- CSBG Black & Gold Cloth
- CSBW Black & White Cloth
- CSBP Black & Pink Cloth
- CSUW Blue & White Cloth
- CMG Grey Cotton
- CRZ Red Chevron

C - CEILING CANOPY FINISH

Please Note: See **Section A** for all applicable ceiling canopy finish options

D - LUMENS

- LED11 850 Lumen, 11W LED
- LED16 1250 Lumen, 16W LED

E - COLOR TEMPERATURE


- 2700K 2700K, Warm White
- 3000K 3000K, Neutral White
- 3500K 3500K, Bright White
- 4000K 4000K, Cool White

F - LED LENS

- DL Domed Lens
- FL Flat Lens

IMPORTANT: (1) All Powder Coat finished shades, excluding 975-Galvanized, feature a white interior (2) Natural Finishes have a longer estimated lead time, please check the website for exact lead time. No returns are accepted on Natural Finishes

DIMENSIONAL DRAWING

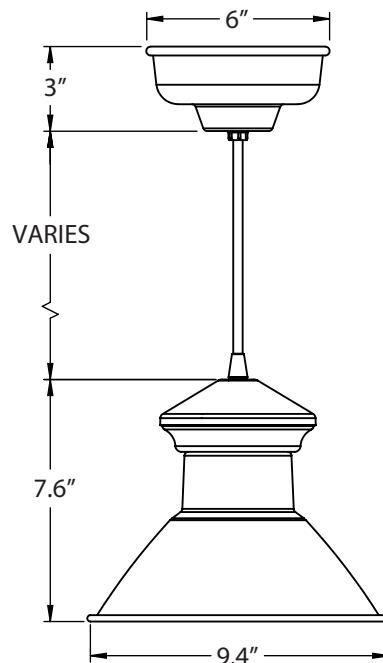

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

LED SPECIFICATIONS

LUMEN MAINTENANCE
L90(6K) > 36,300 Hours

COLOR TEMPERATURES
Standard Color Temperatures Available Include 2700K, 3000K,
3500K and 4000K. Custom Temperatures Available Upon Request.

CRI
Minimum 90 CRI. Consult Factory For Other CRI Options

EFFICACY
Up to 100 LPW Based On Wattage/Lumens

DRIVER & DIMMING OPTION
850 and 1250 Lumen, Reliant on Triac Dimming 12W / 120V
Mounted In Canopy, Up To 5% Dimming

CONSTRUCTION & FINISH

COOPER SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper
Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

MAX FIXTURE WEIGHT
10 lbs

CANOPY
6" Hand-Spun, High Purity 0.050" Thick 3003-O Temper Aluminum
Canopy

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton
Cord, +/- For Socket Orientation