




SPS-0725 REV A

STREAMLINE QUICK SHIP LED INDUSTRIAL GUARD SCNCE

JOB NAME: _____ FIXTURE TYPE: _____




BLE - W - QS - CGG - _____ - _____ - _____ - LED16.8 - _____
A B C D E

Order Example: BLE - W - QS - CGG - 200 - NA - FST - LED16.8 - 3000K


A - FINISHES POWDER COAT FINISHES: 100 Black 200 White 600 Bronze 975 Galvanized	B - OPTIONAL SHADE NA No Shade WH Warehouse Shade	C - GLASS OPTIONS CLR Clear Glass ¹ FST Frosted Glass	D - LIGHT SOURCE LED16.8 1600 Lumen E - COLOR TEMPERATURE 3000K 3000K, Neutral White 4000K 4000K, Cool White
--	--	---	---

IMPORTANT: (1) Clear Glass not recommended


MOUNTING DIMENSIONS

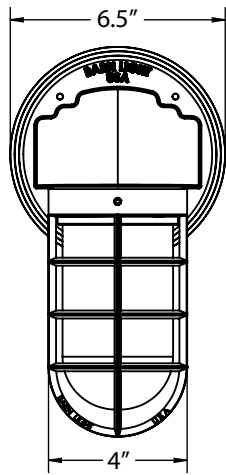


SHOWN WITH: NO OPTIONAL SHADE

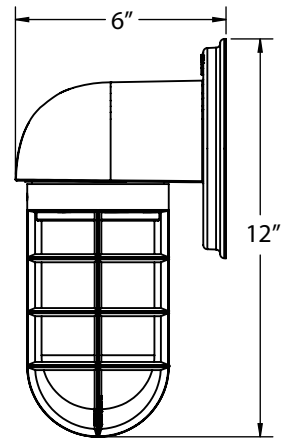

SIDE VIEW

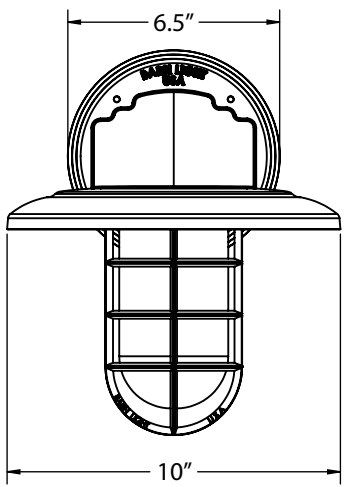

SHOWN WITH: WAREHOUSE SHADE

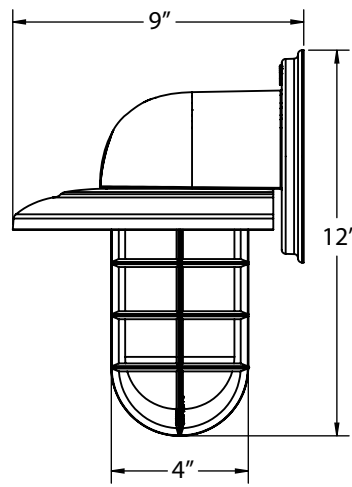

SIDE VIEW

SPECIFICATIONS (CONT'D.)

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
**Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
 Located in Titusville, FL**

CSA LISTED FOR WET LOCATIONS
Vertical Orientation Only, Cast Guard Pointing Down

LIMITED WARRANTY
**For Additional Information on Our Limited Warranty, Please See
 Our Terms & Conditions**

CONSTRUCTION & FINISH

OPTIONAL SHADE
Hand-Spun from High Purity 3003-O Temper Aluminum

POWDER COAT FINISHES
**Polyester Powder Coat Finishes Are Electro-Statically Applied and
 Thermocured**

LED LIGHT SOURCE

AVAILABLE CCT: 3000K, 4000K

90+ CRI

LED16.8 ELECTRICAL/LED DRIVER

DRIVE CURRENT: 400mA

POWER FACTOR > 0.9

EFFICIENCY: UP TO 85% TYPICAL

INPUT VOLTAGE: 120 VAC

CLASS 2 POWER SUPPLY

LED DRIVER LIFETIME: > 100,000 HOURS (@ 25 DEG C AMBIENT)

IP20 MINIMUM RATING CASE WITH SILICONE-BASED POTTING

PROTECTIONS

**Output Open Load, Over-Current and Short-Circuit (hiccup), and
 Over-Temperature with Auto Recovery**

CONDUCTED AND RADIATED EMI

**Compliant with FCC CFR Title 47 Part 15 Class B (120 VAC), Class A
 (277 VAC) and EN55015 (CISPR 15) at 220, 230 and 240 VAC**

COMPLIANT WITH

**Complies with Energy Star® DLR (DesignLight Consortium®) and CA
 Title 24 Technical Requirements**

DIMMING

LED 16.8
**Triac & ELV Dimming at 120VAC, Able to Dim down to 1%.
 Dependent on Specific Dimmer.
 0-10V Dimming Available upon Request.**

COMPATIBLE DIMMERS
Consult Factory for Additional Information on Dimming