
$$\text{BLE - C - QS} = \frac{\quad}{A} - \frac{\quad}{B} - \frac{\quad}{C} - \frac{\quad}{D} - \frac{\quad}{E} - \frac{\quad}{F} - \frac{\text{DL}}{G}$$

Order Example: BLE - C - QS - WHS16 - 100 - SBK - NA - LED16 - 3000K - DL

A - SHADE SIZE

THE ORIGINAL™:

WHS12	12" Shade
WHS16	16" Shade

B - SHADE FINISH

POWDER COAT FINISHES¹:

100	Black
200	White
600	Bronze
975	Galvanized

C - CORDS

CSA LISTED CORD OPTIONS:

SBK	Standard Black Cord
SWH	Standard White Cord

D - SHADE ACCESSORY

NA	None/No Wire Cage
WC	Wire Cage ²

E - LIGHT SOURCE

LED16	1250 Lumen
LED38	3000 Lumen

F - COLOR TEMPERATURE

3000K 3000K, Neutral White
4000K 4000K, Cool White


G - LED LENS

DL Domed Lens

IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) If selected, shade accessory finish will match selection in Section B


MOUNTING DIMENSIONS

CORD HUNG PENDANT (C)

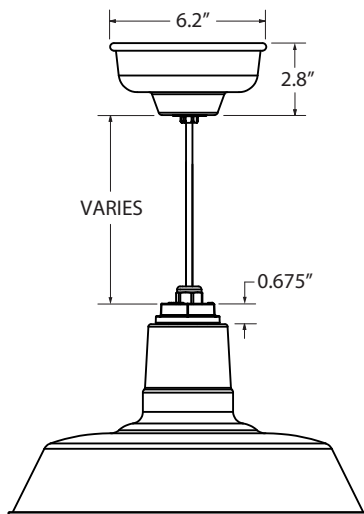


Canopy shown required if LED16 Light Source selected in Section E

HIGH LUMEN CANOPY FOR PENDANT



Required if LED 38 Light Source
selected in Section E

LUMINAIRE DIMENSIONS

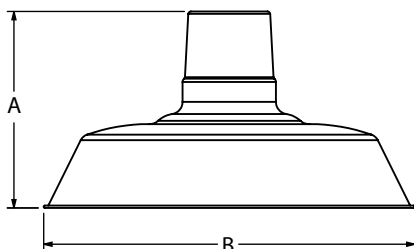

SHADE CODE	HEIGHT (A)	DIAMETER (B)
WHS12	7"	12"
WHS16	7.75"	16"

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

**Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL**

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY

**For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions****CONSTRUCTION & FINISH**

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES

**Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured**

CORD

**Cord-Hung Pendants Include 7' of Standard Cord, +/- For Socket
Orientation****LED LIGHT SOURCE**

AVAILABLE CCT: 3000K, 4000K

90+ CRI

ELECTRICAL/LED DRIVER

POWER FACTOR > 0.9

EFFICIENCY: UP TO 87% TYPICAL

INPUT VOLTAGE: 120-277 VAC (SEE DIMMING SECTION)

CLASS 2 POWER SUPPLY

LED DRIVER LIFETIME: > 100,000 HOURS (@ 25 DEG C AMBIENT)

IP64 MINIMUM RATING CASE WITH SILICONE-BASED POTTING

PROTECTIONS

**Output Open Load, Over-Current and Short-Circuit (Hiccup), and
Over-Temperature with Auto Recovery**

CONDUCTED AND RADIATED EMI

**Compliant with FCC CFR Title 47 Part 15 Class B (120 VAC), Class A
(277 VAC) and EN55015 (CISPR 15) at 220, 230 and 240 VAC**

COMPLIANT WITH

**Complies with Energy Star® DLR (DesignLight Consortium®) and CA
Title 24 Technical Requirements****DIMMING**

TRI-MODE DIMMING™

**Compatible with TRIAC (Forward-Phase or Leading-Edge), ELV
(Reverse-Phase or Trailing-Edge) and 0-10 V Dimmers**

TRIAC AND ELV DIMMING ONLY AT 120 VAC

DIMMING RANGE 1-100%

**The Dimming Range is Dependent on Each Specific Dimmer. May
not be able to Achieve 1% Dimming with Some Dimmers**

ELV DIMMING AT 230 VAC

Available by Request