



106T

Application Interior linear cove, wall slot, shelf and cabinet illumination.
IP Rating 50
Mounting Surface mount. Includes aluminum mounting channel with wiring compartment. Comes with 3' (914mm) wire lead.
Electrical 1W, 350mA LEDs.
 Powered by remote 120V primary, constant voltage driver. Recommended TLDAV100W24. Dimmable with 0~10V dimming controller (TLC010i, not included). Consult factory.

Dimmable options:

Lutron model: output 25-96W 24VDC, compatible with LutronEcosystem/3-wire dimmer, dim to 0.1% with Lutron NTF-10 dimmer (recommend to load up to 80W)
 SC Power model: output 5-96W 24VDC, compatible with forward phase dimmers, dim to 1% with Lutron Skylark incandescent dimmer, 4-6% with Lutron MLV dimmers (recommend to load up to 60W due to low PF and efficiency.)

**See website for recommended drivers*

**Remote emergency driver / inverter options available. Consult factory.*

Power Consumption S2 = 8W/foot (at 350 mA, 6.0 watt)
 S3 = 6W/foot (at 230 mA, 4.0 watt)
Light Output 6.0 Watt, 1060lm
 4.0 Watt, 713 lm
**For photometric data, see page 03*

Warranty 5 years limited warranty
 Estimated useful life of LED is 50,000 hours.

Material Aluminum and polycarbonate. RoHS compliant.

Weight 0.90lbs (0.41kg)/foot

Approval
 C_{US} SR[®] DC AC

Type:

Project:

Modified:

Quantity:

Notes:

DISCLAIMER - When using a control system, consult dimming system manufacturer with minimum load before installing 12V AC transformer. Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.


*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.

Order Guide

Example: L106-T-X-S2-W30S-S-F-D-MA

Code	Mount	Length	Spacing**	Color	Beam	Lens	Input Voltage	Finish
L106	T	-				F	D	-
	T = tiltable	X = Custom* * custom length 1' long (305mm) min 6" (152.4mm) increments 8' (2438mm) max	S2 = 2" (51mm) S3 = 3" (76mm) **between LEDs	W20S = 2000K, 80+CRI W22S = 2200K, 80+CRI W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W41S = 4100K, 80+CRI W27H = 2700K, 90+CRI W30H = 3000K, 90+CRI W35H = 3500K, 90+CRI	S = spot (12°) N = narrow flood (30°)	F = flat frosted	D = DC *increments of 6" (152mm)	MA = matte clear anodized BA = black anodized BZ = bronze
					NOTE: S2 = 12'(3658mm) max. per 100W24V driver S3 = 18'(5486mm) max. per 100W24V driver			

Dimension:

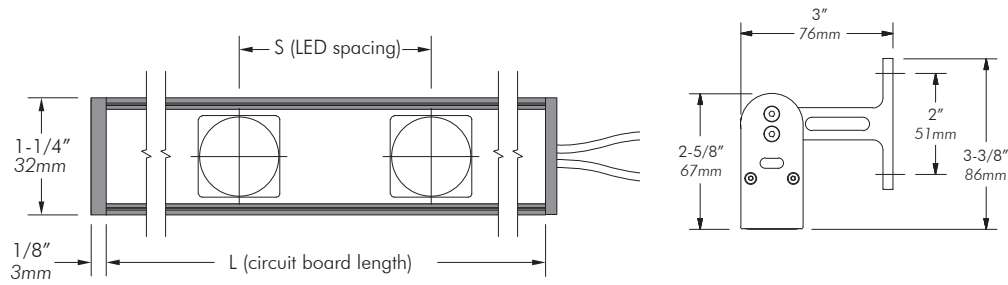


PHOTOMETRIC DATA:

4' Length, S2 Spacing, Frosted, 3000K std

Polar Candela Distribution

Illuminance at a Distance

Lumen: 1060lm, Narrow Flood (30°)



	Center Beam FC	Beam Width
1.0'	2966	0.6' 0.6'
3.0'	329.6	1.8' 1.8'
4.0'	185.4	2.4' 2.4'
6.0'	82.4	3.6' 3.6'
7.0'	60.5	4.2' 4.2'
9.0'	36.6	5.4' 5.4'


0° Spread: 33.2° 90° Spread: 33.1°

4' Length, S3 Spacing, Frosted, 3000K std

Polar Candela Distribution

Illuminance at a Distance

Lumen: 713lm, Narrow Flood (30°)



	Center Beam FC	Beam Width
1.0'	2480	0.5' 0.5'
3.0'	275.6	1.6' 1.6'
4.0'	155	2.2' 2.2'
6.0'	68.9	3.3' 3.3'
7.0'	50.6	3.8' 3.8'
9.0'	30.6	4.9' 4.9'

0° Spread: 30.7° 90° Spread: 30.6°