

L192

INTERIOR

Pendant | For ceilings

● Dry location



Ordering Information

Clear Form

Date : _____

Quantity : _____

Project : _____

Note : _____

Type : _____

Specifications

Luminaire | Example Code: L192-C1-4-W30H-C72-MA

Product	Canopy ¹	Length	CCT & CRI ²	Cord/Stem Length ³	Hardware Finish
L192					MA
	C1	2 2'	W22S 2200K 80+	Cord:	MA matte clear anodized
	C3	4 4'	W27H 2700K 90+	C72 72" (1830mm)	
	C4		W30H 3000K 90+	CX custom length	
			W35H 3500K 90+		
				Stem:	
				S6 6" (152mm)	
				SX custom length	

System Components (Ordered Separately)

Remote Driver : _____

* Consult MP Lighting Website or Factory.

Important Notes

Specification

1. See pg.3-5 - for different canopy options and its dimensions.
2. See pg.2 - for light quality and colour consistency details.
3. 72" (1830mm) cord or 6" (152mm) stem is included. Consult factory for custom cord/stem length.

Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

L192

INTERIOR

Pendant | For ceilings

● Dry location



Performance

Wattage	Forward Current	Power Consumption Budget per fixture (including driver)	LED output (Source)	Fixture Output (Delivered)
9W	350mA	10W	990 lm	264 lm
17W	700mA	18W	1870 lm	527 lm

Application

Environment	Dry Location approved. IP 20.
Mounting	Mounts to a 4" octagonal box using the mounting canopy.

Electrical

Power Supplies	Remote LED drivers (120-277V AC input, constant current output): Fixtures to be wired in series. Remote LED drivers (100-277V AC input, constant voltage output): Fixtures to be wired in parallel.
Control	On/off control Dimming: ELV or 0-10V dimming with appropriate drivers Other options (consult factory): TRIAC/MLV, DMX, DALI, Casambi, Power over Ethernet

Luminaire Construction

LED Light Source	W22S = CCT: 2200K, CRI (Ra): 80+, Colour Consistency: 3SDCM W27H = CCT: 2700K, CRI (Ra): 90+, Colour Consistency: 3SDCM W30H = CCT: 3000K, CRI (Ra): 90+, Colour Consistency: 3SDCM W35H = CCT: 3500K, CRI (Ra): 90+, Colour Consistency: 3SDCM
Standard Compliance	✓ WELL standard – Feature 58: Color Quality
Weight	2' pendant: 3.0lbs (1.4kg) 4' pendant: 6.0lbs (2.72kg)
Material	Fixture: PMMA Hardware: machined marine-grade aluminum
Supplied with	Standard installation housing: Comes with a canopy, a universal crossbar, two screws (depending on selected canopy option), and an allen key. Cord/stem: 6' (1830mm) cord or 6" (152mm) stem is included. Consult factory for custom cord/stem length.
Warranty & LED Life	5 years limited warranty Estimated useful life of LED is 50,000 hours.


Ordered Separately

System Components	Power supplies: remote driver Please consult factory or visit Recommended Drivers for available driver options.
-------------------	---


Mounting Options & Dimensions

LED Fixture Dimensions (shown with C1 canopy)

Fixture

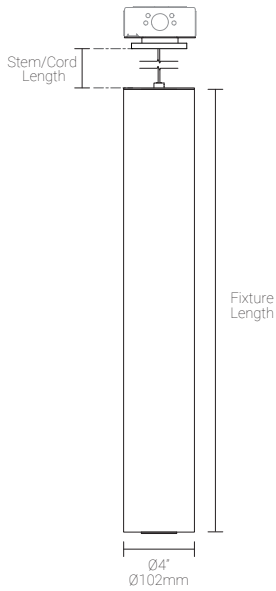


Front View



3D View




Beam

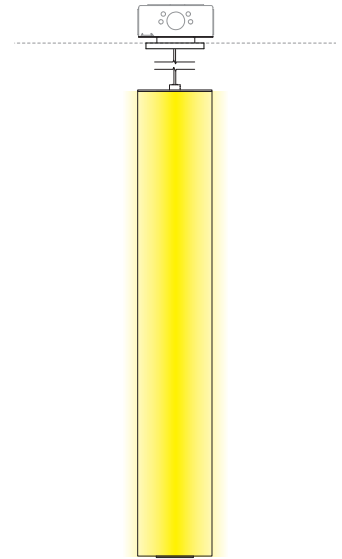

2', 9W, 3000K, 90+ CRI

Polar Candela Distribution




Illuminance at a Distance

Distance		Center Beam fc	Beam Width			
1.5ft	0.46m	44fc	-	-	-	-
3.0ft	0.91m	12fc	8.3ft	2.53m	8.5ft	2.59m
6.0ft	1.83m	3.3fc	16.6ft	5.06m	17.1ft	5.12m
9.0ft	2.74m	1.6fc	24.9ft	7.59m	25.6ft	7.80m
12.0ft	3.66m	1fc	33.2ft	10.12m	34.2ft	10.42m
15.0ft	4.57m	0.75fc	41.5ft	12.65m	42.7ft	13.01m
18.0ft	5.49m	0.55fc	49.8ft	15.18m	51.2ft	15.61m

Delivered Lumen: 261.7lm
 ■ Vertical Beam Spread: 108.2°
 ■ Horizontal Beam Spread: 109.8°

4', 17W, 3000K, 90+ CRI

Polar Candela Distribution



Illuminance at a Distance

Distance		Center Beam fc	Beam Width			
1.5ft	0.46m	82fc	-	-	-	-
3.0ft	0.91m	18fc	8.7ft	2.65m	8.7ft	2.65m
6.0ft	1.83m	6.6fc	17.4ft	5.30m	17.5ft	5.33m
9.0ft	2.74m	3.2fc	26.1ft	7.96m	26.2ft	7.99m
12.0ft	3.66m	2fc	34.8ft	10.61m	34.9ft	10.64m
15.0ft	4.57m	1.5fc	43.5ft	12.26m	43.7ft	13.32m
18.0ft	5.49m	1.1fc	52.2ft	15.91m	52.4ft	15.97m

Delivered Lumen: 508.1lm
 ■ Vertical Beam Spread: 110.9°
 ■ Horizontal Beam Spread: 111°

Mounting Options & Dimensions

C1




C3



C4



C22

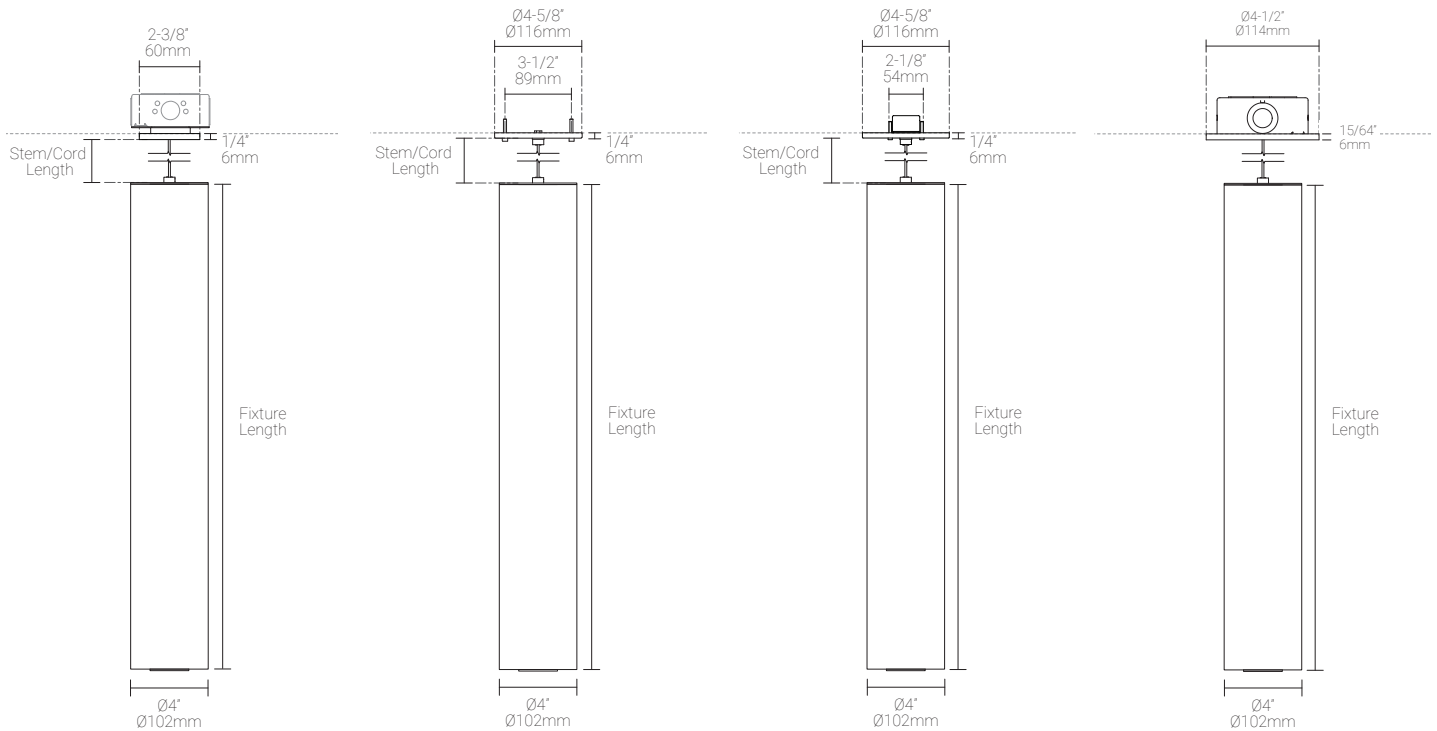

Full Spectrum

— Full Spectrum — Standard Illuminant @ 3000K — Ra≥80

