

P02

INTERIOR

Pendant | For ceilings

● Dry location



Ordering Information

Clear Form

Date :	_____	Quantity :	_____
Project :	_____	Note :	_____
Type :	_____		_____

Specifications

Luminaire | Example Code: P02-C20-FR-2-C72-MC

Product	Canopy ¹	Shade	Size	Cord ²	Hardware Finish
P02					
	C1	SM solid metal	2 2-3/4" (70mm) tall	Cord:	MC matte chrome
	C3	FR frosted glass		C72 72" (1830mm)	BN brushed nickel
	C4			CX custom length	
	C20				
	C22				

System Components (Ordered Separately)

Remote Driver : _____

* Consult MP Lighting Website or Factory.

Important Notes

Specification

- See pg.3-5 - for different canopy options and its dimensions.
- 72" (1830mm) cord included. Consult factory for custom cord length.

Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

P02

INTERIOR

Pendant | For ceilings

- Dry location



Application

Environment	Dry Location approved. IP 20.
Mounting	C1/C3/C4: Mounts to a 4" octagonal box using the mounting canopy. C20: Recess mounts to a surface with coil spring clips. C22: Threaded to a 4" octagonal box with the adapter & bracket.

Electrical

Power Supplies	Remote 120V, 75W Electronic Transformer. Included with C3 or C4 canopy only. Recommended: TLW120E75
Control	N/A

Luminaire Construction

LED Light Source	12V lamp (not included) Recommended: MR16 or BI-PIN
Weight	N/A
Material	Fixture: Opalescent cased glass Hardware: machined marine-grade aluminum
Supplied with	Standard installation housing: Comes with a canopy, a universal crossbar, two screws (depending on selected canopy option), and an allen key. Cord: 72" (1830mm) cord. Consult factory for custom cord length.
Warranty	5 years limited warranty

Ordered Separately

System Components	Power supplies: Remote 120V, 75W Electronic Transformer.
-------------------	-----------------------------------------------------------------



Mounting Options & Dimensions

LED Fixture Dimensions (shown with C1 canopy)

Fixture

3D View

Beam

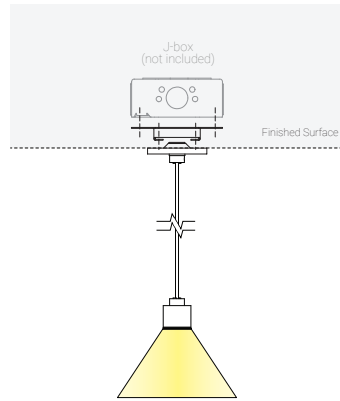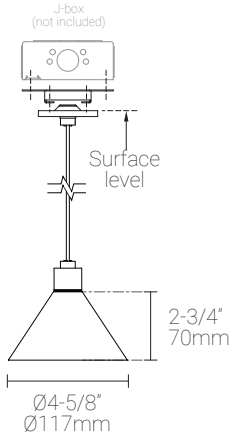

Canopy Images, Dimensions & Measurement of Custom Cord/Stem Length (X)

C1

C3

C4

C20

C22

