


- 1** Mount both brackets on L171 to wall with two screws on each. Bracket screws must be tight and firmly holding. Use recommended wall anchors to help support weight of rail system.
- 2** Connect fixture wires to low voltage wiring 24V DC constant voltage drivers with 120-277V input (TLDAV100W24)..

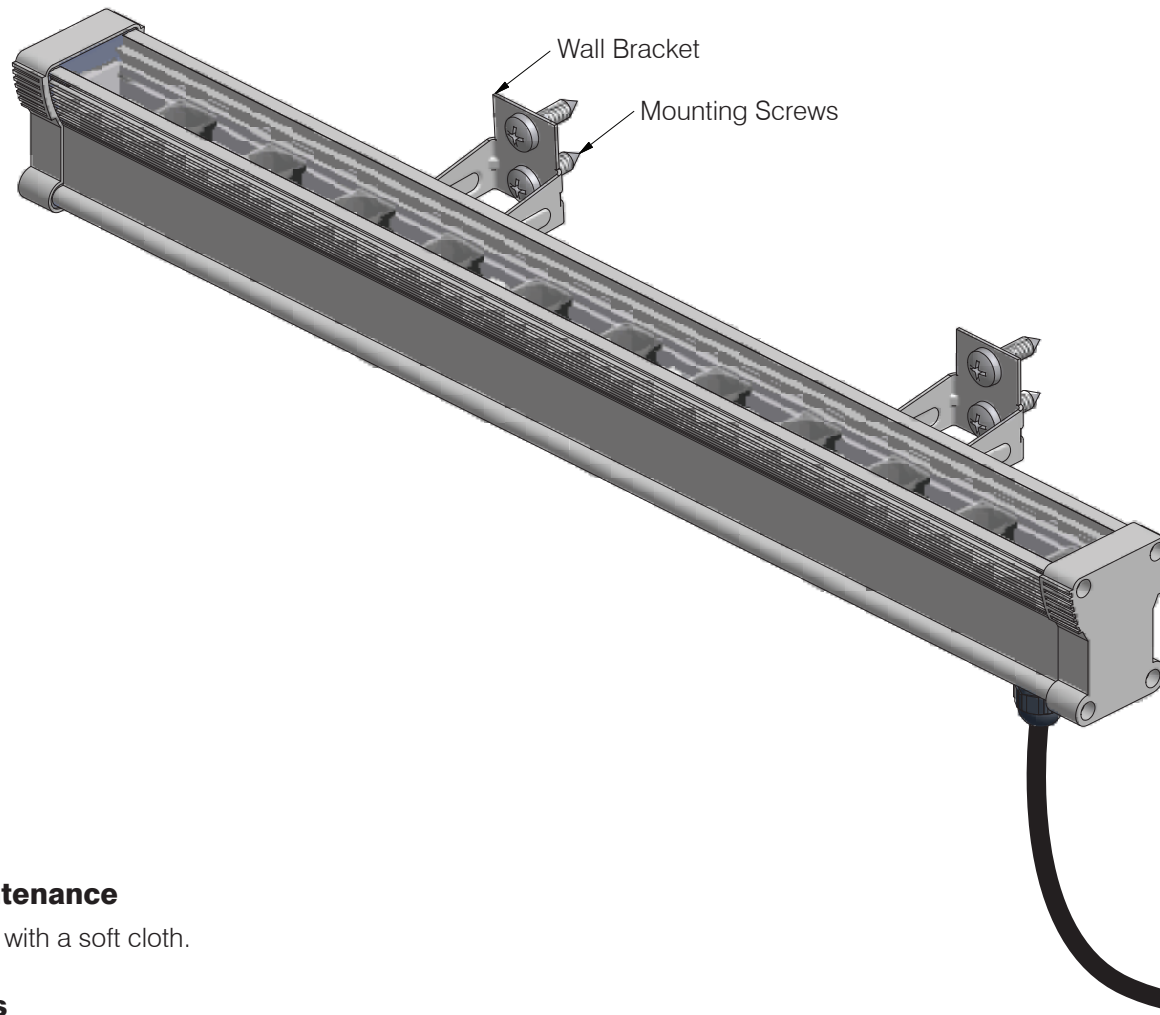

Maintenance

Clean with a soft cloth.

Tools

- Phillips screwdriver *not included*

[M] **MP LIGHTING**®

t 1.877.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

! CAUTION

- Read all instructions.
- **WARNING: RISK OF FIRE OR ELECTRICAL SHOCK:** Do not make or alter any openings in the compartment of wiring or electrical components during installation. Do not alter or add ballasts, or any other electrical components.
- Installation and use of this fixture mounting assembly requires a person familiar with the construction and operation of luminaire electrical systems and the hazards involved, if not qualified, do not attempt installation.
- Turn off power before installation.
- Connect to appropriate driver only.
- Avoid using detergents with hand softeners, anti-bacterial agents, glass cleaners or acrylic cleaning products.
- **KEEP THESE INSTALLATION INSTRUCTIONS.**

L171
Installation
Instructions