




EASY 3 COLORS  
**SELECTOR**  
3000K | 4000K | 5000K

## DIMENSION:

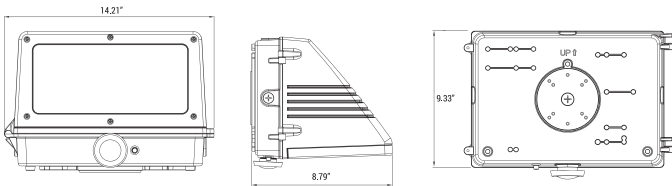

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
6000	5986	55 W
4500	4449	40 W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

## FEATURES

LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Keeping with the look of a traditional MH wall pack, while reducing energy consumption up to 80% and lasting over 50,000 hours. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.

## MULTI LUMEN/MULTI CCT

Easily field-selectable multi-lumen and multi-CCT selector switches allow you to easily change the intensity and CCT in the field.

LUMENS	4500/6000
CCT	30K/40K/50K
CRI	80+ Standard
COLOR QUALITY	3 Step MacAdam Ellipse
MOUNTING	Surface
DIMMING	DIM10 ( 0-10 dimming)
FINISH	Bronze
BEAM ANGLE	110°
WORKING TEMPERATURE	-40°C to 40°C (-22°F to 122°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

#### OPTICS

No UV or IR in the beam. Light is soft and uniform, safe to eyes. Stripe glass Diffuser.

#### CONSTRUCTION

Constructed from one-piece, die-cast aluminum housing, featuring an open front frame with a textured powder-coat finish over a chromate conversion coating. Chromate conversion coating provides excellent corrosion resistance and a higher electrical surface resistance. The housing is sealed with a one-piece silicone gasket that protects the optical assembly from outside contaminants.

#### MOUNTING

Wall mounted for area light delivering uniform, widespread high output.

#### OPTIONS & ACCESSORIES

Options and Accessories

Optional emergency battery back-up (EMG) option for emergency egress lighting

Optional photocell (PHC) detects changing light levels and saves energy by turning off during the day

#### DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Produce less than 20% THD, and have a power factor of .90 to 1.00.

#### DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277.

#### WARRANTY

Five-year warranty for parts and components (labor not included).

#### LISTING

cULus Listed  
Wet Location Listed  
Dark Sky Compliant

Example: **OWP-FC-201-LED-4500/6000L-DIM10-MVOLT-30K/40K/50K-BZ**

<b>OWP-FC-201-LED</b>						
<b>SERIES</b>	<b>LUMENS</b>	<b>DIMMING</b>	<b>VOLTAGE</b>	<b>CCT</b>	<b>FINISH</b>	<b>OPTION</b>
Wall Mount Wall Pack	4500/6000L	DIM10 - 0-10V Dimming	MVOLT	30K/40K/50K	BZ - Bronze	PHC - Photocell EMG - Emergency PIR - PIR Sensor FS-305RC - Wattstopper Motion Sensor