



B000000	1.0000000000000000000000000000000000000
BEST 100 C	V 25000000000000000000000000000000000000
BUCK-1980	- BASSESSESSESSESSESSESSESSESSESSESSESSESSE
10000000	CHOCK PORTS COLUMN
8023 (1998)	A STATE OF THE PARTY OF THE PAR
E252.00	A PARTY OF THE PAR
DOTATION OF THE PARTY OF THE PA	THE RESIDENCE OF THE PARTY OF T
1000000	THE PROPERTY AND ADDRESS OF THE PARTY AND ADDR
52/20/200	C2000000000000000000000000000000000000
10000000	
1800000	
BESCHOOL -	
SEC. 2000	230000000000000000000000000000000000000
5000000	2 TA 1 TO 1
BERGERS 1	- CONTROL OF COLUMN
10000000	- VEX.52000000000000000000000000000000000000
900000	
10.00000	N. CONTROL OF THE PROPERTY OF
100,000,000	) (NUMERA & ORGANICAL STATE OF THE STATE OF
ERROR OF THE PARTY	1.72 56250505050
06000000	- A 19 TO A 19
10029444	CANADA SANCE OF THE SANCE OF TH
00000000	THE RESIDENCE OF THE PARTY OF T
100000	
10000000	CONTRACTOR OF THE PROPERTY OF
10000000	CONTRACTOR OF THE PROPERTY OF
DOM: NO.	4 (4 (4 (4 (4 (4 (4 (4 (4 (4 (4 (4 (4 (4
0000000	-XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
DESCRIPTION OF THE PERSON OF T	
DESCRIPTION .	100000000000000000000000000000000000000
10000000	
100000000	TO SECURE A
10000000	325250000000000000000000000000000000000
1000000	
12576000	
1000000	
1000001	- Marie 1990 (1990)
	A STATE OF THE PARTY OF THE PAR
D752790F	The second secon
E5000001	A 100 (190 (190 A 190 )
12/2/2005	- A STEEL STOLEN
20080000	14.60 (PROVED 10)
BECOME:	
10033500	
B230301	Name and Address of the Control of t
SECTION C.	
STATE OF THE PARTY	A CONTRACTOR OF THE PARTY OF TH
BELLEGISM AND ADDRESS	
	- William Control
Lr-60 in Enviro Oil-Dubbed Bronze (FOR)	
( Jr-60 in Enviro Oil-Rubbed Bronze (EOB)	
	MTER7E.

APPLICATIONS	Direct/Indirect grazing luminaire for exterior/interior use: flanking doors, on columns, on building facades, between windows, corridors, and elevator lobbies		
SIZES	<ul> <li>30" H x 9" W x 4"D, 18 lbs</li> <li>60" H x 9" W x 4"D, 36 lbs</li> </ul>		
MOUNTING	<ul> <li>J-Box 3.0 or 4.0 at center or end of fixture</li> <li>Steel mounting system with mounting plate and cover with rubber gaskets between the junction box and mounting plate</li> <li>Can be mounted vertically or horizontally</li> </ul>		
SPECIFICATIONS	<ul> <li>High efficiency, fully integrated propietary LED module</li> <li>IP66 Rated</li> <li>120-277V input</li> <li>100,000+ hours rated life time</li> <li>10 Year Limited Warranty (excludes shade)</li> <li>Title 24 Compliant</li> <li>ADA Compliant</li> </ul>		
LAMPING	<ul> <li>3000K, 3500K</li> <li>30" - 760 delivered lumens</li> <li>60" - 1221 delivered lumens</li> <li>0-10V Dimming (100-10%)</li> </ul>		
CONSTRUCTION	Fixture shell (shade): Heavy gauge aluminum with industrial powder coat finish and high impact acrylic		

SPECIFICATIONS SUBJECT TO CHANGE














## METAL POWDER COAT FINISH OPTIONS



DB - Dark Bronze

GR - Graphite



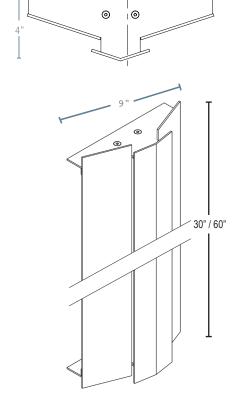



## ORDER CODE:

BLK - Black

URDER CODE:			
TEX-JR			
MODEL	LENGTH  30 30"  60 60"	METAL TRIM POWDER COAT FINISH OPTIONS  ESN Enviro Satin Nickel EOB Enviro Oil-Rubbed Bronze DB Dark Bronze GR Graphite WHT White BLK Black	CCT 3000 3000K 3500 3500K 4000 4000K