


AJ EKLIPTA SURFACE

Project name:

Project type:

Notes:

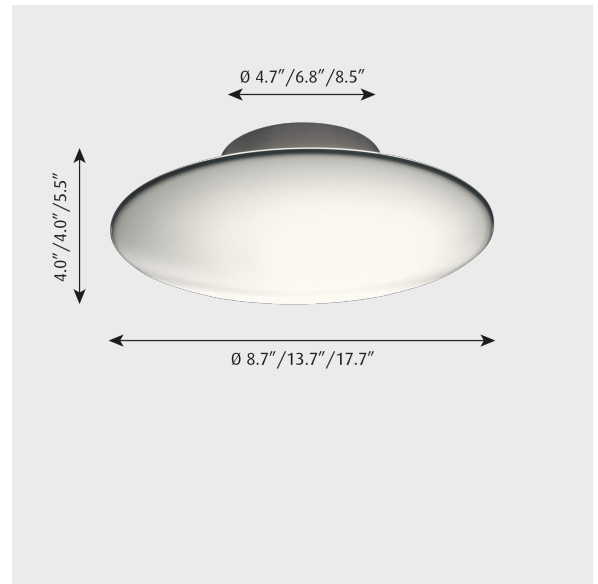

Design

Arne Jacobsen

Product description

Designed by Arne Jacobsen for the Rodovre Town Hall in 1959. It has survived the test of time and is still relevant in many projects today. It is a surface mounted luminaire with a single, handblown circular glass shade that appears as floating. The three-layer opal and clear glass diffuses the light. The transparent edge, providing a decorative halo of light around the fixture. Available in three size—8.7", 17.7" and 13.7". The original incandescent variants may be used in wet locations as well as for phase dimming installations. The LED variants are for dry or damp locations with 0-10V dimming control.

Variant options

Dimension	Light source	Lumen	Voltage frequency	Class	Lighting control
13.7 IN	1x100W A-19/IF medium US	-	120-277V/60HZ	-	-
17.7 IN	1x40W G9	1937	120V	I	Dim 0-10v
8.7 IN	1x60W A-19/IF Medium US	371			
	LED 3000K 10W	705			
	LED 3000K 24W				

Specification notes

- a. 8.7 IN size available only in either 10W LED/3000K or 40W T-4/G9 lampping.
- b. 13.7 IN size available in either 10W LED/3000K/DIM 0-10V or 60W/A-19 lampping.
- c. 17.7 IN size available in either 24W LED/3000K/DIM 0-10V or 100W/A-19 lampping. D. Dim 0-10V only available for 13.7 IN and 17.7 IN sizes.

Light description

The glass shade emits soft, comfortable light. The shade appears brightest at the center and dims radially to the glowing edge of glass. A portion of light is reflected onto the mounting surface for a gradual transition from dark to light, thereby reducing glare. LEDs are standard CCT in 3000K.

Mounting

Surface: 8.7" variants mount directly onto a 3" or 4" octagonal outlet box. 13.7" variants are anchored directly to the surface over an outlet box with four mounting points at the corners of a 4.2" square. 17.7" variants are anchored directly to the surface over an outlet box with four mounting points at the corners of a 6.0" x 4.3" rectangle. Load-bearing anchors & screws provided by others. All variants may be ceiling or wall mounted.

Incandescent variants may be installed in dry, damp, or wet locations. LED variants may be installed in dry or damp locations. 8.7" and 13.7" sizes meet ADA requirements for less than 4" projection from the wall.

Information

Electrical:
 LED System Wattage: 10W or 24W
 LED Wattage: 9W or 22W
 Delivered lumens: 371 - 1,937
 Efficacy: 37.1 lm/W - 80.7 lm/W
 Certifications: cULus, Wet Location (Incandescent variants), Damp location (LED variants)
 Protection class IP20
 Controllability: 0-10V Dimming, Phase Dimming
 Color Rendering: Ra≥90

Other functions

Alternative housing finishes. Alternative dimming controls for LED variants. LED in 2700K, 4000K and 5000K. Pendant style mounting.


Specification notes

- a. 8.7 IN size available only in either 10W LED/3000K or 40W T-4/G9 lampping.
- b. 13.7 IN size available in either 10W LED/3000K/DIM 0-10V or 60W/A-19 lampping.
- c. 17.7 IN size available in either 24W LED/3000K/DIM 0-10V or 100W/A-19 lampping.


Light distribution diagrams

For the full data set on all variants, see louispoulsen.com.


Cartesian

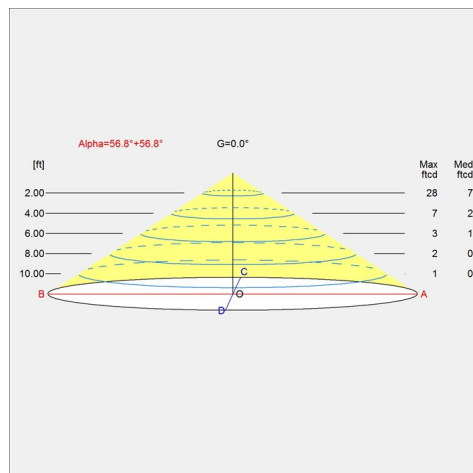

Isolux

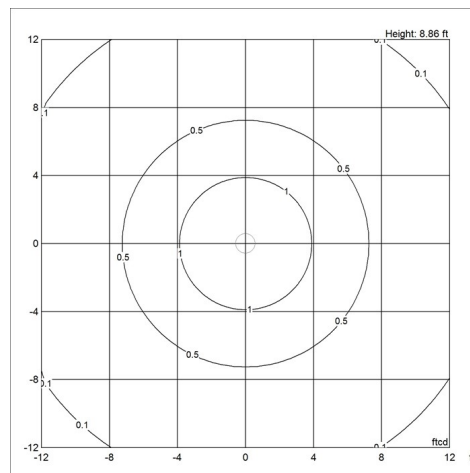

Polar

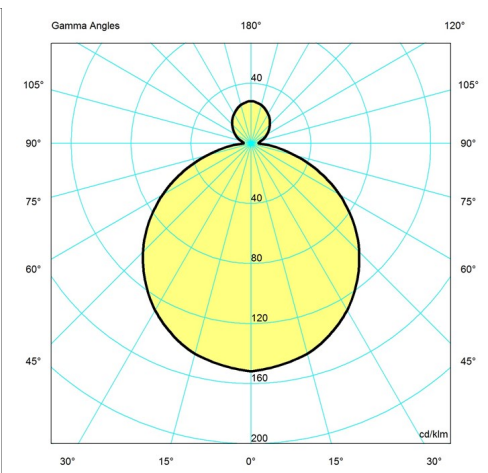

Material

Glass shades are three-layered, glossy, opal white, handblown glass 0.2 IN thick. Housings are cast aluminum (8.7") or spun aluminum (13.7" & 17.7"), 0.08" thick, powder coated white. Internal brackets are aluminum, 0.06" thick. Sockets are porcelain. 8.7 IN LED variant has a C. O. B. style LED that takes 120V AC line Voltage directly and is dimmable by leading and forward phase dimming controls, and has an opal white diffusing enclosure. 13.7" and 17.7" sizes have integral electronic constant current, class II driver for 120-277V operation and 0-10V dimming control. Housing finish is matte surface powder coat with minimum 2 mils thickness in white.

Weight

Min: 1.283 lbs Max: 8.999 lbs

Dimensions

13.7 IN, 17.7 IN, 8.7 IN

Finish

White

Voltage

120-277V/60HZ, 120V

Variant options

Dimension	Light source	Lumen	Voltage frequency	Class	Lighting control	Variant number
13.7 IN	LED 3000K 10W	705	120-277V/60HZ	I	Dim 0-10v	10000121108
8.7 IN	1x40W G9	-	120V	I	-	5743908011
17.7 IN	LED 3000K 24W	1937	120-277V/60HZ	I	Dim 0-10v	10000121113
13.7 IN	1x60W A-19/IF Medium US	-	120V	I	-	5842905400
17.7 IN	1x100W A-19/IF medium US	-	120V	I	-	5842905426
8.7 IN	LED 3000K 10W	371	120V	-	-	5743911192