


## AJ EKLIPTA WALL

Designed by Arne Jacobsen

---

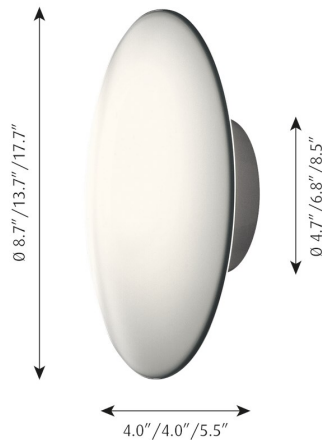

---

### Description

The fixture emits soft comfortable light. The glass is designed to provide a uniformly lit surface. The three-layer hand blown opal glass shade has a transparent edge, providing a decorative halo of light around the fixture.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000121108	WHT, 062	13.8 / 3.9 / 13.8 IN / 6.0 LB
10000121113	WHT, 062	17.7 / 5.5 / 17.7 IN / 9.0 LB
5743908011	WHT, 062	8.7 / 4.1 / 8.7 IN / 1.3 LB
5743911192	WHT, 062	8.7 / 4.1 / 8.7 IN / 1.8 LB
5842905400	WHT, 062	13.8 / 3.9 / 13.8 IN / 6.0 LB
5842905426	WHT, 062	17.7 / 5.5 / 17.7 IN / 9.0 LB

---

### Materials & Finishes

#### MATERIALS

Ceiling/Wall box: Spun aluminum. Diffuser: Hand blown white opal glass.

#### FINISHES

White, powder coated. White opal glass.

---

# louis poulsen

## Mounting


Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box (13.7"/17.7") or 3" octagonal junction box (8.7"). For mounting instructions, see download section on the product detail page.

## Information


Electrical:  
 LED System Wattage: 10W or 24W  
 LED Wattage: 9W or 22W  
 Delivered lumens: 371 - 1,937  
 Efficacy: 37.1 lm/W - 80.7 lm/W  
 Certifications: cULus, Wet Location (Incandescent variants), Damp location (LED variants)  
 Protection class IP20  
 Controllability: 0-10V Dimming, Phase Dimming  
 Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

## Light distribution diagrams


### CARTESIAN

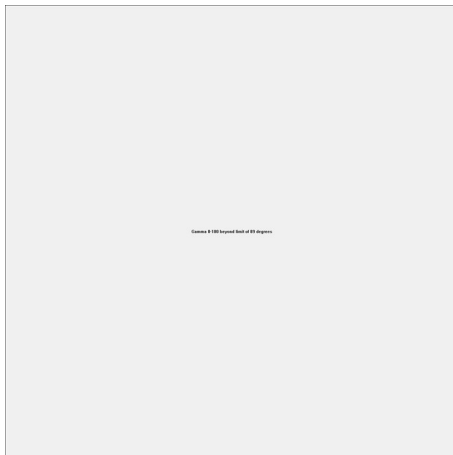

### ISOLUX

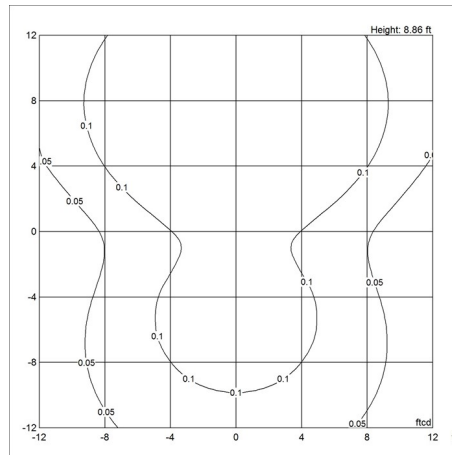

### POLAR

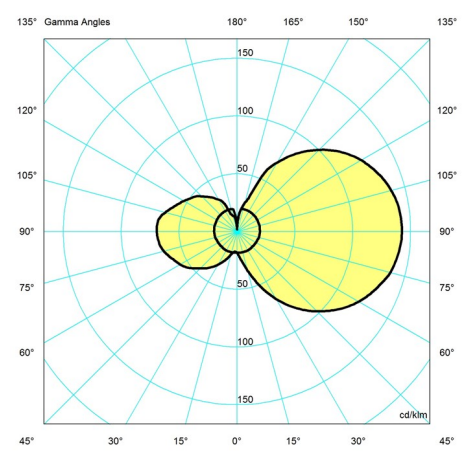

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000121108	LED 3000K 10W	120-277V/60HZ	705	Dim 0-10v	-
10000121113	LED 3000K 25W	120-277V/60HZ	1628	Dim 0-10v	-
5743908011	1x40W G9	120V	312	-	-
5743911192	LED 3000K 10W		371	-	-
5842905400	1x60W A-19/IF Medium US	120V	396	-	-
5842905426	1x100W A-19/IF medium US	120V	502	-	-

Specification  
Notes

- a. 8.7" variant available in 40W or 10W LED.
  - b. 13.7" variant available in 60W or 10W LED.
  - c. 17.7" variant available in 100W or 24W LED.
  - d. 120-277V only available in 10W LED with 13.7" or 24W LED with 17.7".
  - e. DIM 0-10V only available with LED light source.
-